
ORDER NO.PCZ0604031CE

Service Manual

Plasma Television

TH-50PV600E / TH-50PX600B GP9DE Chassis

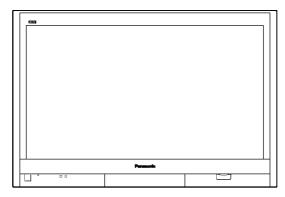

SPECIFICATIONS

Specifications

'ower Source AC 220-240 V, 50 / 60 Hz

ower Consumption

Average use 368 W (TH-50PV600E), 377W (TH-50PX600B)

Standby condition 0.3 W (TH-50PV600E)

0.3 W (TH-50PV600E Without DVB recording), 20W (TH-50PX600B with DVB recording)

Plasma Display panel

Drive method AC type
Aspect Ratio 16:9
Contrast Ratio Max 10000:1
//isible screen size 127 cmV

 $W \times H \times Diagonal$ 1,106 mm (W) \times 622 mm (H) \times 1,269 mm (diagonal) No. of pixels) 1,049,088 (1,366 (W) \times 768 (H)) [4,098 \times 768 dots]

Sound

Speaker Woofer (ϕ 80 mm) × 2 pcs, Tweeter (23 mm × 100 mm) × 2 pcs

Audio Output 31 W (15.5 W + 15.5 W), 10% THD

Headphones $\phi_{
m 3.5~mm}$ stereo mini Jack × 1

²C signals VGA, SVGA, XGA

SXGA (compressed)

Horizontal scanning frequency 31 - 69 kHz Vertical scanning frequency 59 - 86 Hz Receiving Systems / / Band PAL B, G, H, I, SECAM B, G SECAM L / L' name (TH-50PV600E) VHF E2 - E12 VHF H1 - H2 (ITALY) VHF A - H (ITALY) **UHF E21 - E69** CATV (S01 - S05) CATV S1 - S10 (M1 - M10) CATV S11 - S20 (U1 - U10) CATV S21 - S41 (Hyperband) PAL D. K. SECAM D. K VHF R1 - R2 VHF R3 - R5 VHF R6 - R12 **UHF E21 - E69** PAL 525/60 Playback of NTSC tape from some PAL Video recorders (VCR) M.NTSC Playback from M. NTSC Video recorders (VCR) NTSC (AV input only) Playback from NTSC Video recorders (VCR) Receiving Systems / / Band PAL I name (TH-50PX600B) UHF E21 - 68. PAL 525/60 Playback of NTSC tape from some PAL Video recorders (VCR) or NTSC disc playback from DV player and recorder. DVB Digital terrestrial services via UHF aerial input. M.NTSC Playback from M.NTSC Video recorders (VCR). NTSC (AV input only) Playback from NTSC Video recorders (VCR). **\erial - Rear** VHF / UHF (TH-50PV600E), UHF (TH-50PX600B) **Operating Conditions** Temperature: 0 °C - 40 °C Humidity: 20 % - 80 % RH (non-condensing) **Connection Terminals AV1 (Scart terminal)** 21 Pin terminal (Audio / Video in, Audio / Video out, RGB in) AV2 (Scart terminal) 21 Pin terminal (Audio / Video in, Audio / Video out, S-Video in, Q-Link) 21 Pin terminal (Audio / Video in, Audio / Video out, RGB in, S-Video in, Q-Link) AV3 (Scart terminal) **VIDEO** AV4 RCA PIN Type × 1 1.0 V[p-p] (75 Ω) S-VIDEO Mini DIN 4-pin Y:1.0 V[p-p] (75 Ω) C:0.286 V[p-p] (75 Ω) AUDIO L - R RCA PIN Type × 2 0.5 V[rms] Others COMPONENT 1.0 V[p-p] (including synchronization) PB, PR ±0.35 V[p-p] **HDMI 1/2 TYPE A Connectors** PC **HIGH-DENSITY D-SUB 15PIN** R,G,B/0.7 V[p-p] (75 Ω)

HD, VD/TTL Level 2.0 - 5.0 V[p-p] (high impedance)

AUDIO L - R RCA PIN Type × 2 0.5 V[rms]

CARD slot SD CARD slot x 1

Output AUDIO L - R RCA PIN Type × 2 0.5 V[rms] (high impedance)

Dimensions (W×H×D)

1,266 mm × 802 mm × 138 (panel part: 95) mm

Veight

43.0 kg Net

lotes:

- -Design and Specifications are subject to change without notice. Weight and Dimensions shown are approximate.
- -This equipment complies with the EMC standards listed below.

EN55013, EN61000-3-2, EN61000-3-3, EN55020, EN55022, EN55024.

⚠ WARNING

This service information is designed for experienced repair technicians only and is not designed for use by the general public. It does not contain warnings or cautions to advise non-technical individuals of potential dangers in attempting to service a product. Products powered by electricity should be serviced or repaired only by experienced professional technicians. Any attempt to service or repair the product or products dealt with in this service information by anyone else could result in serious injury or death.

anasor

1. Applicable signals

Applicable input signal for Component (Y, PB, PR), HDMI and PC (D-sub 15P) (* Mark)

Signal name	Horizontal frequency (kHz)	Vertical frequency (Hz)	Component	номі	PC
525 (480) / 60i	15.73	59.94	*	*	
525 (480) / 60p	31.47	59.94	*	*	
625 (576) / 50i	15.63	50.00	*	*	
625 (576) / 50p	31.25	50.00	*	*	
750 (720) / 60p	45.00	60.00	*	*	
750 (720) / 50p	37.50	50.00	*	*	
1,125 (1,080) / 60i	33.75	60.00	*	*	
1,125 (1,080) / 50i	28.13	50.00	*	nje	
640 x 400 @ 70 Hz	31.46	70.07			*
640 x 480 @60 Hz	31.47	59.94			*
640 x 480 @ 75 Hz	37.50	75.00			*
800 × 600 @60 Hz	37.88	60.32			*
800 x 600 @ 75 Hz	46.88	75.00			*
800 x 600 @85 Hz	53.67	85.06			*
1,024 × 768 @60 Hz	48.36	60.00			*
1,024 × 768 @ 70 Hz	56.48	70.07			*
1,024 x 768 @75 Hz	60.02	75.03			*
1,024 × 768 @85 Hz	68.68	85.00			*
1,280 x 1,024 @ 60 Hz	63.98	60.02			*
Macintosh13" (640 x 480)	35.00	66.67			*
Macintosh16" (832 x 624)	49.72	74.54			*
Macintosh21" (1,152 x 870)	68.68	75.06			*

Note: Signals other than above may not be displayed properly.

The above signals are reformatted for optimal viewing on your display.

2. Safety Precautions

2.1. General Guidelines

- 1. When servicing, observe the original lead dress. If a short circuit is found, replace all parts which have been overheated or damaged by the short circuit.
- 2. After servicing, see to it that all the protective devices such as insulation barriers, insulation papers shields are properly installed.
- 3. After servicing, make the following leakage current checks to prevent the customer from being exposed to shock hazards.

2.2. Touch-Current Check

- 1. Plug the AC cord directly into the AC outlet. Do not use an isolation transformer for this check.
- 2. Connect a measuring network for touch currents between each exposed metallic part on the set and a good earth ground such as a water pipe, as shown in Figure 1.
- 3. Use Leakage Current Tester (Simpson 228 or equivalent) to measure the potential across the measuring network.
- 4. Check each exposed metallic part, and measure the voltage at each point.
- 5. Reserve the AC plug in the AC outlet and repeat each of the above measure.
- 6. The potential at any point (TOUGH CURRENT) expressed as voltage U₁ and U₂, does not exceed the following values:

For a. c.: $U_1 = 35 \text{ V (peak)}$ and $U_2 = 0.35 \text{ V (peak)}$; For d. c.: $U_1 = 1.0 \text{ V}$,

Note:


The limit value of $U_2 = 0.35$ V (peak) for a. c. and $U_1 = 1.0$ V for d. c. correspond to the values 0.7 mA (peak) a. c. and 2.0 mA d. c.

The limit value $U_1 = 35 \text{ V}$ (peak) for a. c. correspond to the value 70 mA (peak) a. c. for frequencies greater than 100 kHz.

7. In case a measurement is out of the limits specified, there is a possibility of a shock hazard, and the equipment should be repaired and rechecked before it is returned to the customer.

Figure 1

Measuring network for TOUCH CURRENTS

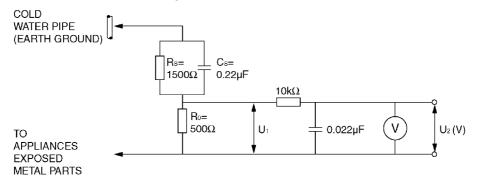

Resistance values in ohms (Ω)

V: Voltmeter or oscilloscope (r.m.s. or peak reading)

> Input resistance: $\geq 1 \text{ M}\Omega$ Input capacitance: $\leq 200 \text{ pF}$

Frequency range: 15 Hz to 1 MHz and d.c. respectively

NOTE - Appropriate measures should be taken to obtain the correct value in case of non-sinusoidal waveforms.

3. Prevention of Electro Static Discharge (ESD) to Electrostatically Sensitive (ES) Devices

Some semiconductor (solid state) devices can be damaged easily by static electricity. Such components commonly are called Electrostatically Sensitive (ES) Devices. Examples of typical ES devices are integrated circuits and some field-effect transistors and semiconductor "chip" components. The following techniques should be used to help reduce the incidence of component damage caused by electro static discharge (ESD).

- 1. Immediately before handling any semiconductor component or semiconductor-equipped assembly, drain off any ESD on your body by touching a known earth ground. Alternatively, obtain and wear a commercially available discharging ESD wrist strap, which should be removed for potential shock reasons prior to applying power to the unit under test.
- 2. After removing an electrical assembly equipped with ES devices, place the assembly on a conductive surface such as alminum foil, to prevent electrostatic charge buildup or exposure of the assembly.
- 3. Use only a grounded-tip soldering iron to solder or unsolder ES devices.
- 4. Use only an anti-static solder removal device. Some solder removal devices not classified as "anti-static (ESD protected)" can generate electrical charge sufficient to damage ES devices.
- 5. Do not use freon-propelled chemicals. These can generate

electrical charges sufficient to damage ES devices.

- 6. Do not remove a replacement ES device from its protective package until immediately before you are ready to install it. (Most replacement ES devices are packaged with leads electrically shorted together by conductive foam, alminum foil or comparable conductive material).
- 7. Immediately before removing the protective material from the leads of a replacement ES device, touch the protective material to the chassis or circuit assembly into which the device will be installed.

Caution

Be sure no power is applied to the chassis or circuit, and observe all other safety precautions.

8. Minimize bodily motions when handling unpackaged replacement ES devices. (Otherwise hamless motion such as the brushing together of your clothes fabric or the lifting of your foot from a carpeted floor can generate static electricity (ESD) sufficient to damage an ES device).

IMPORTANT SAFETY NOTICE

There are special components used in this equipment which are imporant for safety. These parts are marked by Δ in the schematic diagrams, Exploded Views and replacement parts list. It is essential that these critical parts should be replaced with manufacturer's specified parts to prevent shock, fire, or other hazards. Do not modify the original design without permission of manufacturer.

4. About lead free solder (PbF)

Note: Lead is listed as (Pb) in the periodic table of elements.

In the information below, Pb will refer to Lead solder, and PbF will refer to Lead Free Solder.

The Lead Free Solder used in our manufacturing process and discussed below is (Sn+Ag+Cu).

That is Tin (Sn), Silver (Ag) and Copper (Cu) although other types are available.

This model uses Pb Free solder in it's manufacture due to environmental conservation issues. For service and repair work, we'd suggest the use of Pb free solder as well, although Pb solder may be used.

PCBs manufactured using lead free solder will have the PbF within a leaf Symbol




stamped on the back of PCB.

Caution


- Pb free solder has a higher melting point than standard solder. Typically the melting point is 50 ~ 70 °F (30~40 °C) higher. Please use a high temperature soldering iron and set it to 700 \pm 20 °F (370 \pm 10 °C).

- Pb free solder will tend to splash when heated too high (about 1100 °F or 600 °C).
 - If you must use Pb solder, please completely remove all of the Pb free solder on the pins or solder area before applying Pb solder. If this is not practical, be sure to heat the Pb free solder until it melts, before applying Pb solder.
- After applying PbF solder to double layered boards, please check the component side for excess solder which may flow onto the opposite side. (see figure below)

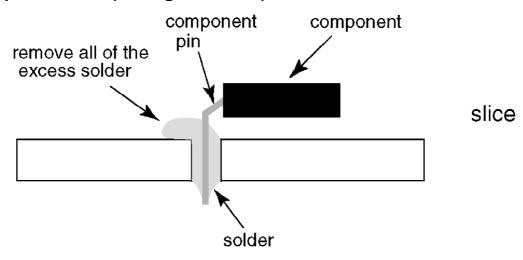


Suggested Pb free solder


There are several kinds of Pb free solder available for purchase. This product uses Sn+Ag+Cu (tin, silver, copper) solder. However, Sn+Cu (tin, copper), Sn+Zn+Bi (tin, zinc, bismuth) solder can also be used.

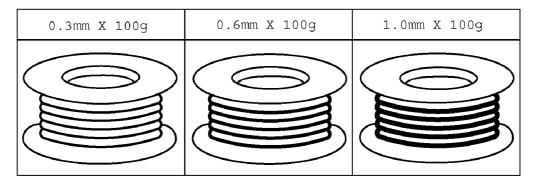

5. Service Hint

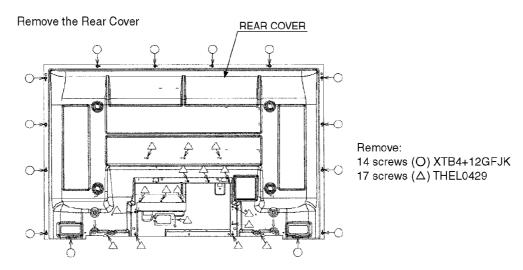

Service Position

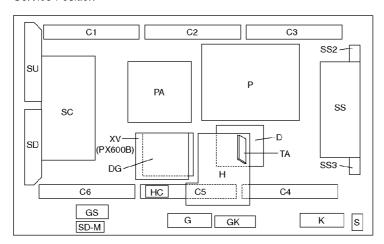

Board Name	Function	Board Name	Function
Р	Power Supply	C1	Data Driver (Upper Right)
PA	DC-DC Converter, Power SOS, /	C2	Data Driver (Upper Center)
	Speaker out, Audio AMP, Fan Control	C3	Data Driver (Upper Left)
Н	AV Terminal, AV Switch, MSP	C4	Data Driver (Lower Left)
TA	Tuner	C5	Data Driver (Lower Center)
DG	Digital Signal Processor, Micom, HDMI Interface	C6	Data Driver (Lower Right)
XV	D-TV Interface (PX600B only)	SC	Scan Drive
D	Format Converter, Plasma Ai, Sub- Field Processor	SU	Scan out (Upper)
НС	Jig Connection	SD	Scan out (Lower)
K	Remote receiver, Power LED	SS	Sustain Drive
S	Power Switch	SS2	Sustain Connector (Upper)
G	Front Terminal	SS3	Sustain Connector (Lower)

Board Name	Function	Board Name	Function
GK	Key Switch	SD-M	SD Module (MPEG4/PHOTO viev
GS	SD Card Slot		recording)
			None serviceable.
			SD Module should be exchanged
			service.


6. Plasma panel replacement method

6.1. Remove the Back cover

1. See Service Hint (Section 5)


6.2. Remove the fan

- 1. Disconnect the relay couplers.
- 2. Remove the screws ($\times 3 \rightarrow$ each) and remove the fans.

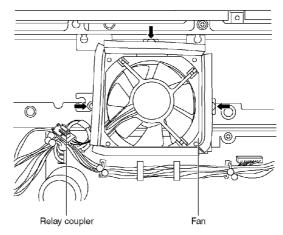


6.3. Remove the Speaker box ass'y (left)

- 1. Unlock the cable clampers to free the cable.
- 2. Disconnect the relay coupler.
- 3. Remove the Speaker box ass'y (left).

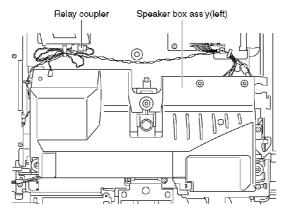

6.4. Remove the Speaker box ass'y (right)


- 1. Unlock the cable clampers to free the cable.
- 2. Disconnect the relay coupler.
- 3. Remove the Speaker box ass'y (right).

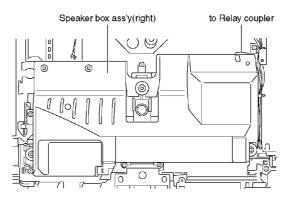

6.5. Remove the tuner cover



2. Remove the tuner cover.

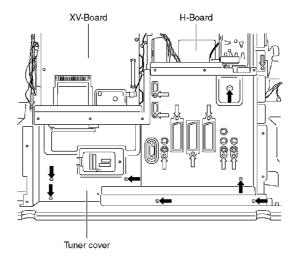


6.6. Remove the P-Board


Caution:

To remove P.C.B. wait 1 minute after power was off for discharge from electrolysis capacitors.


- 1. Disconnect the couplers (P2, P5, P9, P10, P11, P12, P23 and P25).
- 2. Remove the screws (×6→) and remove the P-Board unit.

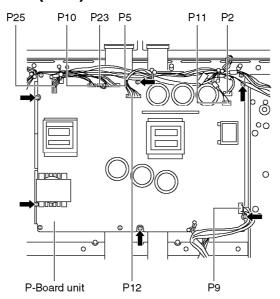

3. Remove the screws (×9→) on the back side.

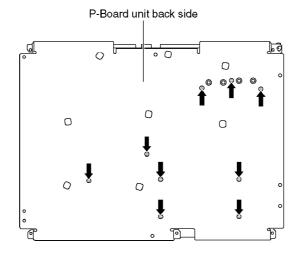


- 4. Remove the screws (×5→).
- 5. Remove the molding props (×8⇒).
- 6. Remove the P-Board.

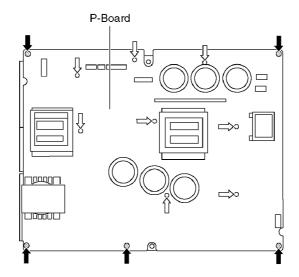


Note:

When assembling the P-Board, the position of each hole of the insulation sheets (A and B) is set to the position of each hole of the P-Board, then assemble them. (➡ marks indicate setting positions.)

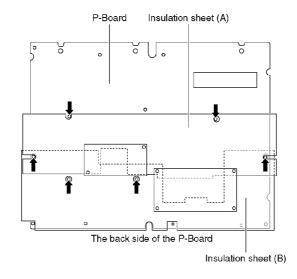

6.7. Remove the PA-Board


- 1. Unlock the cable clampers to free the cable.
- 2. Disconnect the couplers (PA1, PA2, PA5, PA10, PA31, PA32, PA33, PA34 and PA40).
- 3. Disconnect the flexible cable (PA20).
- 4. Remove the screws (×4→) and remove the earth cable.
- 5. Remove the PA-Board.

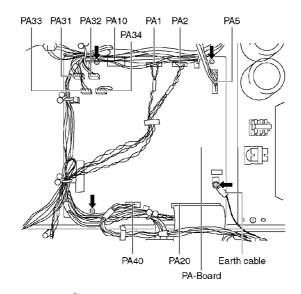

6.8. Remove the tuner unit

- 1. Unlock the cable clampers to free the cable.
- 2. Disconnect the couplers (DG5, G51, H52, PA40 and earth cable).


- 3. Disconnect the flexible cables (DG3 and PA20).
- 4. Disconnect the relay couplers and remove the speaker cables.
- 5. Remove the screws (×4→) remove the tuner unit.

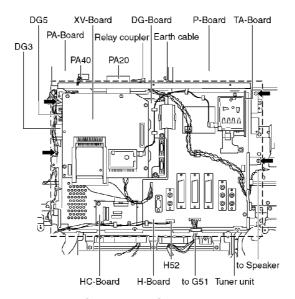

6.9. Remove the XV-Board (PX600B)


- 1. Unlock the cable clampers to free the cable.
- 2. Disconnect the tuner cable.
- 3. Remove the screws (x5→) remove the XV-Board.

 (Be careful the coupler (XV01-DG22) when remove the XV-Board.)

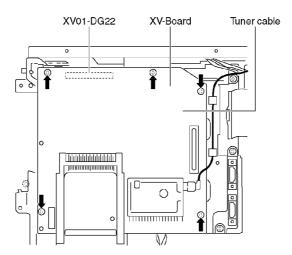


6.10. Remove the DG-Board

- 1. Remove the XV-Board (PX600B). (See section 6.9.)
- 2. Remove the screws (×8→) and remove the XV-Board metal frame (PX600B).

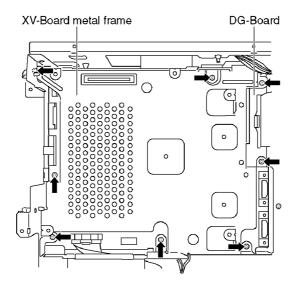


- 3. Disconnect the coupler (DG2).
- 4. Disconnect the flexible cables (DG1, DG15 and DG20).
- 5. Remove the screw (×1→) remove the DG-Board.

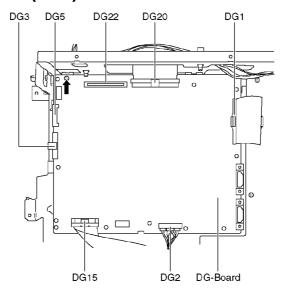


6.11. Remove the TA-Board

- 1. Disconnect the tuner cable.
- 2. Remove the screw (×1→) and remove the TA-Board.

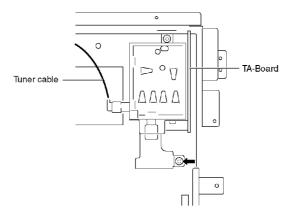


6.12. Remove the H-Board

- 1. Remove the TA-Board. (See section 6.11.)
- 2. Unlock the cable clampers to free the cable.
- 3. Disconnect the couplers (H2, H40 and H51).
- 4. Disconnect the flexible cable (H1).
- 5. Remove the screws (×5→) and remove the H-Board.

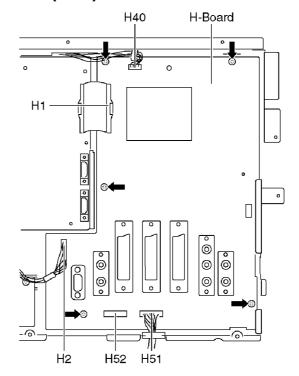


6.13. Remove the HC-Board

- 1. Disconnect the flexible cable (HC15).
- 2. Remove the screws (×2→) and remove the HC-Board.

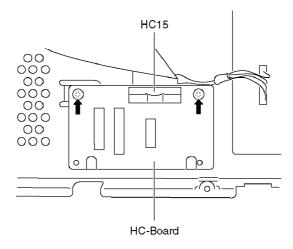


6.14. Remove the D-Board

- 1. Remove the tuner unit. (See section 6.8.)
- 2. Disconnect the couplers (D5, D20 and D25).
- 3. Disconnect the flexible cables (D3, D31, D32, D33 and D34).
- 4. Remove the screws (×4→) and remove the D-Board.

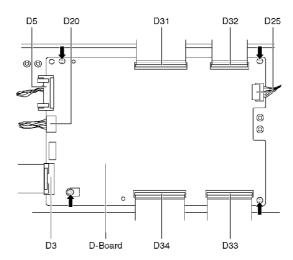


6.15. Remove the SU-Board

- 1. Remove the screws $(\times 3 \rightarrow)$.
- 2. Remove the flexible cables (SU1, SU2, SU3 and SU4) and remove the bridge connector (SU45).
- 3. Slide the SU-Board to the left to disconnect from a coupler (SC41-SU41) on the SC-Board and remove the SU-Board.

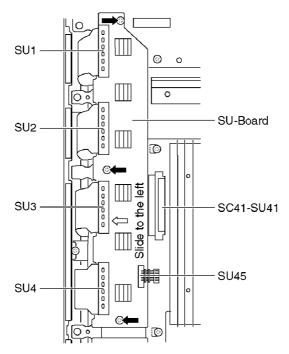


6.16. Remove the SD-Board

- 1. Remove the screws (×3→).
- 2. Remove the flexible cables (SD1, SD2, SD3 and SD4) and remove the bridge connector (SD46).
- 3. Slide the SD-Board to the left to disconnect from a coupler (SC42-SD42) on the SC-Board and remove the SD-Board.

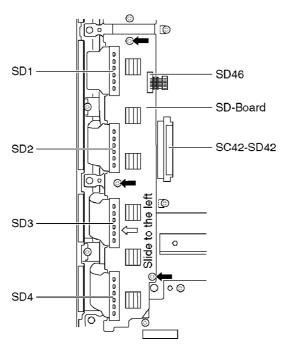


6.17. Remove the SC-Board

- 1. Unlock the cable clampers to free the cable.
- 2. Disconnect the couplers (SC2, SC20 and SC23).
- 3. Remove the screws (×9→) and remove the SC-Board.

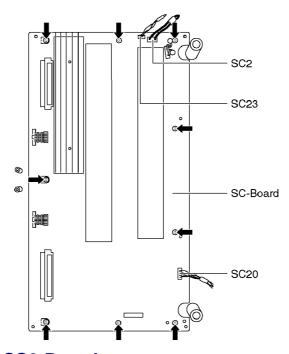

6.18. Remove the SS2-Board


- 1. Disconnect the coupler (SS23) and disconnect the flexible cable (SS55).
- 2. Remove the screws (×2→) and remove the SS2-Board.

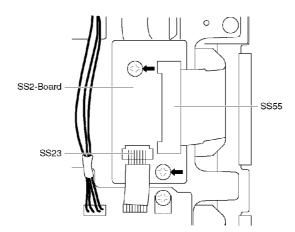

6.19. Remove the SS3-Board


1. Disconnect the coupler (SS22) and disconnect the flexible cable (SS56).

2. Remove the screws (×2→) and remove the SS3-Board.

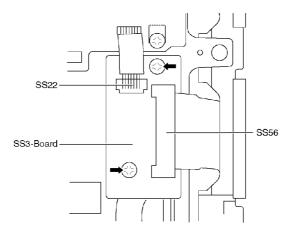


6.20. Remove the SS-Board

- 1. Remove the SS2-Board and SS3-Board. (See section 6.18. and 6.19)
- 2. Disconnect the couplers (SS11, SS12, SS33, SS43 and SS44).
- 3. Disconnect the flexible cables (SS51, SS52, SS53 and SS54).
- 4. Remove the screws (×7→) and remove the SS-Board.

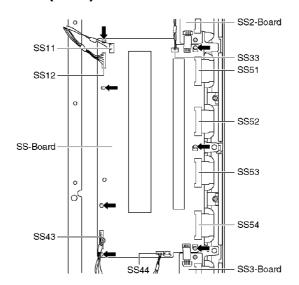


6.21. Remove the C1-Board

- 1. Remove the flexible cables holder fastening screws (×6⇒).
- 2. Disconnect the flexible cables (CA1, CA2 and CA3).
- 3. Disconnect the flexible cable (C10).
- 4. Remove the screws (×5→) and remove the C1-Board.

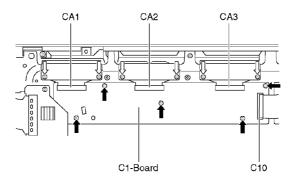


6.22. Remove the C2-Board

- 1. Remove the flexible cables holder fastening screws (×8⇒).
- 2. Disconnect the flexible cables (CA4, CA5, CA6 and CA7).
- 3. Disconnect the flexible cables (C20, C21 and C22).
- 4. Remove the screws (×5→) and remove the C2-Board.

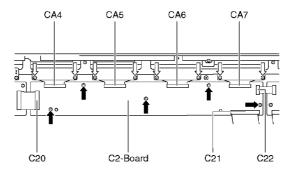


6.23. Remove the C3-Board

- 1. Remove the flexible cables holder fastening screws (×8⇒).
- 2. Disconnect the flexible cables (CA8, CA9, CA10 and CA11).
- 3. Disconnect the flexible cables (C31 and C32).
- 4. Disconnect the coupler (C33).
- 5. Remove the screws (×5→) and remove the C3-Board.

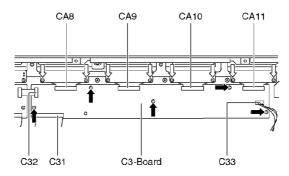


6.24. Remove the stand brackets

- 1. Remove the plasma panel section from the servicing stand and lay on a fiat surface such as a table (covered) with the plasma panel surface facing downward.
- 2. Remove the stand brackets (left, right) fastening screws (×6→ each) and remove the stand brackets (left, right).

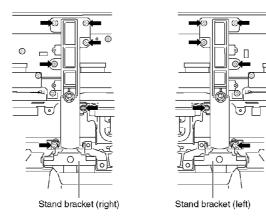


6.25. Remove the C4-Board

- 1. Remove the stand bracket (left). (See section 6.24.)
- 2. Remove the flexible cables holder fastening screws (×8⇒).
- 3. Disconnect the flexible cables (CB8, CB9, CB10 and CB11).
- 4. Disconnect the flexible cables (C41 and C42).
- 5. Disconnect the couplers (C43 and C44).
- 6. Remove the screws (×5→) and remove the C4-Board.

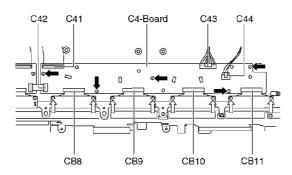


6.26. Remove the C5-Board

- 1. Remove the flexible cables holder fastening screws (×8⇒).
- 2. Disconnect the flexible cables (CB4, CB5, CB6 and CB7).
- 3. Disconnect the flexible cables (C50, C51 and C52).
- 4. Remove the screws (×5→) and remove the C5-Board.

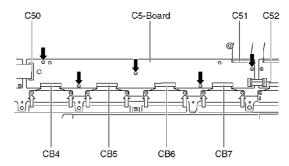


6.27. Remove the C6-Board

- 1. Remove the stand bracket (right). (See section 6.24.)
- 2. Remove the flexible cables holder fastening screws (×6⇒).
- 3. Disconnect the flexible cables (CB1, CB2 and CB3).
- 4. Disconnect the flexible cable (C60).
- 5. Remove the screws (×5→) and remove the C6-Board.

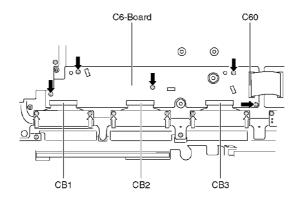


6.28. Remove the front bracket

- 1. Unlock the cable clampers to free the cable.
- 2. Disconnect the couplers (G1 and G51).
- 3. Remove the screws (×2→) and remove the front bracket.

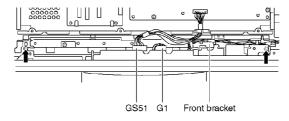


6.29. Remove the G-Board and GK-Board

- 1. Remove the front bracket. (See section 6.28.)
- 2. Remove the screws (×3→) and remove the front side metal frame.

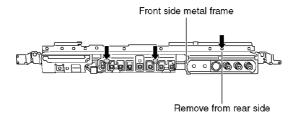


- 3. Remove the screws (×3→) and disconnect the couplers (G3-GK3).
- 4. Remove the G-Board and GK-Board.

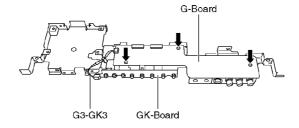


6.30. Remove the S-Board

- 1. Disconnect the coupler (S1).
- 2. Remove the screws (×2→) and remove the S-Board metal frame.
- 3. Remove the screws (×2⇒) and remove the S-Board.

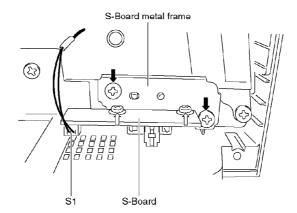


6.31. Remove the GS-Board and SD-Module


- 1. Remove the stand bracket R. (See section 6.24.)
- 2. Unlock the cable clampers to free the cable.
- 3. Disconnect the coupler (G52).
- 4. Remove the screws (×3→).
- 5. Remove the SD card unit.

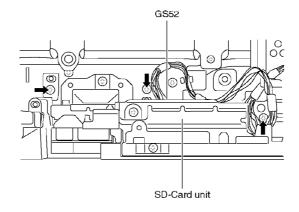

6. Remove the screws (×3→) and remove the SD card unit cover.

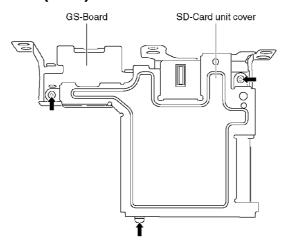


- 7. Disconnect the flexible cable (GS12).
- 8. Remove the screw (×1→).
- 9. Remove the GS-Board and SD-Module.

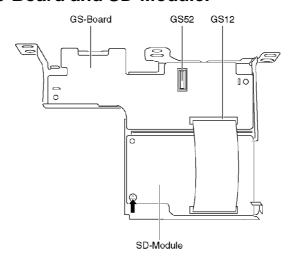


6.32. Remove the Plasma panel section from the Front frame (glass)

- 1. Remove the front frame and the plasma panel fastening screws (x 12→).
- 2. Remove the front frame and the stand brackets fastening screws (x 2⇒).

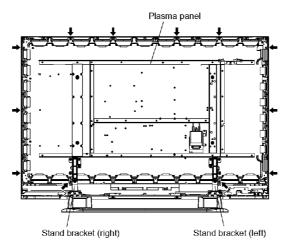


3. For leaving the plasma panel from the front frame, pull the bottom of the front frame forward, lift, and remove.

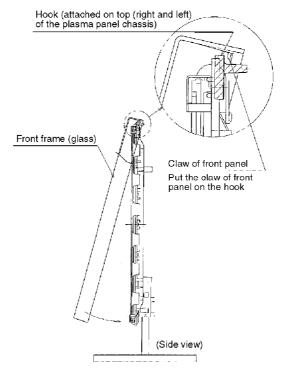


6.33. Remove the squawker speaker

- 1. Remove the front frame. (See section 6.32.)
- 2. Remove the screws (×12→).

3. Remove the glass holder R and L.

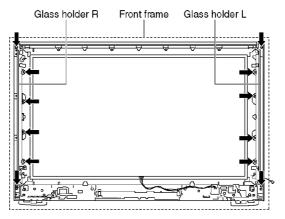

- 4. Remove the screws (×2→).
- 5. Remove the squawker speaker.

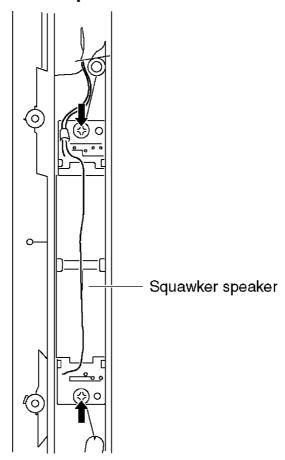


6.34. Remove the K-Board


- 1. Remove the front frame. (See section 6.32.)
- 2. Remove the glass holder R and L. (See section 6.33.)



- 3. Remove the screws (x3
- 4. Remove the bottom shield.
- 5. Remove the screws (×5⇒)
- 6. Remove the glass holder bottom R and L.
- 7. Remove the screws (×9→)
- 8. Remove the glass holder bottom.

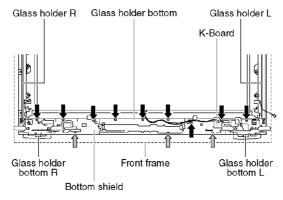

- 9. Remove the screws $(\times 2 \rightarrow)$.
- 10. Disconnect the couplers (K1).
- 11. Remove the K-board.

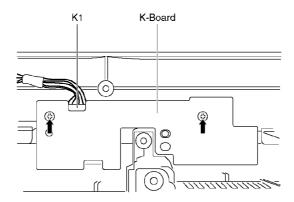

6.35. Replace the plasma panel (finished)


- 1. Place the new plasma panel (finished) on the flat surface of the table (covered by a soft cloth), with the plasma panel surface facing downward.
- 2. Attach the C1, C2, C3, C4, C5 and the C6-Board, connect the flexible cables (×22) from the Plasma panel to the C1, C2, C3, C4, C5 and the C6-Board, and fit the flexible cable holders.

- 3. Attach the Hooks (left, right) and fit the stand brackets (L, R) to the new plasma panel.
- 4. Place the plasma panel section on the servicing stand.
- 5. Attach the front frame and each P.C.Board and so on, to the new plasma panel.


7. Location of Lead Wiring

7.1. Lead of Wiring (1)

^{*} When fitting the front frame, be careful to allow any debris, dust or handling residue to remain between the front glass and plasma panel.

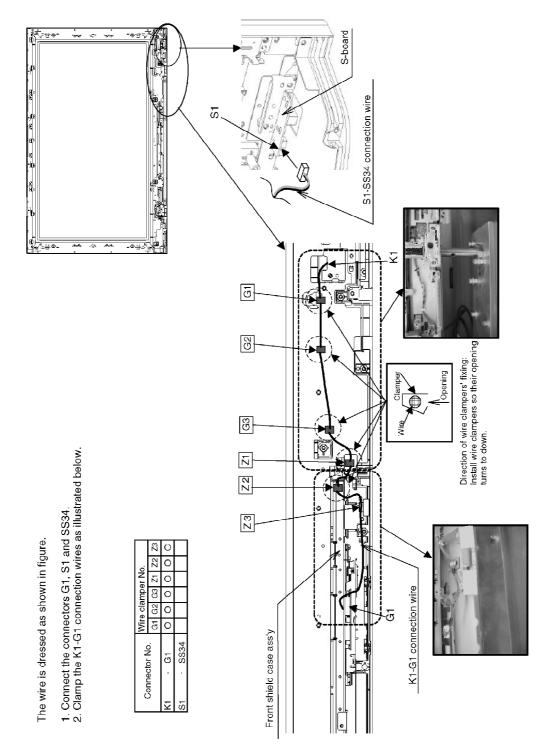


7.2. Lead of Wiring (2)-1

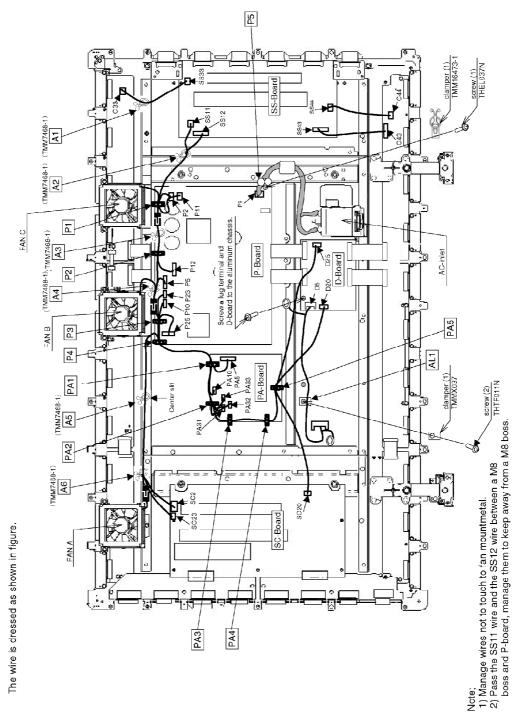

7.3. Lead of Wiring (2)-2

,	Wir	e cla	amp	er N	lo.														
Connector No.	P1	P2	РЗ	P4	P5	PA1	PA2	PA3	PA4	PA5	A 1	A2	АЗ	A4	A 5	A 6	AL1		
FAN A	- PA31				0		0	0								0	0		
FAN B	- PA32			О	0		О	0							0				
FAN C	- PA33	0	0	0	0		0	0						0	0				
P10	- PA10			0	0		0												
P5	- PA5			0	0		О								0				
P23	- SC23			0	0											0	О		
P2	- SC2		O	0	0									0	0	0	О		
SS11	- P11	0											0						
SS12	- P12		0										0	0					
D25	- P25			0	0		0	0	0	0	0								
AC-Inlet	- P9					О													
SS43	- C43																		
SS44	- C44																		
SS33	- C33											0							
D20	- SC20										0								
DG5 (Tuner ur	nit) - D5																	0	

7.4. Lead of Wiring (3)-1

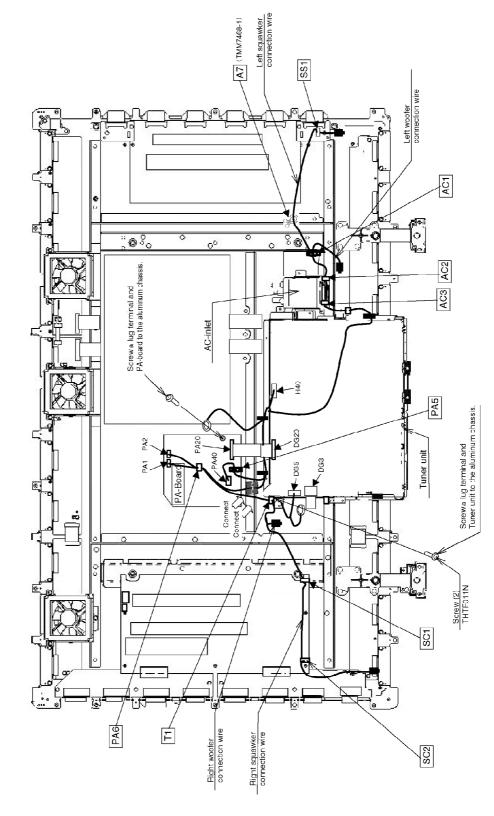


7.5. Lead of Wiring (3)-2


The wire is dressed as shown in figure.

L Connector No		Wir	Wire clamper No.										
		PA5	PA6	T1	SC1	SC2	AC1	AC2	AC3	A7	SS1		
R-Woofer connection wire	- PA1		O	0									
R-Squawker connection wire	- PA1		O	0	0	0							
L-Woofer connection wire	- PA2		0				0	0	0				
L-Squawker connection wire	- PA2		О				0	0	0	0	О		
H40 (Tuner unit)	- PA40	0											
DG20 (Tuner unit)	- PA20												
DG3 (Tuner unit)	- D3												
DG5 (Tuner unit)	_ D5												

7.6. Lead of Wiring (4)-1

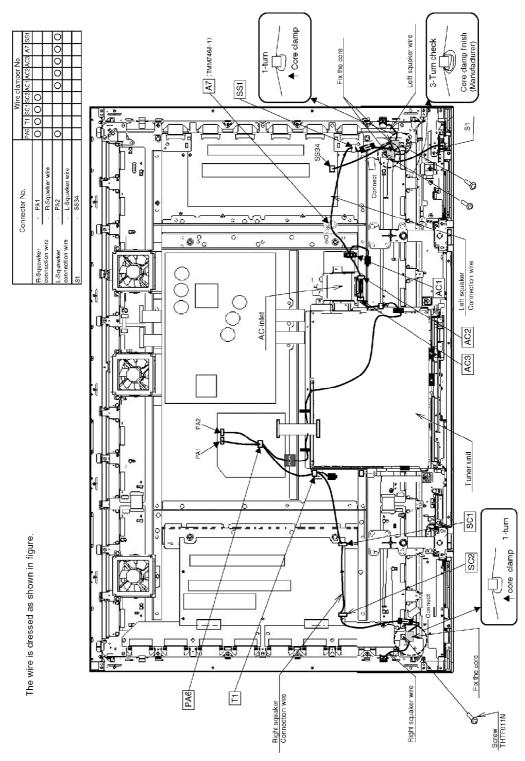


7.7. Lead of Wiring (4)-2

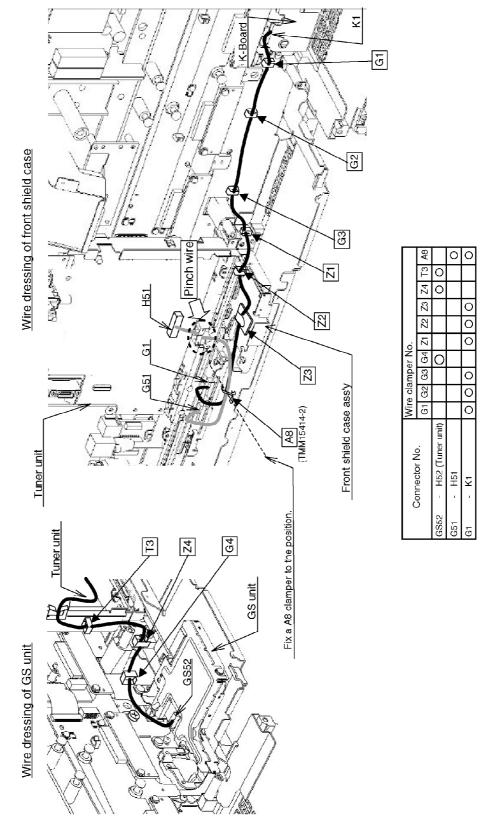


7.8. Lead of Wiring (5)

The wire is dressed as shown in figure.

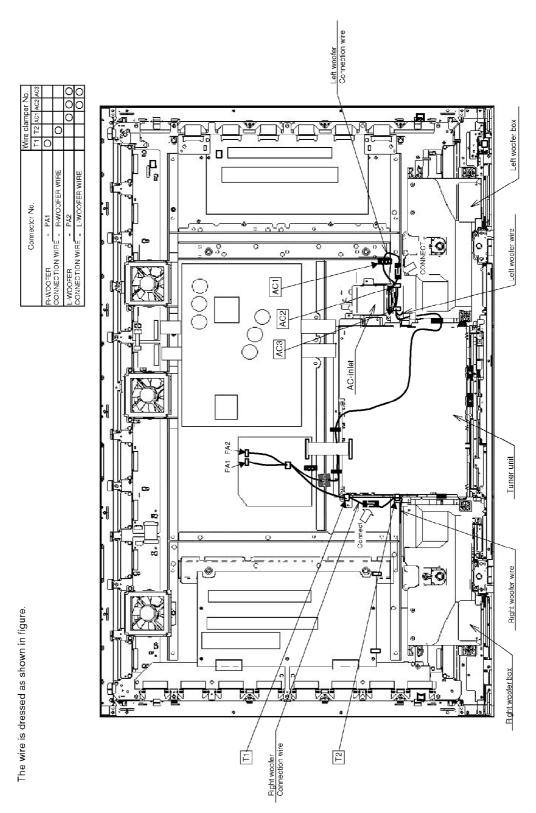

8. Self Check

1. Self-Check is used to automatically check the bus lines and hexadecimal code of the TV set.

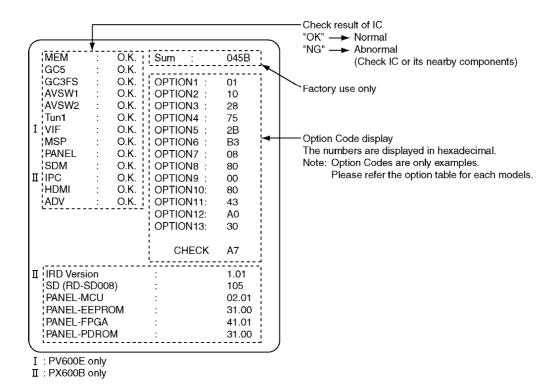

If the CCU ports have been checked and found to be incorrect or not located then "--" will appear in place of "O.K.".

Display	Ref.No.	Description	Board
MEM	IC1102	EEPROM	DG-Board
GC5	IC4037	GC5 Processor	DG-Board
GC3FS	IC4020	Global Core for Sub	DG-Board
AVSW1	IC3005	Video SW	H-Board
AVSW2	IC2105	Audio SW	H-Board
Tun1	TU001	Tuner	TA-Board
VIF	-	-	-
MSP	IC2106	Multi Sound Processor	H-Board
PANEL	IC9003	Convert Micon	D-Board
SDM	SD-Module	MPEG4/PHOTO View, SD recording	SD-Board
IPC	IC8013	PEAKS Lite	XV-Board
HDMI	IC4026	HDMI I/F Receiver	DG-Board
ADV	IC4019	10bit A/D	DG-Board

8.1. Power LED Blinking timing chart

1. Subject

Information of LED Flashing timing chart.

2. Contents

When an abnormality has occurred the unit, the protection circuit operates and reset to the stand by mode. At this time, the defective block can be identified by the number of blinkes of the Power LED on the front panel of the unit.

Blinking Times	Blinking timing	Contents	Check point
1	Once 3 sec — No Light — Light	No particalar check point	-
2		15V SOS	D-Board
3		3.3V SOS	D-Board
4		Power SOS	P-Board
5		5V SOS	D-Board
6		Driver SOS1 (SC Energy recovery circuit)	SU-Board SD-Board SC-Board
7		Driver SOS2 (SC floating voltage area)	SU-Board SD-Board SS-Board
8		Driver SOS3 (SS Energy recovery circuit)	SS-Board
9		Panel Status	-
10		PA SOS Tuner SOS	PA-Board H-Board
11		Fan SOS	Fan
12		Sound SOS	PA-Board


8.2. No Power

[First check point]


There are following 2 states of No Power indication by power LED.

1. No lit


2. Red is lit then turns red blinking a few seconds later. (See 8.1.)

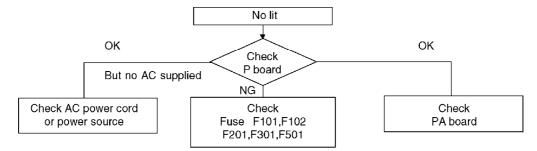

8.3. No Picture

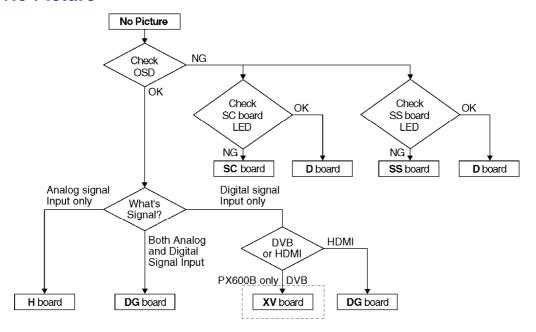


Drive circuits LED indicator

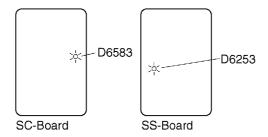

8.4. Local screen failure

Plasma display may have local area failure on the screen. <u>Fig-1</u> is the possible defect P.C.B. for each local area.

Fig-1

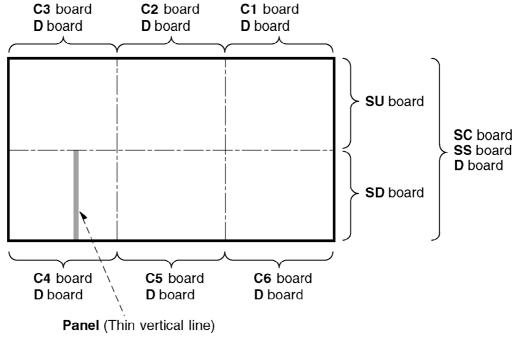

<Local screen failure chart>

9. Service Mode Function

MPU controls the functions switching for each IICs through IIC bus in this chassis. The following setting and adjustment can be adjusted by remote control in Service Mode.

9.1. How to enter SERVICE 1


- 1. In sound menu, set BASS to MAXIMUM, and set TREBLE to MINIMUM.

9.2. How to enter SERVICE 2

- 1. Set the channel to CH99.
- 2. Select the EQ 12kHz.
- 3. Press HOLD button on remote control.

Note:

To exit to Service mode, press EXIT or Power button on remote control.

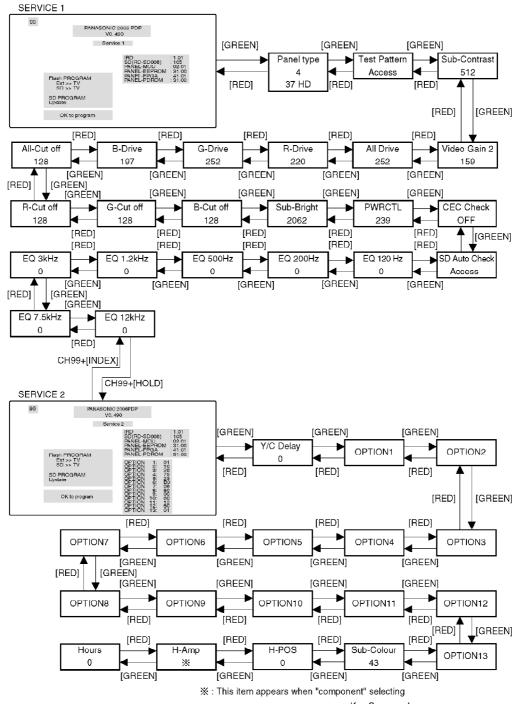

Key Command

-Press the RED/GREEN button to step up/down through the functions.
-Press the YELLOW/BLUE button to change the function values.
-Press the OK button after each adjustment has been mode to store the required values.

9.3. Option Description

		PV600E	PX600B		
option	.1	4F	01		
	b0			Colour austan	TAuto/4)
	b0	1	0	Colour system	Auto(1) SECAM(1)
	b2	1	0		NTSC(1)
	b3	1	0		M.NTSC(1)
	b4	0	0	A2 select 6.5MHz	5.742MHz(0) 6.742MHz(1)
	b5	0	0	SIF	I only(0), BG only(1)
	b6	1	0	OII	I/BG/DK/L(2), BG/DK(3)
	b7	0	0	free	
option		11	10	1100	
	<u>ь</u> о	1	0	A2 enable	enable(1)
	b1	0	0	Az enable	not use
	b2	0	0		not use
	b3	0	0		not use
	b4	1	1	NICAM enable	enable(1)
	b5	0	0	1410) IIVI CHADIC	not use
	b6	0	0		not use
	b7	0	0		not use
option		3A	28		j
		3A 0	28 0	CACO anabla	ICACO anable/1)
	b0			SASO enable	SASO enable(1)
	b1 b2	1	0	Fine tuning Search speed	Enable(1) Slow(1) Fast(0)
	b3	0 1	0	Search speed Tuner	MACO tuner (1), Others (0)
	b4	1	0	HYPER	UHF only (0), UHF/VHF (1)
	b5	1	1	IF I2C	I2C controlled Tuner IF module (1)
	b6	0	0	NICAM C4 bit	enable(1)
	b7	0	0	Blue Back	BLUE BACK on/off selection in menu(0)
option		D9		Dide Back	IBLUE BACK ON/ON Selection in menu(o)
			75	A LAUTO	I 1170
	b0	1	1	Aspect AUTO	enable(1)
	b1 b2	0	0	S1/S2 enable ID-1	enable(1)
	b3		1		enable(1) enable(1)
	b4	1	0	User aspect Just User aspect 14:9	enable(1)
	b5	0	1	ALBD 14:9	14:9 enable, Zoom3 disable at self wide(1)/ Zoom1, Zoom3 enable at self wide (0)
	b6	1	1	TEXT	lenable(1)
	b7	1	0	TEXT TOP	TOP enable (1)
option		2B	2B	TEXT TO	TOT enable (1)
				CI I Blankin n	IDlauking anakla (4)
	b0	1	1	CH Blanking	Blanking enable (1)
	b1	0	1	AV Blanking	Blanking enable (1)
	b2	_	0	Noise mute	Noise mute enable(0)
	b3 b4	0	0	sub picture	without sub-picture(0), with sub-picture(1) 2tuner(1),1tuner(0)
	b5	1		2tuner AV Input	3rotation(1) / 2rotation without front RCA (0)
	b6	0	0	Panel (LCD)	Samsung Panel(1)/SHARP Panel(0)
	b7	0	0	Large size (LCD)	32(1)/26(0) for LCD
				Largo Size (LOD)	JOSE TITE SOLO TOLE COD
option		AB	B3	00 11	L 31 OD 11 70
	b0	1	1	SD module	with SD module (1)
	b1	1	1	SD module Ext.Rec(PAL)	enable(1)
	b2	0	0	SD module Ext.Rec(NTSC)	enable(1)
	b3	1	0	SD module Ext.Rec(SECAM)	enable(1)
	b4	0	1	IDTV	enable(1)
	b5 b6	1	1	HDMI	enable(1) without HV input(0) / with HV input(1)
	b6 b7	0	0	Ext. HV input PC	
				rυ	enable(1)
option	_	00	08		
	b0	0	0	Asia	Asia(1),europe(0)
	b1	0	0	Australia	not use
	b2	0	0	Ireland/India	Ireland(1)
	b3	0	1	UK/Korea	UK(1)
	lb4 l	0	0	Lang1	Inot use
	b5	0	0	Lang2	not use
					not use not use not use

i		PV600E	PX600B		
option	<u>, a</u>	78	80	Euro option	
	ЬО	0	0	ACI all country	ACI enable(1), only Netherlands(0)
	b1	0	0	ACI auto MP	ACI enable(1), only Netherlands(0) ACI auto multi package enable (1)
	b2	0	0	ACI offset	ACI auto multi package enable (1) ACI offset for VCR prog. enable(1)
	b3	1	0	Power up EC-Mode	Power on EC enable (1)
	b4	1	0	AVLink	Q-Link off selectable in menu (1)
	b5	1	0	Volume correction	TV Volume coorrection enable (1)
	b6	1	0	MPX/NICAM display	Display NICAM (0), Display MPX (1)
	b7	0	1	Albd Reset Off	enable(1)
option	19	00	00		onabo(1)
	ьо	0	0	CH Plan	ASIA / M.E. / HK/UK / CHINA(1)
	b1	0	0	OTT ICIT	NZ/INDNES(1)
	b2	0	0		AUSTRALIA(1)
	b3	0	0		E.EUROPE(1)
	b4	0	0		SPECIAL(1)
	b5	0	0		AMERICÀ(1)
	b6	0	0		CATV(1)
	b7	0	0		JAPAN(1)
option	110	80	80		
	bo	0	0	NICAM priority	ASIA/M.E.(1)
	b1	0	0		HK/UK(1)
	b2	0	0		CHINA(1)
	b3	0	0		NZ/INDN(1)
	b4	0	0		AUSTRA(1)
	b5	0	0		E.EURO(1)
	b6	0	0		SPECIAL(1)
	b7	1	1	HDMI AVI Aspect	enable(1)
option		43	43	Additional	
	b0	1	1	Remocon Type	Delux(1) / Leader(0)
	b1	1	1	Environment AI (PDP)	enable, with viewing mode auto (1) / disable, without viewing mode auto(0)
	b2	0	0	WSS14:9 off	WSS 14:9 off (1)
	b3	0	0	Child lock	Child Lock on:Tuning Menu skip(1)
	b4	0	0		11.73
	b5	0	0	Contrast Al	enable(1)
	b6 b7	0	0	Service H-POS Service V-VOS	enable(1) enable(1)
		20			lenable(1)
option	b0	20	A0 0	Additional last memory of aspect	each source(1) / ALL source(0)
	b1	0	0	Reserved	Each Source(1) / MEL Source(0)
	b2	0	0	TEXT Ch Refresh	refresh enable(1) / disenable(0)
	b3	0	0	STILL	1:Disable / 0:Enable
	b4	0	0	LATIN	Latin:SAP/Fixed SIF4.5MHz/PAL-M.N/CC/Black level/Language
	b5	1	1	SRS	enable(1)
	b6	0	0	HDMI Quali TV	enable(0)
1				HDMI EC function	enable(1)
	b7	0	1		
		0 20	30	Additional	
option		_		Additional DVB ALBD	enable(1)
option	113	20	30	DVB ALBD HDMI port	enable(0) 2 ports model/(1)1port model (only for TV MCU port setting)
option	113 bo	20 0	30 0	DVB ALBD HDMI port HDMI format error OSD	enable(0) 2 ports model/(1)1port model (only for TV MCU port setting) display(0)/not display(1)
option	113 b0 b1 b2 b3	20 0 0	30 0 0	DVB ALBD HDMI port HDMI format error OSD CEC control	enable(0) 2 ports model/(1)1port model (only for TV MCU port setting) display(0)/not display(1) enable(0)
option	b0 b1 b2 b3 b4	20 0 0	30 0 0	DVB ALBD HDMI port HDMI format error OSD CEC control Aspect 4:3 FULL	enable(0) 2 ports model/(1)1port model (only for TV MCU port setting) display(0)/not display(1) enable(0) enable(0)
option	13 b0 b1 b2 b3 b4 b5	20 0 0 0 0 0	30 0 0 0	DVB ALBD HDMI port HDMI format error OSD CEC control	enable(0) 2 ports model/(1)1port model (only for TV MCU port setting) display(0)/not display(1) enable(0)
option	b0 b1 b2 b3 b4	20 0 0 0 0	30 0 0 0 0 0	DVB ALBD HDMI port HDMI format error OSD CEC control Aspect 4:3 FULL	enable(0) 2 ports model/(1)1port model (only for TV MCU port setting) display(0)/not display(1) enable(0) enable(0)

10. Adjustment Procedure

10.1. Driver Set-up

10.1.1. Item / Preparation

1. Input a white signal to plasma video input.

2. Set the picture controls as follows.

Picture menu: Dynamic

P-NR: OFF Aspect: 16:9

Caution

- 1. First perform Vsus adjustment.
- 2. Confirmation of Vscn voltage should be performed after confirmation of Vad adjustment.

When Vad=-105V, Voltage of Vscn is 35V ±3V.


10.1.2. Adjustments

Adjust driver section voltages referring the panel data on the panel data label. Check or adjust the following voltages with the multimeter.

Name	Test Point	Voltage	Volume	Remarks
Vsus	TPVSUS (SS)	Vsus ± 2V	VR251 (P)	*
Ve	TPVE (SS)	Ve ± 2V	VR6000 (SS)	*
Vset	TPVSET (SC)	280V ± 7V	Fixed	
Vad	TPVAD (SC)	-105V ± 1V	VR6600 (SC)	
Vscn	TPVSCN (SC)	Vad+140V ± 4V	Fixed	
Vda	TPVDA (SS)	75V ± 1V	Fixed	

^{*}See the Panel label.

Panel Label information

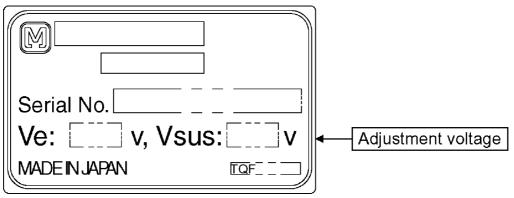

10.2. Initialization Pulse Adjust

- 1. Input the White signal to plasma video input.
- 2. Set the picture controls as follows.


Picture menu : Dynamic

P-NR : OFF Aspect : 16:9

3. Connect Oscilloscope to TPSC1 (T2) and adjust VR6602 for 195+10

μ Sec.

	Test point	Volume	Level
T2	TPSC1 (SC)	VR6602 (SC)	195 ± 10 µ Sec

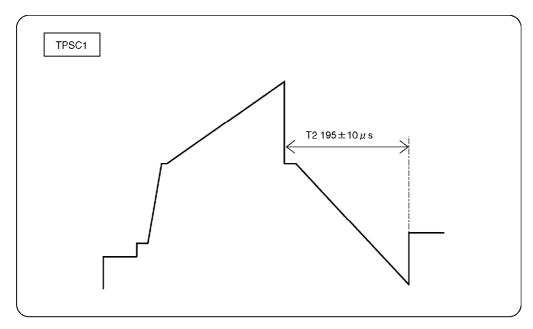

10.3. P.C.B. (Printed Circuit Board) exchange

10.3.1. Caution

1. To remove P.C.B., wait 1 minute after power was off for discharge from electrolysis capacitors.

10.3.2. Quick adjustment after P.C.B. exchange

Adjust the following voltages with the multimeter.


P.C.B.	Name	Test Point	Voltage	Volume	Remarks		
P Board	Vsus	TPVSUS (SS)	Vsus ± 2V	VR251 (P)	*		
SC Board	Vad	TPVAD (SC)	-105V ± 1V	VR6600 (SC)			
SS Board	Ve	TPVE (SS)	Ve ± 2V	VR6000 (SS)	*		
D, DG Board	White blance a	White blance and Sub brightness for NTSC, PAL, HD, PC and 625i signals					

^{*}See the Panel label.


Caution:

Absolutely do not reduce Vsus below Ve not to damage the P.C.B.

10.4. Adjustment Volume Location

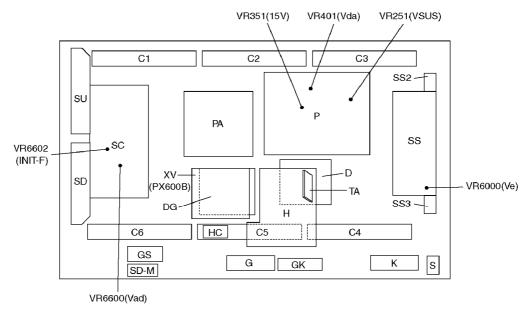

10.5. Test Point Location

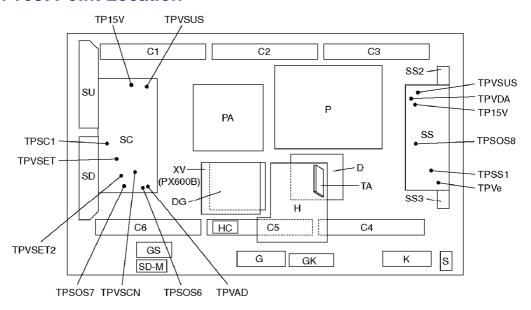

11. Adjustment

11.1. PAL panel white balance adjustment

Instrument Name	Connection	Remarks
-W/B pattern	RF input	User setting: Normal
-Color analyzer (Minolta CA-100 or equivalent)	Panel surface	
Procedu	Remarks	

Instrum	ent Name	Co	nnection	Remarks	
-Asing time is longer than	Picture menu : Dynamic				
-Make sure the front panel	Make sure the front panel to be used on the final set is fitted.				
Make sure a color signal is	s not being shown befo	re adjustment.			
-Put the color analyzer whe Complete the adjustment w Turn on the power supply a	vithin 10 minutes after t	he turn on electricity.	ging etc.		
1. Display the white balance 2. Check that the color bala 3. Enter the <service1> mo 4. Select "G-CUTOFF" item key "Yellow" or "Blue". Also, "B-CUTOFF" and "R-</service1>	ance is "cool". de. , using the color-key "R	led" or "Green", and set	to "128", using the color-	-Highlight section Signal amplitude 75%	
 Set "G-DRIVE" at "208". Touch the signal receive and R drive so x, y become 	the "Color balance Co		nter, and adjust B drive	White Balan	
7. Set "ALL-DRIVE" to "252 8. Set colorbalance to "Nor	· · · ·			Pattern	
9. Fix G cutoff , B cutoff an				Tattem	
10. Fix G drive at "208". 11. Adjust B drive and R dri	ive so the highlight win	dow's x v hecome the "i	Color balance "Normal"		
in the below table.	ive so the inglingin will	dow 3 x, y become the	Solor Balance Horman		
12. Set "ALL-DRIVE" to "25 13. Set color balance to "W					
14. Set G cutoff, B cutoff ar					
15. Set G drive to "208".		-l	O-l b-l 18/"		
16. Adjust B drive and R dri shown in the below table.	ive so the nighlight win	dow's x, y become the "	Color balance warm	7 1	
17. Set "ALL-DRIVE" to "25	2".				
				/ /	
				High ligh	
Table 1. Color b	alance target v	⁄alue	-	/	
ColorTemperature	Χ	у		└─ Low light 15	
Cool	0.276	0.276			
Normal	0.288	0.296			
Warm	0.313	0.329			
T-1-1- 0 O-4 -#		- (DAL)			
Table 2, Cut-off		· · · · ·			
Color Balance	<u>R</u>	G 40.0407	В		
Cool	A0-0136	A0-0137	A0-0138		
Normal	A0-013c	A0-013d	A0-013e		
Warm	A0-0142	A0-0143	A0-0144		
Table 3, Drive d	ata addresses	·			
Color Balance	R	G	В		
Cool	A0-0139	A0-013a	A0-013b		

11.2. HD white balance adjustment

A0-013f

A0-0145

Normal

Warm

A0-0140

A0-0146

A0-0141

A0-0147

Instrument Name	Connection	Remarks
-1080i W/B Pattern	-RF input	User setting: Normal
-Color analyzer(Minolta CA-100 or equivalent)	-Panel surface	
Procedure	Remarks	

Instrum	ent Name	Co	onnection	Remarks
-Asing time is longer than	15min.			Picture menu: Dynamic
-Make sure the front panel	ASPECT:16:9			
-Make sure a color signal is				
-Put the color analyzer whe	ere there is little colour va	riation.		
Complete the adjust Turn on the power s			•	
oy aging etc.	supply again when	it is not possibl	le to complete it	
Display the white balance Check that the color bala Enter the <service1> mo</service1>	ance is "cool".			-Highlight section Signal amplitude 75%
4. Select "G-CUTOFF" item key "Yellow" or "Blue".		d" or "Green", and set	to "128", using the color-	1080i
Also, "B-CUTOFF" and "R- 5. Set "G-DRIVE" at "208".	CUTOFF" set to "128".			White Baland
Touch the signal receive and R drive so x, y become	-		nter, and adjust B drive	Pattern
7. Set "ALL-DRIVE" to "252 8. Set colorbalance to "Nor				
9. Fix G cutoff , B cutoff and 10. Fix G drive at "208".	d R cutoff at "128".			
10. Fix G drive at 208. 11. Adjust B drive and R dri	ive so the highlight windo	ow's x, y become the "	Color balance "Normal"	
in the below table. 12. Set "ALL-DRIVE" to "25	:0"			
13. Set color balance to "W				
14. Set G cutoff, B cutoff ar 15. Set G drive to "208".	nd R cutoff to "128".			1 1
16. Adjust B drive and R dri	ive so the highlight windo	ow's x, y become the "	Color balance Warm"	
shown in the below table. 17. Set "ALL-DRIVE" to "25	32 "			
000 7.22 5.072 10 20				/ High light
				/
Table 1. Color ba	alance target va	alue		Low light 15
Color Temperature	х	У	1	
Cool	0.276	0.276	1	* The Color balance COOL
Normal	0.288	0.296	1	from Japanese model valu
Warm	0.313	0.329]	
Table 2, Cut-off	data addresses	(HD)		
Color Balance	R	G	В	
Cool	A0-0124	A0-0125	A0-0126	
Normal	A0-012a	A0-012b	A0-012c	
Warm	A0-0130	A0-0131	A0-0132	
Table 3, Drive d	ata addresses (HD)		
Color Balance	R	G	В	
Cool	A0-0127	A0-0128	A0-0129	

A0-012e

A0-0134

A0-012f

A0-0135

Normal

Warm

A0-012d

A0-0133

11.3. Sub bright adjustment


Instrument Name	Connection	Remarks	
1. PAL signal generator (or RF)	Connect to the input termina	User setting: Normal	
Procedu	Remarks		
-Color balance adjustment is finished for each signal.	Picture menu: Dynamic		
-Do adjustments in a dark room.	Color balance: Normal		
-Complete the adjustment within 10 minutes after the	ASPECT: 16:9		
Turn on the power supply again when it is not possib	Turn on the power supply again when it is not possible to complete it by aging etc.		

- 1. Display the 10 step gray-scale pattern for adjusting subbright from video input.
- 2. Use "Sub-Bright" in the <Sevice1> mode to adjust so the 6th section shows up and the 7th fades away.

Data

Sub-Bright data address

	Address
Sub-Bright (upper)	A0-0116
Sub-Bright (lower)	A0-0117

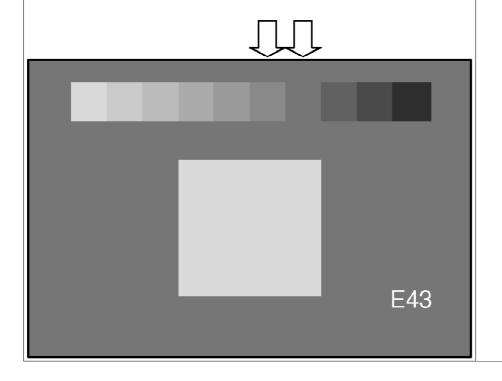

11.4. ABL adjustment

Instrument Name	Connection	Remarks
HD signal emitter (or Leader : 1080i/No.9 signal) Wattmeter	COMPONENT input terminal Connect the AC power of the set to the wattmeter.	
Procedu	re	Remarks
-Make sure the set is aged for 30 minutes or more befor (Do not switch off during or after aging.) -Voltage 230V 50Hz (variation within 1%) -Volume at minimum and screen size at "16:9" Component input, dynamic, standard	ore adjustment.	
1. Connect the set's AC power to the wattmeter. 2. Input the signal (top half: color bar, Bottom half :Ho 3. Select the "PWRCTL" item in the <service1> mode. 4. Adjust PWRCTL so the set's power consumption is TH-50PV600E 438 ±10W TH-50PX600B 447 ±10W</service1>	rizontal 10steps bar).	
Remarks 1. The initial data are Data address: A0-0102 Default data: 0x00 2. The power and data are in reverse relationship. (Lower the data to raise the power.)		
-Raising direction (↑): 0 → 255, 254, 253 -Lowering direction (↓): 0 → 1, 2, 3 3. There is a possibility that the adjustment value can value of PWRCTL is large.	do two places, adjust it in that case, that the	
	9 Signal o half: Full color bar tom half: Horizontal 10 steps bar	

11.5. Sub-Contrast adjustment

Name of measuring instrument	Connection	Remarks
RF generator		
Base Band generator		
Preparation (AV	/)	Remarks
1. Receive AV1 (PAL 100% Full White or Split Colour bar sho	-	
100% White		
2. Goes into service mode, choose Sub-Contrast, and it che	cks that data value is 512.	
(It checks that an initial value is a default)		
Adjustment of AV sy		Remarks
The colour key yellow button of remote control is pushed	I.	
2. The OSD character of sub-contrast becomes red.		
(Inside under automatic adjustment) 3. The OSD character of sub-contrast returns to white.		
4. End.		
Preparation (RF	=)	Remarks
1. Receive RF (PAL 100% Full White or Split Colour bar show		
100% Winite		
2. Goes into service mode, choose Sub-Contrast, and it che	cks that data value is 512.	
(It checks that an initial value is a default)		
Adjustment of RF sy		Remarks
1. The colour key yellow button of remote control is pushed	·	
2. The OSD character of sub-contrast becomes red. (Inside under automatic adjustment)		
3. The OSD character of sub-contrast returns to white.		
4. End.		
Preparation (HD	0)	Remarks
1. Receive Component		
(1080i/ 60Hz or 1080i/ 50Hz, 100% Full White or Split colour by 100% White	bar as shown below.)	
2. Goes into service mode, choose Sub-Contrast, and it che	ecks that data value is 384.	
(It checks that an initial value is a default)		
Adjustment of HD system		Remarks
The colour key yellow button of remote control is pushed	ı.	
2. The OSD character of sub-contrast becomes red.		
(Inside under automatic adjustment)		
3. The OSD character of sub-contrast returns to white.	I I	

11.6. Multi-Window adjustment

Name of measuring instrument	Connection	Remarks
Base Band generator		
Condition		Remarks
Sub contrast adjustment is finished.		
Preparation		
1. Come out of market mode and input AV1 PAL 100% full v	white.	
2. Go into service mode, choose VIDEO Gain2, and check to	hat data is 255.	
(Check that initial value is the default)		
Adjustment		Remarks
1. Check the brightness of main screen and sub screen by	watching.	
2. Go to procedure 3 when the brightness of sub screen is	higher than that of main screen.	
Oppositely, do not adjust and end when the brightness of sub screen is lower than that of main screen.		
3. Adjust VIDEO Gain2 so that the borderline of main and s watching.	sub screen may become unremarkable by	
The EEPROM address to adjustment data. VIDEO GAIN2: A0-01b1		Press OK button.


12. Hotel mode

1. Purpose

Restrict a function for hotels.

2. Access command

- Enter to the Service 2 Mode.
- Press Information button on remote control and entry to the EAROM EDITOR Mode.
- Press the RED/GREEN button to step up/down through the address.
- Press the YELLOW/BLUE button to step left/right through the address.
- Press the PROGRAMME UP/DOWN button to step up/down through the page.
- Press the VOLUME UP/DOWN button to change the function values.
- Set the data of EEPROM(ADDRESS 0BAF) to 01.
- Press the OK button to memorize the data.

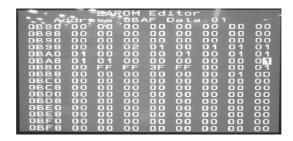

Push the Power switch(button) off/on the set(the remote control) to turn the set off/on.


It can be made Hotel mode.

3. Exit command

- First, set the data of EEPROM(ADDRESS 0BAF) to 00. Next, Push the Power switch(button) off/on the set(the remote control) to turn the set off/on.

Then, it is no longer hotel mode.

- 4. Access command to the Hotel mode setup menu
 - Prerequisite: It is conditions that the data of EEPROM(ADDRESS 0BAF) is 01.
 In order to display the Hotel mode setup menu, please enter the following command (within 2 second).
 [[TV]:down + [REMOTE]:TV/AV(3 times)]
 Then, the Hotel mode setup menu is displayed.

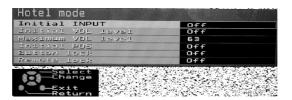

5. Explain the Hotel mode setup menu

item	Function
Initial INPUT	Select input signal modes.
	Set the input, when each time power
	is switched on.
	Selection :
	Off/TV/AV1/AV2/AV2S/AV3/Av3S/AV4/
	Av4S/Component/PC/HDMI1/HDMI2
	-Off: give priority to a last memory. However, Euro model is compulsorily set to TV.
	-AVnS/AVnC: only Euro model selectable
	-PC: selectable with VGA option
Initial VOL	Adjust the volume when each time
level	power is switched on.
	Selection/Range :
	Off/0 to 63
	-Off: give priority to a last memory
Maximum	Adjust maximum volume.
VOL level	Range:
	0 to 63
Initial POS	Select programme number.
	Selection:
	Off/0 to 99
	-Off: give priority to a last memory
Button lock	Select local key conditions.
	Selection:
	Off/SETUP/MENU/AII
	-Off: altogether valid
	-SETUP: only F-key is invalid
	(Tuning guide(menu) can not be selected.)
	-MENU: only F-key is invalid (only Volume/Mute can be selected.)
	-All: altogether invalid.
Remote lock	Select remote control key conditions.
	Selection:
	Off/SETUP/MENU
	-Off: altogether valid
	-SETUP: only Setup menu is invalid
	-MENU: Picture/Sound/Setup menu are invalid

6. To exit the Hotel mode Disconnect AC power cord from wall outlet

13. Conductor Views

13.1. P-Board

- **13.2. PA-Board**
- 13.3. H-Board
- 13.4. G and TA-Board
- 13.5. GK, HC, K and S-Board
- 13.6. **GS-Board**
- **13.7. DG-Board**
- 13.8. XV-Board (PX600B)
- 13.9. **D-Board**
- 13.10. C1-Board
- 13.11. C2-Board
- 13.12. C3-Board
- 13.13. C4-Board
- 13.14. C5-Board
- 13.15. C6-Board
- 13.16. SC-Board
- 13.17. SU-Board
- 13.18. SD-Board
- 13.19. SS-Board
- 13.20. SS2 and SS3-Board

14. Schematic and Block Diagram

14.1. Schematic Diagram Notes

Important Safety Notice

Components identified by \triangle mark have special characteristics important for safety. When replacing any of these components, use only manufacture's specified parts.

- Notes:

 1. Resisto
 1. Resisto
 2. Capacition:
 Chair of resistance is OHM [0] (K=1,000, M=1,000,000).
 Capacition:
 Unit of capacitance is µF, unless otherwise noted.
 3. Coil
 Unit of Inductance is H. unless otherwise noted.
 4. Test Point

 ↓: Test Point

 ↓: Line Earth (Hot)

 6. Voltage Measurement
 Voltage is measured by DC voltmeter
 Concelibor—Power Source
 Reserving Signal
 All Lussborner's controls

 AC220,240V, 50/60Hz

 Power Source
 Reserving Signal
 All Lussborner's controls

 AMaximum positions
 7. When arrow mark (✓) is found, connection is easily found from the direction of anow.

- Indicates the major signal flow, : Video
 Audio >
 This schematic diagram is the latest at the time of printing and subject to change without

TH-50PV600E, TH-50PX600B Schematic Diagram Notes

- inarks:

 The Power Circuit contains a circuit area which uses a separate power supply to isolate the earth connection.

 The circuit is defined by HOT and COLD indications in the schematic diagram. Take the following precautions.

 All circuits, except the Power Circuit, are cold.

 Precautions

 a. Do not touch the hot part or the hot and cold parts at the same time or you may be shocked.
- - a. Do not fouch the hot part or the hot and coop period as the secretic cooperation.
 be shocked.
 b. Do not short-circuit the hot and cold circuits or a fuse may blow and parts may break.
 c. Do not connect an instrument, such as an oscilloscope, to the hot and cold circuits simultaneously or a fuse may blow.
 Connect the earth of instruments to the earth connection of the circuit being measured.
 d. Make sure to disconnect the power plug before removing the chassis.

TH-50PV600E, TH-50PX600B Schematic Diagram Notes

- 14.2. Main Block Diagram
- 14.3. P-Board Block Diagram
- 14.4. P-Board (1 of 2) Schematic Diagram
- 14.5. P-Board (2 of 2) Schematic Diagram
- 14.6. PA-Board Block Diagram


- 14.7. PA-Board (1 of 3) Schematic Diagram
- 14.8. PA-Board (2 of 3) Schematic Diagram
- 14.9. PA-Board (3 of 3) Schematic Diagram
- 14.10. H and TA-Board Block Diagram
- 14.11. G, GK, GS, HC and K-Board Block Diagram
- 14.12. H-Board (1 of 3)Schematic Diagram
- 14.13. H-Board (2 of 3)Schematic Diagram
- 14.14. H-Board (3 of 3)Schematic Diagram
- 14.15. G-Board Schematic Diagram
- 14.16. GS-Board Schematic Diagram
- 14.17. GK, K, HC and TA-Board Schematic Diagram
- 14.18. DG-Board (1 of 3) Block Diagram
- 14.19. DG-Board (2 of 3) Block Diagram
- 14.20. DG-Board (3 of 3) Block Diagram
- 14.21. DG-Board (1 of 8) Schematic Diagram
- 14.22. DG-Board (2 of 8) Schematic Diagram
- 14.23. DG-Board (3 of 8) Schematic Diagram
- 14.24. DG-Board (4 of 8) Schematic Diagram
- 14.25. DG-Board (5 of 8) Schematic Diagram
- 14.26. DG-Board (6 of 8) Schematic Diagram
- 14.27. DG-Board (7 of 8) Schematic Diagram
- 14.28. DG-Board (8 of 8) Schematic Diagram
- 14.29. XV-Board Block Diagram (PX600B)
- 14.30. XV-Board (1 of 5) Schematic Diagram (PX600B)
- 14.31. XV-Board (2 of 5) Schematic Diagram (PX600B)

- 14.32. XV-Board (3 of 5) Schematic Diagram (PX600B)
- 14.33. XV-Board (4 of 5) Schematic Diagram (PX600B)
- 14.34. XV-Board (5 of 5) Schematic Diagram (PX600B)
- 14.35. D-Board (1 of 2) Block Diagram
- 14.36. D-Board (2 of 2) Block Diagram
- 14.37. D-Board (1 of 8) Schematic Diagram
- 14.38. D-Board (2 of 8) Schematic Diagram
- 14.39. D-Board (3 of 8) Schematic Diagram
- 14.40. D-Board (4 of 8) Schematic Diagram
- 14.41. D-Board (5 of 8) Schematic Diagram
- 14.42. D-Board (6 of 8) Schematic Diagram
- 14.43. D-Board (7 of 8) Schematic Diagram
- 14.44. D-Board (7 of 8) Schematic Diagram
- 14.45. C1, C2, C5 and C6-Board Block Diagram
- 14.46. C3, C4, SS, S, SS2 and SS3-Board Block Diagram
- 14.47. C1-Board (1 of 2) Schematic Diagram
- 14.48. C1-Board (2 of 2) Schematic Diagram
- 14.49. C2-Board (1 of 3) Schematic Diagram
- 14.50. C2-Board (2 of 3) Schematic Diagram
- 14.51. C2-Board (3 of 3) Schematic Diagram
- 14.52. C3-Board (1 of 2) Schematic Diagram
- 14.53. C3-Board (2 of 2) Schematic Diagram
- 14.54. C4-Board (1 of 2) Schematic Diagram
- 14.55. C4-Board (2 of 2) Schematic Diagram
- 14.56. C5-Board (1 of 3) Schematic Diagram


- 14.57. C5-Board (2 of 3) Schematic Diagram
- 14.58. C5-Board (3 of 3) Schematic Diagram
- 14.59. C6-Board (1 of 2) Schematic Diagram
- 14.60. C6-Board (2 of 2) Schematic Diagram
- 14.61. SS, S, SS2 and SS3-Board Schematic Diagram
- 14.62. SC, SU and SD-Board Block Diagram
- 14.63. SC-Board (1 of 2) Schematic Diagram
- 14.64. SC-Board (2 of 2) Schematic Diagram
- 14.65. SU-Board (1 of 2) Schematic Diagram
- 14.66. SU-Board (2 of 2) Schematic Diagram
- 14.67. SD-Board (1 of 2) Schematic Diagram
- 14.68. SD-Board (2 of 2) Schematic Diagram


15. Parts Location & Mechanical Replacement Parts List

15.1. Parts Location

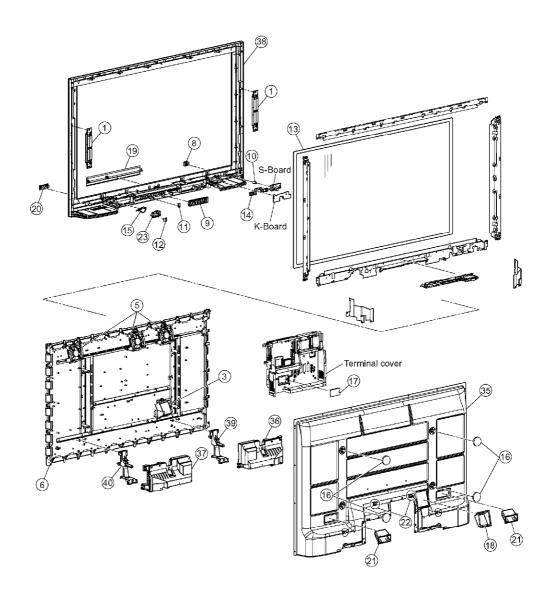



15.2. Packing Exploded Views (1)

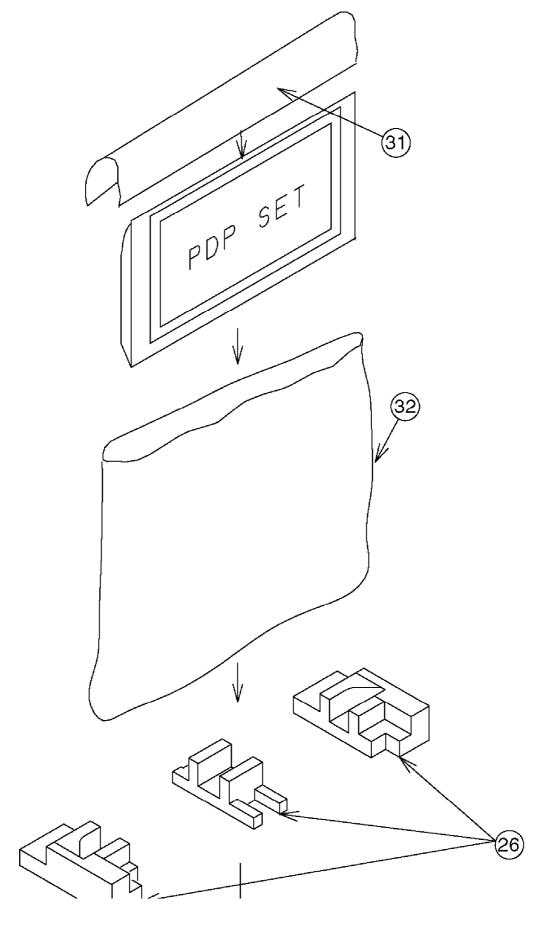

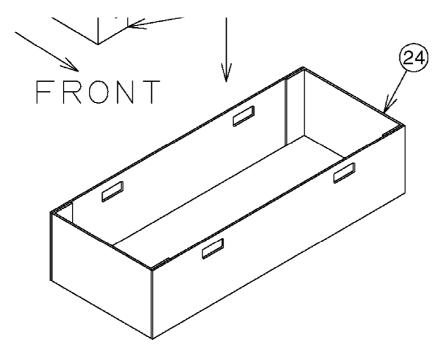


15.3. Packing Exploded Views (2)

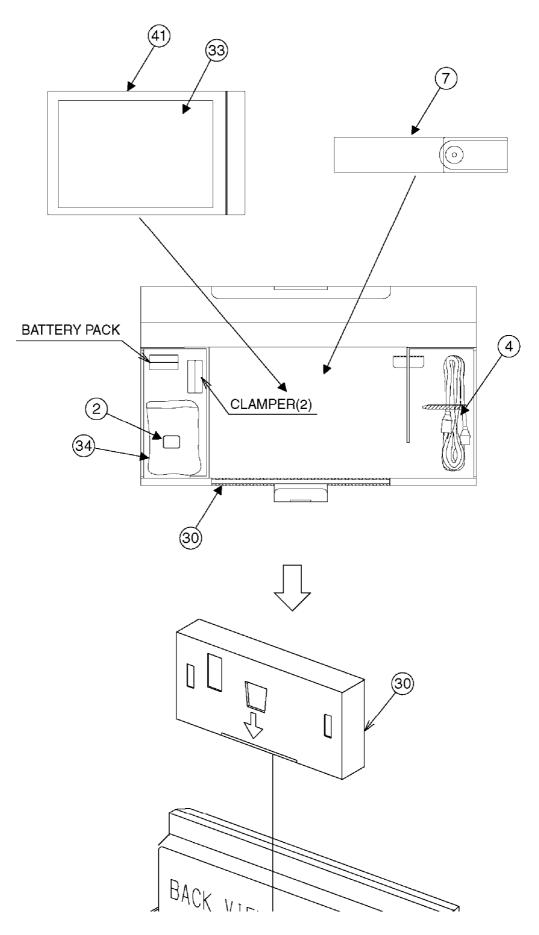

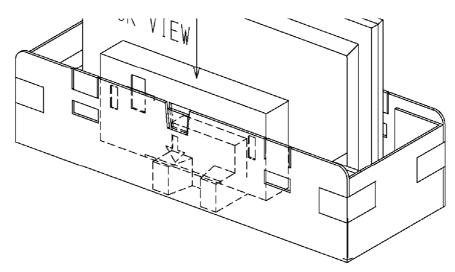

15.4. Packing Exploded Views (3)

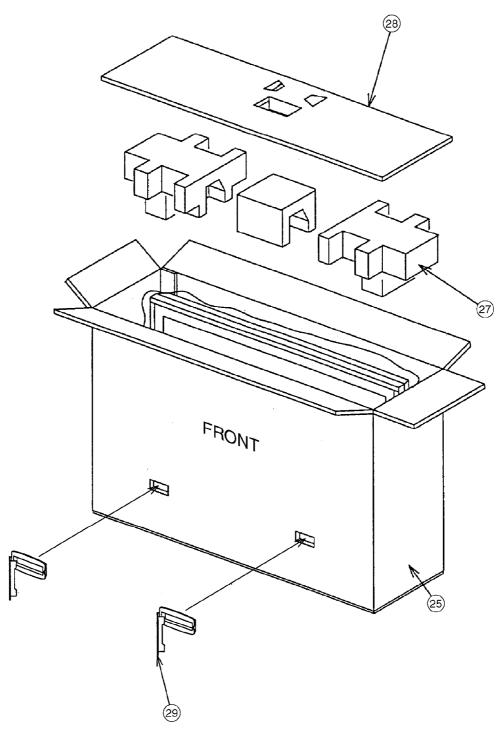

15.5. Mechanical Replacement Parts List

Note:

All parts except parts mentioned [PAVCCZ] in the Remarks column are supplied by PAVC-CSG. Parts mentioned [PAVCCZ] are supplied by PAVCCZ.

Ref. No.	Part No.	Part Name & Description	Pcs	Remarks
1	EAS10D85A	SQUAWKER SP	2	
2	J0KF00000018	FERRITE CORE (INCLUDED ACCESSORY)	1	
	J0KF00000038	CORE (FOR SPEAKER LEAD WIRE)	2	
	J2ZZ00000054	RF-CABLE	1	TH-50PX600B PAVCCZ
	K1YD68000002	68P CONNECTOR	1	
	K1YD80000002	80P CONNECTOR	1	
3	K2AHYH000008	AC INLET	1	PAVCCZ A
<u>4</u>	K2CN3DH00006	AC CORD(CONTINENTAL)	1	TH-50PV600E A
4	K2CT3DH00018	AC CORD	1	тн-50РХ600В ⚠
<u>5</u>	L6FALEFH0041	FAN (80MM)	3	
<u>6</u>	MD50H09A1J	PLASMA DISPLAY PANEL	1	Δ
<u>7</u>	N2QAYB000025	REMOTE CONTROL	1	TH-50PV600E PAVCCZ
7	N2QAKB000059	REMOTE CONTROL	1	TH-50PX600B PAVCCZ
<u>8</u>	TBXA48602	POWER BUTTON	1	
9	TBXA48803	CONTROL BOTTON	1	
<u>10</u>	TES4G204	POWER BOTTON SPRING	1	
<u></u>	TESA274	LEAF SPRING	1	
12	TESA275	SD DOOR SPRING	1	
	THEL0429	SCREW	26	
	THTA0419	HOOK SCREW	2	
	THTD011J	SCREW	2	
	THTD013N	SCREW	9	
	THTF011N	SCREW	166	TH-50PV600E PAVCCZ
	THTF011N	SCREW	176	TH-50PX600B PAVCCZ
13	TKGA5279	FRONT GLASS	1	PAVCCZ
14	TKKC5237	LED PANEL	1	TH-50PX600B PAVCCZ
14	TKKC5244	LED PANEL	1	TH-50PV600E PAVCCZ
15	TKKC5238	SD LIGHT PANEL	1	111 001 10002 1711 002
16	TKKL5231	M8 SPACER CAP	4	
17	TKKL5269-1	COVER	1	
18	TKPA94301	INLET COVER	1	
<u>19</u>	TKPB00605	DOOR	1	
<u>13</u> 20	TKPB02902	SD DOOR	1	
<u>20</u> 21	TKRA46201	REAR COVER HANDLE	2	
<u>21</u> 22			2	
<u> </u>	TKRA52101	HOLE CAP		DAVCCZ
	TMK0E735 TMK0E739	SPONGE (TKG/LEET/DIGHT)	2	PAVCCZ
		SPONGE (TKG/LEFT/RIGHT)	2	PAVCCZ
	TMKG670	FAN SPONGE	3	TH FORVESOR
	TMM15481	CLAMPER	1	TH-50PX600B
	TMM16474	CLAMPER	1	
	TMM17499	CLAMPER	1 -	TH 5001/0005 5 11/005
	TMM25401	CLAMPER	7	TH-50PV600E PAVCCZ
	TMM25401	CLAMPER	8	TH-50PX600B PAVCCZ
	TMM7464-2	CLAMPER	2	
	TMM7468-1	CLAMPER	2	
	TMME047	CLAMPER	3	
	TMME061	CLAMPER	1	
	TMME075	EADG SADOLE	3	TH-50PV600E
	TMME144	CLAMPER	3	
	TMME190	CLAMPER	3	TH-50PV600E
	TMME190	CLAMPER	4	TH-50PX600B
	TMME226	CLAMPER	1	

Ref. No.	Part No.	Part Name & Description	Pcs	Remarks
	TMME258	CABLE CLAMPER (INCLUDED ACCESSORY)	2	
	TMME260	CLAMPER	25	
	TMMJ068	RUBBER(FAN)	9	
	TMMX134	M8-SPACER	4	PAVCCZ
<u>23</u>	TMWX040	SD LIGHT PANEL BRACKET	1	PAVCCZ
<u>24</u>	TPC0E65901	CARTON BOX BOTTOM	1	PAVCCZ
<u>25</u>	TPC0E66001	CARTON BOX TOP	1	PAVCCZ A
<u> 26</u>	TPD0E0113	CUSHION BOTTOM	1	PAVCCZ
27	TPD0E0114	CUSHION TOP	1	PAVCCZ
<u>28</u>	TPD0E9036	PAD TOP	1	PAVCCZ
<u>29</u>	TPD169487	JOINT	4	
<u>30</u>	TPDF1197	ACCESSORIES BOX	1	
<u>31</u>	TPE0E4013	TOP PROTECT SHEET	1	PAVCCZ
<u>32</u>	TPEH170	PROTECT COVER	1	
33	TQB0E0262	INSTRUCTION BOOK (ENGLISH)	1	TH-50PX600B PAVCCZ
33	TQB0E0263A	INSTRUCTION BOOK (GERMAN)	1	TH-50PV600E PAVCCZ
33	TQB0E0263B	INSTRUCTION BOOK (DUTCH)	1	TH-50PV600E PAVCCZ
33	TQB0E0263C	INSTRUCTION BOOK (ITALIAN)	1	TH-50PV600E PAVCCZ
33	TQB0E0263D	INSTRUCTION BOOK (FRENCH)	1	TH-50PV600E PAVCCZ
33	TQB0E0263E	INSTRUCTION BOOK (SPANISH)	1	TH-50PV600E PAVCCZ
33	TQB0E0263F	INSTRUCTION BOOK (SWEDISH)	1	TH-50PV600E PAVCCZ
33	TQB0E0263K	INSTRUCTION BOOK (DANISH)	1	TH-50PV600E PAVCCZ
33	TQB0E0263M	INSTRUCTION BOOK (BULGALIA)	1	TH-50PV600E PAVCCZ
33	TQB0E0263N	INSTRUCTION BOOK (RUMANIAN)	1	TH-50PV600E PAVCCZ
33	TQB0E0263P	INSTRUCTION BOOK (POLISH)	1	TH-50PV600E PAVCCZ
33	TQB0E0263Q	INSTRUCTION BOOK (HUNGARIA)	1	TH-50PV600E PAVCCZ
33	TQB0E0263R	INSTRUCTION BOOK (CZECH)	1	TH-50PV600E PAVCCZ
33	TQB0E0263U	INSTRUCTION BOOK (ENGLISH)	1	TH-50PV600E PAVCCZ
<u>34</u>	TQEF035	POLY BAG(FILTER)	1	
	TSXL514	CABLE (D32-C31)	1	
	TSXL515	CABLE (D33-C41)	1	
	TSXL516	CABLE (D31-C21)	1	
	TSXL517	CABLE (D34-C51)	1	
	TSXL518	CABLE (C10-C20/C50-C60)	2	
	TSXL519	CABLE (C22-C32/C52-C42)	2	
	TSXL520	CABLE (DG1-H1)	1	
	TSXL521	CABLE (DG15-HC15)	1	
	TSXL524	CABLE (DG3-D3)	1	
	TSXL525	CABLE (DG20-PA20)	1	
	TSXL545	CABLE (GS12-SD)	1	
<u>35</u>	TTUA1380	REAR COVER	1	TH-50PX600B PAVCCZ
35	TTUA1386	REAR COVER	1	TH-50PV600E PAVCCZ
<u>36</u>	TXFAB01BETB	SPEAKER BOX ASS'Y (LEFT)	1	PAVCCZ
<u>37</u>	TXFAB02BETB	SPEAKER BOX ASS'Y (RIGHT)	1	PAVCCZ
38	TXFKE01BETE	ESCUTCHEON ASS'Y	1	TH-50PV600E PAVCCZ
38	TXFKE01BETB	ESCUTCHEON ASS'Y	1	TH-50PX600B PAVCCZ
<u>39</u>	TXFMZ01BETB	STAND BLOCK ASS'Y (LEFT)	1	PAVCCZ
_	1 1	()		1

Ref. No.	Part No.	Part Name & Description	Pcs	Remarks
<u>40</u>	TXFMZ02BETB	STAND BLOCK ASS'Y (RIGHT)	1	PAVCCZ
	XTB4+12GFJ	SCREW	1	
	XTB4+12GFJK	SCREW	71	
	XTV3+10GFJ	SCREW	4	
	XTV3+10JFJK	SCREW	6	
	XTW3+10TFJ	SCREW	2	
	XTW4+25DFJ	SCREW	14	PAVCCZ
	XYN2+F5FJ	SCREW (TOP-BOT)	1	
	XYN3+F10FJ	SCREW	1	
	XYN3+F6FJ	SCREW	1	
	XYN3+F8FJ	SCREW	27	TH-50PV600E
	XYN3+F8FJ	SCREW	33	TH-50PX600B
	XYN3+J12FJ	SCREW	40	
	XYN3+J8FJ	SCREW ROHS	10	TH-50PV600E
	XYN3+J8FJ	SCREW ROHS	6	TH-50PX600B
	XYN4+E8FJ	SCREW	1	
	XYN4+F10FJK	SCREW	12	
	XYN5+C15FJ	SCREW	8	
<u>11</u>	XZBT6530	POLY BAG(INST BOOK)	1	

16. Electrical Replacement Parts List

16.1. Replacement Parts List Notes

Important Safety Notice

Components identified by Amark have special characteristics important for safety. When replacing any of these components, use only manufacturer's specified parts.

RTL (Retention Time Limited)

Note: The marking (RTL) indicates that the Retention Time is Limited for this item.

After the discontinuation of this assembly in production, the item will continue to be available for a specific period of time. The retention period of availability is dependant on the type of assembly, and in accordance with the laws governing part and product retention.

After the end of this period, the assembly will no longer be available.

Abbreviation of part name and description

1. Resistor2. CapacitorExample:Example:

ERD25TJ104 \underline{C} 100KOHM, \underline{J} , 1/4W ECKF1H103ZF \underline{C} 0.01UF, \underline{Z} , 50V

Type Allowance Type Allowance

Туре	Allowance
C: Carbon F: Fuse M: Metal Oxide Metal FIlm S: Solid W: Wire Wound	F:±1% G:±2% J:±5% K:±10% M:±20%

Туре	Allowance
C : Ceramic E : Electrolytic P : Polyester Polyprop lene T : Tantalum	C:±0.25pF D:±0.5pF F:±1pF G:±3pF J:±5pF K:±10pF L:±15pF M:±20pF P:+100%,-0% Z:+80%,-20%

16.2. Electrical Replacement Parts List

Note:

All parts except parts mentioned [PAVCCZ] in the Remarks column are supplied by PAVC-CSG. Parts mentioned [PAVCCZ] are supplied by PAVCCZ.

Ref. No.	Part No.	Part Name & Description	Pcs	Remarks
F601.602	K5D103BMA001	TIME LAG FUSE HIGH	2	<u> </u>
C001	ECA0JM102	E 1000UF, 6.3V	1	
C002,03	ECA1HM100	E 10UF, 50V	2	
C007	ECJ1XF1C104Z	C 0.1UF, Z, 16V	1	
C009	ECJ1VF1H104Z	C 0.1UF, Z, 50V	1	
C10	K1MN55BA0076	55P CONNECTOR	1	
C013	ECJ1XF1C104Z	C 0.1UF, Z, 16V	1	
C016	ECJ1XF1C104Z	C 0.1UF, Z, 16V	1	
C018,19	ECJ1VC1H330J	C 33PF, J, 50V	2	
C020	ECJ1VF1H103Z	C 0.010UF, Z, 50V	1	
C20	K1MN55BA0076	55P CONNECTOR	1	
C021	ECJ1XC1H101J	C 100PF, J, 50V	1	
C21	K1MN80BA0076	80P CONNECTOR	1	
C22	K1MN20BA0231	20P CONNECTOR	1	
C31	K1MN55BA0076	55P CONNECTOR	1	
C32	K1MN20BA0231	20P CONNECTOR	1	
C33	K1KA04AA0150	4P CONNECTOR	1	
C41	K1MN68BA0076	68P CONNECTOR	1	
C42	K1MN20BA0231	20P CONNECTOR	1	
C43	K1KA12BA0107	12P CONNECTOR	1	
C44	K1KA04BA0107	4P CONNECTOR	1	
C50	K1MN55BA0076	55P CONNECTOR	1	
C51	K1MN80BA0076	80P CONNECTOR	1	
C52	K1MN20BA0231	20P CONNECTOR	1	
C60	K1MN55BA0076	55P CONNECTOR	1	
C1100	ECJ0EB1A104K	C 0.1UF, K, 10V	1	
C1102	ECJ0EB1A104K	C 0.1UF, K, 10V	1	
C1103	ECJ0EB1E271K	C 270PF, K, 25V	1	
C1105	ECJ0EB1E271K	C 270PF, K, 25V	1	
C1106	ECJ1VB1A105K	C 0.01UF, Z, 50V	1	
C1107	EEEHB0G101R	C 100PF, J, 4V	1	
C1109-11	ECJ0EB1A104K	C 0.1UF, K, 10V	3	
C1112	ECJ0EB1E271K	C 270PF, K, 25V	1	
C1114	ECJ0EB1A104K	C 0.1UF, K, 10V	1	
C1116	ECJ0EB1A104K	C 0.1UF, K, 10V	1	
C1118-23	ECJ0EB1A104K	C 0.1UF, K, 10V	6	
C1125	ECJ0EB1A104K	C 0.1UF, K, 10V	1	
C1127-32	ECJ0EB1A104K	C 0.1UF, K, 10V	6	
C1133,34	ECJ1XC1H150J	C 15PF, J, 50V	2	
C1135,34	ECJ0EB1A104K	C 0.1UF, K, 10V	8	
C1144-50	ECJ0EB1A104K	C 0.1UF, K, 10V	7	
C1152	ECJ0EB1A104K	C 0.1UF, K, 10V	1	
C1153	EEEHB0G101R	C 100PF, J, 4V	1	
C1154	ECJ0EB1A104K	C 0.1UF, K, 10V	1	
C1155	ECJ0EB1C103K	C0.010UF, K, 16V	1	
C1156,57	ECJ1XC1H220J	C 22PF, J, 50V	2	
C1158,37	F1J0J1060004	C 0.010UF, K, 16V	1	
C1159	ECJ0EB1A104K	C 0.1UF, K, 10V	1	
			1	
C1160	F2G0J470A019	E 47UF 6.3V	_	
C1161	ECJ1VB1A105K	C 0.01UF, Z, 50V	1	
C1162	ECJ0EB1C103K	C0.010UF, K, 16V	1	

Ref. No.	Part No.	Part Name & Description	Pcs	Remarks
C1170,71	ECJ0EB1A104K	C 0.1UF, K, 10V	2	TH-50PX600B
C1172	ECJ0EB1A104K	C 0.1UF, K, 10V	1	
C1177	ECJ1VB1A334K	C 0.1UF, K, 16V	1	
C1178	ECJ1VB1A105K	C 0.01UF, Z, 50V	1	
C1180,81	ECJ1VB1H221K	C 220UF, K, 50V	2	
C1186	ECJ0EB1A104K	C 0.1UF, K, 10V	1	
C1190	ECJ0EB1C103K	C0.010UF, K, 16V	1	
C1209	ECJ1VB1A105K	C 0.01UF, Z, 50V	1	
C1212	ECJ1XC1H151J	C 150PF, J, 50V	1	
C1219,20	EEEHP1C100R	C 10PF, J, 16V	2	
C1221	ECJ0EB1H102K	C 1000PF, K, 50V	1	
C1222,23	F1J0J1060004	C 0.010UF, K, 16V	2	
C1226	F1J0J1060004	C 0.010UF, K, 16V	1	
C1227	ECJ0EB1H101K	C 100PF, K, 50V	1	
C1228-34	EEEHB1C470P	C 47PF, J, 16V	7	
C1294	ECJ1XC1H330J	C 33PF, J, 50V	1	
C2005-18	ECJ1XC1H561J	C 560PF, J, 50V	14	
C2019	ECA1CM221	E 220UF, 16V	1	
C2020	ECA1HM220	E 22UF, 50V	1	
C2021,22	ECJ1XC1H561J	C 560PF, J, 50V	2	
C2103,04	ECJ3YB1A106M	C 10UF, M,6.3V	2	
C2111	ECJ2VF1C104Z	C 0.1UF, Z, 16V	1	
C2116	ECJ2VF1C104Z	C 0.1UF, Z, 16V	1	
C2118,19	ECEA1CN470U	E 47UF, 16V	2	
C2122,23	ECJ3YB1A106M	C 10UF, M,6.3V	2	
C2125,26	ECJ1VB1H102K	C 1000PF, K, 50V	2	
C2127	ECA1CMH101	E 100UF, 16V	1	
C2128	ECJ2VF1C104Z	C 0.1UF, Z, 16V	1	
C2129,30	F1J1A1050002	C 1UF, Z, 50V	2	
C2131	ECJ2VF1C104Z	C 0.1UF, Z, 16V	1	
C2132	EEEHB1C100R	C 10PF, J, 16V	1	
C2133,34	ECJ1XC1H470J	C 47PF, J, 50V	2	
C2135,36	ECJ2FB1C105K	C 1UF, K, 16V	2	
C2139-43	ECJ1VB1H103K	C 0.001UF, K, 50V	5	
C2144,45	ECJ3YB1A106M	C 10UF, M,6.3V	2	
C2146	ECJ2VF1C104Z	C 0.1UF, Z, 16V	1	
C2147	ECA1HM220	E 22UF, 50V	1	
C2148-50	ECJ2FB1C105K	C 1UF, K, 16V	3	
C2152	ECJ2FB1C105K	C 1UF, K, 16V	1	
C2153	ECJ2FF1C475Z	C 0.047UF, Z, 16V	1	
C2154	ECJ2VF1C104Z	C 0.1UF, Z, 16V	1	
C2155	ECJ2FB1C105K	C 1UF, K, 16V	1	
C2156	ECJ3YB1A106M	C 10UF, M,6.3V	1	
C2157	ECJ2FB1C105K	C 1UF, K, 16V	1	
C2158	ECJ3YB1A106M	C 10UF, M,6.3V	1	
C2159,60	ECJ2FB1C105K	C 1UF, K, 16V	2	
			1	
22161	ECA1CMH101	E 100UF, 16V		
C2162-69	ECJ2FB1C105K	C 1000PE K 50V	8	
C2170-72	ECJ1VB1H102K	C 1000PF, K, 50V	3	
C2173	ECJ1VB1H103K	C 0.001UF, K, 50V	1	
C2174	ECJ1VB1H102K	C 1000PF, K, 50V	1	
C2175-77	ECJ1VB1H103K	C 0.001UF, K, 50V	3	
C2178,79	EEEHB1C100R	C 10PF, J, 16V	2	

Ref. No.	Part No.	Part Name & Description	Pcs	Remarks
C2183	EEEHB1H3R3R	C 3.3PF, J, 50V	1	
C2184,85	ECJ2VF1C104Z	C 0.1UF, Z, 16V	2	
C2189,90	ECJ2FB1C105K	C 1UF, K, 16V	2	
C2191	ECJ2VF1C104Z	C 0.1UF, Z, 16V	1	
C2192	EEEHB1C100R	C 10PF, J, 16V	1	
C2193,94	ECJ2FB1C105K	C 1UF, K, 16V	2	
C2195	ECJ1XC1H470J	C 47PF, J, 50V	1	
C2196	ECJ2VF1C104Z	C 0.1UF, Z, 16V	1	
C2197	ECJ2FB0J225K	C 2.2UF, Z, 16V	1	
C2198	EEEHB0J101P	C 100PF, J, 6.3V	1	
C2199	ECJ1VC1H560J	C 56PF, J, 50V	1	
C2200	ECJ1XC1H470J	C 47PF, J, 50V	1	
C2201	ECJ1XC1H030C	C 3PF, C, 50V	1	
C2202	ECJ1XC1H050C	C 5PF, C, 50V	1	
C2203	ECJ1VC1H100C	C 10PF, C, 50V	1	
C2204	ECJ1XC1H220J	C 22PF, J, 50V	1	
C2211	ECJ1VB1C104K	C 0.1UF, K, 16V	1	
C2213	ERJ3GEY0R00	M 0 OHM, 1/16W	1	
C2217	F1H0J1050012	C 1UF, K, 16V	1	
C2218-21	ECJ3YB1A106M	C 10UF, M,6.3V	4	
C2222	ECJ2VF1C104Z	C 0.1UF, Z, 16V	1	
C2223	ECJ1XC1H390J	C 39PF, J, 50V	1	
C2225	ECJ2FB1C105K	C 1UF, K, 16V	1	
C2226	ECJ1VB1H102K	C 1000PF, K, 50V	1	
C2227	ECA1CMH101	E 100UF, 16V	1	
C2228	ECJ1VB1H103K	C 0.001UF, K, 50V	1	
C2229,30	ECA1CMH101	E 100UF, 16V	2	
C2231	ECA1CHG470	E 47UF, 16V	1	
C2232	F1H0J1050012	C 1UF, K, 16V	1	
C2233,34	ECJ1VB1H102K	C 1000PF, K, 50V	2	
C2235	F1H0J1050012	C 1UF, K, 16V	1	
C2236	ECA1CHG470	E 47UF, 16V	1	
C2237-40	ECJ1VB1H103K	C 0.001UF, K, 50V	4	
C2243	ECA1CHG470	E 47UF, 16V	1	
C2301	ECA1EHG471	E 470UF, 25V	1	
C2302,03	ECA1CMH101	E 100UF, 16V	2	
C2304,05	ECJ1VB1H103K	C 0.001UF, K, 50V	2	
C2306	ECJ1VB1C823K	C 0.082UF, K, 16V	1	
C2307	ECA1CMH101	E 100UF, 16V	1	(H)
C2307	ECJ1VB1C823K	C 0.082UF, K, 16V	1	(PA)
C2308,09	ECJ1VB1H822K	C 8200PF, K, 50V	2	v- · 7
C2310	ECJ1XB1C393K	C 0.039UF, K, 16V	1	
C2311,12	ECJ1VB1H822K	C 8200PF, K, 50V	2	
C2311,12	ECJ1XB1C393K	C 0.039UF, K, 16V	1	
C2314	ECJ1VB1C105K	C 0.01UF, K, 16V	1	
C2314	ECJ2FB1A105K	C 1UF, K, 10V	1	
C2320	ECJ2FB1A105K	C 1UF, K, 10V	1	
C2320	ECJ2FB1H103K	C 0.01UF, K, 50V	1	
C2321			1	
	ECJ2FB1A105K	C 1UF, K, 10V	2	
C2323,24	ECJ2FB1E224K	C 22UF, K, 25V		
C2325,26	ECJ1VB1E104K	C 0.10UF, K, 25V	2	
C2327	F1J1H474A757	C 0.47UF, 50V	1	
C2328-31	ECJ2FB1E105K	C 1UF, K, 25V	4	
C2332,33	ECA1EHG471	E 470UF, 25V	2	

Ref. No.	Part No.	Part Name & Description	Pcs	Remarks
C2334,35	ECJ1VB1E104K	C 0.10UF, K, 25V	2	
C2336	F1J1H474A757	C 0.47UF, 50V	1	
C2337,38	ECJ2FB1E224K	C 22UF, K, 25V	2	
C2341	ECJ3YB1E106M	C 10 UF, K, 25V	1	
C2342	ECJ2FB1E105K	C 1UF, K, 25V	1	
C2346	ECJ2FB1A105K	C 1UF, K, 10V	1	
C2349	ECJ2FB1A105K	C 1UF, K, 10V	1	
C2350	ECJ2XB1H103K	C 0.01UF, K, 50V	1	
C2351	ECJ2FB1A105K	C 1UF, K, 10V	1	
C2352,53	ECJ2FB1E224K	C 22UF, K, 25V	2	
C2354,55	ECJ1VB1E104K	C 0.10UF, K, 25V	2	
C2356	F1J1H474A757	C 0.47UF, 50V	1	
C2357-60	ECJ2FB1E105K	C 1UF, K, 25V	4	
C2361,62	ECA1EHG471	E 470UF, 25V	2	
C2363,64	ECJ1VB1E104K	C 0.10UF, K, 25V	2	
C2365	F1J1H474A757	C 0.47UF, 50V	1	
C2366,67	ECJ2FB1E224K	C 22UF, K, 25V	2	
C2368,69	ECJ1XB1C104K	C 0.1UF, Z, 16V	2	
C2370	ECJ3YB1E106M	C 10 UF, K, 25V	1	
C2371	ECJ2FB1E105K	C 1UF, K, 25V	1	
C2372	ECA1HHG100	E 10UF, 50V	1	
C2373	ECJ1VF1H104Z	C 0.1UF, Z, 50V	1	
C2374	ECJ1VF1A105Z	C 1UF, Z, 10V	1	
C2380,81	ECJ1VB1H103K	C 0.001UF, K, 50V	2	
C2382	ECJ1VB1C105K	C 0.01UF, K, 16V	1	
C2385	ECJ2FB1A105K	C 1UF, K, 10V	1	
C2387	ECJ2FB1A105K	C 1UF, K, 10V	1	
C2389	ECJ2FB1A105K	C 1UF, K, 10V	1	
C2391	ECJ2FB1A105K	C 1UF, K, 10V	1	
C2393-96	ECJ1VB1C105K	C 0.01UF, K, 16V	4	
C2393-90 C2401	ECJ2FB1A105K	C 1UF, K, 10V	1	
C2402	ECJ2FB0J106M	C 10UF, Z,6.3V	1	
C2402	ECJ2FB03T06W ECJ1VB1H103K	· · ·	1	
C2403	ECJ2FB1A105K	C 0.001UF, K, 50V	1	
	ECJ2FB1A105K	C 1UF, K, 10V		
C2405		C 10UF, Z,6.3V	1	
C2416	ECJ1VB1H103K	C 0.001UF, K, 50V		
C2417,18	ECJ2FB0J106M	C 10UF, Z,6.3V	2	
C2430	ECJ1VF1A105Z	C 1UF, Z, 10V	1	
C2510,11	ECJ2VF1C105Z	C 1UF, Z, 16V	2	
C2512	ECJ3XB0J106M	C 10UF, M,6.3V	1	
C2515	ECJ1VB1H103K	C 0.001UF, K, 50V	1	TH FORWARD
C2517	ECJ1VB1H103K	C 0.001UF, K, 50V	1	TH-50PX600B
C2521	ECJ1VB1H103K	C 0.001UF, K, 50V	1	
C3001-03	ECJ1VB1H102K	C 1000PF, K, 50V	3	
C3021	F1J1A1050002	C 1UF, Z, 50V	1	
C3022,23	ECJ1VB1H103K	C 0.001UF, K, 50V	2	
C3024-28	F1J1A1050002	C 1UF, Z, 50V	5	
C3029	ECJ2VF1C105Z	C 1UF, Z, 16V	1	
C3030	ECJ2VF1C104Z	C 0.1UF, Z, 16V	1	
C3031	F1J1A1050002	C 1UF, Z, 50V	1	
C3033	F1J1A1050002	C 1UF, Z, 50V	1	
C3035,36	F1J1A1050002	C 1UF, Z, 50V	2	
C3038	ECJ2VF1C104Z	C 0.1UF, Z, 16V	1	
C3039	F1J1A1050002	C 1UF, Z, 50V	1	

Ref. No.	Part No.	Part Name & Description	Pcs	Remarks
C3040	ECJ2VF1C104Z	C 0.1UF, Z, 16V	1	
C3041	ECJ1VB1H103K	C 0.001UF, K, 50V	1	
C3042,43	F1J1A1050002	C 1UF, Z, 50V	2	
C3045,46	ECJ1VB1H103K	C 0.001UF, K, 50V	2	
C3047	F1J1A1050002	C 1UF, Z, 50V	1	
C3048	ECJ1VB1H103K	C 0.001UF, K, 50V	1	
C3049-56	F1J1A1050002	C 1UF, Z, 50V	8	
C3058	ECA1EM471	E 470UF, 25V	1	
C3059	ECJ2VF1C105Z	C 1UF, Z, 16V	1	
C3061-64	ECJ2VF1C104Z	C 0.1UF, Z, 16V	4	
C3065	ECJ1VB1H103K	C 0.001UF, K, 50V	1	
C3066	F1J1A1050002	C 1UF, Z, 50V	1	
C3067	ECJ1VB1H103K	C 0.001UF, K, 50V	1	
C3068	ECJ2VF1C104Z	C 0.1UF, Z, 16V	1	
C3070	ECA1EM471	E 470UF, 25V	1	
C3071	ECJ2VF1C104Z	C 0.1UF, Z, 16V	1	
C3072	ECA1EM471	E 470UF, 25V	1	
C3073	ECJ2VF1C104Z	C 0.1UF, Z, 16V	1	
C3074	ECA1EM471	E 470UF, 25V	1	
C3075	ECA1CM221	E 220UF, 16V	1	
C3076	ECA1EM471	E 470UF, 25V	1	
C3207	ECA1AM102	E 1000UF, 10V	1	
C3214	ECJ2VF1C104Z	C 0.1UF, Z, 16V	1	
C3216	ECJ2VF1C104Z	C 0.1UF, Z, 16V	1	
C3226-28	ECJ2VF1C104Z	C 0.1UF, Z, 16V	3	
C3229	ECJ2FF1A106Z	C 0.001UF, Z, 10V	1	
C3230	ECJ2VF1C104Z	C 0.1UF, Z, 16V	1	
C3231	ECJ1XF1C104Z	C 0.1UF, Z, 16V	1	
C3233	ECJ2VF1C104Z	C 0.1UF, Z, 16V	1	
C3241	ECJ2VF1C104Z	C 0.1UF, Z, 16V	1	
C3262	ECJ1VB1H472K	C 4700PF, K, 50V	1	
C3268	ECJ1VB1H103K	C 0.001UF, K, 50V	1	
C3305	ECJ1XF1C104Z	C 0.1UF, Z, 16V	1	
C3330	ECA1CM470	E 47UF, 16V	1	
C3331	ECJ2XB1H103K	C 0.01UF, K, 50V	1	
C3332	ECJ2VF1C104Z	C 0.1UF, Z, 16V	1	
C3334	ECEA1CN470U	E 47UF, 16V	1	
C3335	ECJ2VB1C104K	C 0.1UF, K, 16V	1	
C3336	ECEA1CN470U	E 47UF, 16V	1	
C3337	ECJ2VB1C104K	C 0.1UF, K, 16V	1	
C3338	ECEA1CN470U	E 47UF, 16V	1	
C3339	ECJ2VB1C104K	C 0.1UF, K, 16V	1	
C3340-42	ECJ2VF1C104Z	C 0.1UF, Z, 16V	3	
C3701	ECJ2XC1H561K	C 560PF, K, 50V	1	
C3703	ECJ2XC1H561K	C 560PF, K, 50V	1	
C3711,12	ECJ2VF1H333Z	C 0.033UF, Z, 50V	2	
C3750,51	ECJ2XC1H102K	C 1000PF, K, 50V	2	
C4003-08	F1J0J1060004	C 0.010UF, K, 16V	6	
C4009	ECJ1VB0J475K	C 4.7UF, K, 6.3V	1	
C4012,13	ECJ1XC1H180J	C 18PF, J, 50V	2	
C4014,15	F1J0J1060004	C 0.010UF, K, 16V	2	
C4023	F1J0J1060004	C 0.010UF, K, 16V	1	
C4026	ECJ0EB1A104K	C 0.1UF, K, 10V	1	
C4027	ECJ1VB1A105K	C 0.01UF, Z, 50V	1	

Ref. No.	Part No.	Part Name & Description	Pcs	Remarks
C4028	ECJ0EB1C103K	C0.010UF, K, 16V	1	
C4112	F1J0J1060004	C 0.010UF, K, 16V	1	
C4117	ECJ0EB1A104K	C 0.1UF, K, 10V	1	
C4142	F1H1C104A065	C 0.1UF, K, 16V	1	
C4144-46	ECJ1XC1H050C	C 5PF, C, 50V	3	
C4148-51	ECJ1VB1A105K	C 0.01UF, Z, 50V	4	
C4157	F1J0J1060004	C 0.010UF, K, 16V	1	
C4158	ECJ1VB1A105K	C 0.01UF, Z, 50V	1	
C4159	F1H1C104A065	C 0.1UF, K, 16V	1	
C4160	ECJ0EB1A104K	C 0.1UF, K, 10V	1	
C4161,62	ECJ1VB1A105K	C 0.01UF, Z, 50V	2	
C4165	ECJ0EB1A104K	C 0.1UF, K, 10V	1	
C4168	ECJ1XC1H680J	C 68PF, J, 50V	1	
C4169	ECJ1VB1A105K	C 0.01UF, Z, 50V	1	
C4171	ECJ1XC1H471J	C 470PF, J, 50V	1	
C4172,73	F1H1C104A065	C 0.1UF, K, 16V	2	
C4174	ECJ0EB1A104K	C 0.1UF, K, 10V	1	
C4175	F1H1C104A065	C 0.1UF, K, 16V	1	
C4176	ECJ1VB0J225K	C 2.2UF, K, 6.3V	1	
C4177	ECJ2FB1C684K	C 68UF, Z, 16V	1	
C4178	ECJ1XB1C393K	C 0.039UF, K, 16V	1	
C4180	F1H1C104A065	C 0.1UF, K, 16V	1	
C4181	ECJ0EB1C103K	C0.010UF, K, 16V	1	
C4182	ECJ0EB1A104K	C 0.1UF, K, 10V	1	
C4185,86	ECJ3XB0J106M	C 10UF, M,6.3V	2	
C4187	F2G0J470A019	E 47UF 6.3V	1	
C4188	F1J0J1060004	C 0.010UF, K, 16V	1	
C4189-92	ECJ0EB1A104K	C 0.1UF, K, 10V	4	
C4193	ECJ0EB1H102K	C 1000PF, K, 50V	1	
C4194-97	F1H1C104A065	C 0.1UF, K, 16V	4	
C4198	ECJ1VB1A105K	C 0.01UF, Z, 50V	1	
C4199	ECJ0EB1C103K	C0.010UF, K, 16V	1	
C4200	F2G0J470A019	E 47UF 6.3V	1	
C4201	ECJ0EB1C103K	C0.010UF, K, 16V	1	
C4204	ECJ0EB1A104K	C 0.1UF, K, 10V	1	
C4205.06	F1H1C104A065	C 0.1UF, K, 16V	2	
C4208,09	ECJ0EB1A104K	C 0.1UF, K, 10V	2	
C4211	ECJ0EB1A104K	C 0.1UF, K, 10V	1	
C4212	EEEHB0G221P	C 220PF, J, 4V	1	
			1	
C4213	ECJ0EB1A104K ECJ1VB1A105K	C 0.1UF, K, 10V	1	
C4214		C 0.01UF, Z, 50V	1	
C4215	ECJ0EB1A104K	C 0.1UF, K, 10V		
C4216	F2G0J470A019	E 47UF 6.3V	1	
C4217	F1H1C104A065	C 0.1UF, K, 16V	1	
C4218	ECJ0EB1H102K	C 1000PF, K, 50V	1	
C4219	ECJ1VB1A105K	C 0.01UF, Z, 50V	1	
C4220	ECJ0EB1C103K	C0.010UF, K, 16V	1	
C4224	ECJ0EB1A104K	C 0.1UF, K, 10V	1	
C4225	ECJ1VB1A105K	C 0.01UF, Z, 50V	1	
C4226	ECJ1XC1H680J	C 68PF, J, 50V	1	
C4227	ECJ1VB1C823K	C 0.082UF, K, 16V	1	
C4228	ECJ0EB1C103K	C0.010UF, K, 16V	1	
C4229	F1H1C104A065	C 0.1UF, K, 16V	1	
C4230-34	ECJ0EB1A104K	C 0.1UF, K, 10V	5	

Ref. No.	Part No.	Part Name & Description	Pcs	Remarks
C4235	ECJ0EB1C103K	C0.010UF, K, 16V	1	
C4236-42	ECJ0EB1A104K	C 0.1UF, K, 10V	7	
C4243,44	ECJ1VB1A105K	C 0.01UF, Z, 50V	2	
C4245,46	ECJ0EB1A104K	C 0.1UF, K, 10V	2	
C4248	ECJ0EB1A104K	C 0.1UF, K, 10V	1	
C4250,51	ECJ0EB1A104K	C 0.1UF, K, 10V	2	
C4252	ECJ1VB1A105K	C 0.01UF, Z, 50V	1	
C4253	F2G0J470A019	E 47UF 6.3V	1	
C4255	ECJ1VB1H562K	C 5600PF, K, 50V	1	
C4256	ECJ1VB1A105K	C 0.01UF, Z, 50V	1	
C4257	ECJ1VB0J475K	C 4.7UF, K, 6.3V	1	
C4258	ECJ0EB1A104K	C 0.1UF, K, 10V	1	
C4259	ECJ1VB0J225K	C 2.2UF, K, 6.3V	1	
C4261-65	ECJ0EB1A104K	C 0.1UF, K, 10V	5	
C4266	ECJ0EB1C103K	C0.010UF, K, 16V	1	
C4267,68	ECJ0EB1A104K	C 0.1UF, K, 10V	2	
C4269	ECJ1VB1A105K	C 0.01UF, Z, 50V	1	
C4270	ECJ0EB1A104K	C 0.1UF, K, 10V	1	
C4272	F2G0J470A019	E 47UF 6.3V	1	
C4273-75	ECJ0EB1A104K	C 0.1UF, K, 10V	3	
C4276	ECJ1VB0J225K	C 2.2UF, K, 6.3V	1	
C4277	ECJ1VB0J475K	C 4.7UF, K, 6.3V	1	
C4281-84	ECJ0EB1A104K	C 0.1UF, K, 10V	4	
C4287,88	ECJ0EB1A104K	C 0.1UF, K, 10V	2	
C4289,90	EEEHB0J330R	C 33PF, J, 6.3V	2	
C4291,92	ECJ0EB1A104K	C 0.1UF, K, 10V	2	
C4296	F1J0J1060004	C 0.010UF, K, 16V	1	
C4297	ECJ0EB1A104K	C 0.1UF, K, 10V	1	
C4298-06	ECJ1VB1A105K	C 0.01UF, Z, 50V	9	
C4307-09	ECJ0EB1A104K	C 0.1UF, K, 10V	3	
C4310	ECJ0EB1C103K	C0.010UF, K, 16V	1	
C4311	ECJ0EB1A104K	C 0.1UF, K, 10V	1	
C4312	ECJ0EB1C103K	C0.010UF, K, 16V	1	
C4313,14	ECJ0EB1A104K	C 0.1UF, K, 10V	2	
C4315	F1J0J1060004	C 0.010UF, K, 16V	1	
C4316-18	ECJ0EB1A104K	C 0.1UF, K, 10V	3	
C4320-22	ECJ0EB1A104K	C 0.1UF, K, 10V	3	
C4325	ECJ0EB1A104K	C 0.1UF, K, 10V	1	
C4327	ECJ0EB1A104K	C 0.1UF, K, 10V	1	
C4329,30	ECJ0EB1A104K	C 0.1UF, K, 10V	2	
C4329,30 C4331	F1J0J1060004	C 0.010UF, K, 16V	1	
C4331 C4332	ECJ1VB1A105K	C 0.01UF, Z, 50V	1	
C4333-38	ECJ0EB1A104K	C 0.1UF, K, 10V	6	
C4339	ECJ1VB0J225K	C 2.2UF, K, 6.3V	1	
C4340	ECJ1XC1H471J	C 470PF, J, 50V	1	
C4340 C4341	EEEHB1C470P	C 47PF, J, 16V	1	
C4341 C4342	ECJ0EB1A104K	C 0.1UF, K, 10V	1	
C4342 C4343	EEEHB1C100R	C 10PF, J, 16V	1	
C4344,45	F1J0J1060004	C 0.010UF, K, 16V	2	
C4346	ECJ0EB1A104K	C 0.1UF, K, 10V	1	
C4347	ECJ1VB1A105K	C 0.01UF, Z, 50V	1	
C4348	EEEHB1C470P	C 47PF, J, 16V	1	
C4349	ECJ0EB1C103K	C0.010UF, K, 16V	1 1	

Ref. No.	Part No.	Part Name & Description	Pcs	Remarks
C4352,53	ECJ1XC1H330J	C 33PF, J, 50V	2	
C4354	ECJ0EB1C103K	C0.010UF, K, 16V	1	
C4360	ECJ1VB1A105K	C 0.01UF, Z, 50V	1	
C4362	F1J0J1060004	C 0.010UF, K, 16V	1	
C4363,64	ECJ0EB1A104K	C 0.1UF, K, 10V	2	
C4365	ECJ1VB1A105K	C 0.01UF, Z, 50V	1	
C4366	F2G0J470A019	E 47UF 6.3V	1	
C4367	ECJ0EB1A104K	C 0.1UF, K, 10V	1	
C4371	ECJ0EB1H102K	C 1000PF, K, 50V	1	
C4372	ECJ0EB1A104K	C 0.1UF, K, 10V	1	
C4373	ECJ1VB1A105K	C 0.01UF, Z, 50V	1	
C4374	ECJ0EB1A104K	C 0.1UF, K, 10V	1	
C4375,76	ECJ0EB1H102K	C 1000PF, K, 50V	2	
C4377	ECJ0EB1A104K	C 0.1UF, K, 10V	1	
C4379	ECJ0EB1A104K	C 0.1UF, K, 10V	1	
C4380	ECJ0EB1H102K	C 1000PF, K, 50V	1	
C4381,82	ECJ0EB1A104K	C 0.1UF, K, 10V	2	
C4383	ECJ0EB1H102K	C 1000PF, K, 50V	1	
C4384	ECJ0EB1A104K	C 0.1UF, K, 10V	1	
C4385	ECJ0EB1H102K	C 1000PF, K, 50V	1	
C4386	ECJ0EB1A104K	C 0.1UF, K, 10V	1	
C4387	ECJ0EB1H102K	C 1000PF, K, 50V	1	
C4388	ECJ1VB1A105K	C 0.01UF, Z, 50V	1	
C4389	ECJ0EB1A104K	C 0.1UF, K, 10V	1	
C4390	ECJ0EB1H102K	C 1000PF, K, 50V	1	
C4391	ECJ1VB1A105K	C 0.01UF, Z, 50V	1	
C4392	ECJ0EB1A104K	C 0.1UF, K, 10V	1	
C4393,94	ECJ0EB1H102K	C 1000PF, K, 50V	2	
C4395	ECJ0EB1A104K	C 0.1UF, K, 10V	1	
C4396	ECJ0EB1H102K	C 1000PF, K, 50V	1	
C4397,98	ECJ0EB1A104K	C 0.1UF, K, 10V	2	
C4399,00	ECJ1VB1A105K	C 0.01UF, Z, 50V	2	
C4401	ECJ0EB1A104K	C 0.1UF, K, 10V	1	
C4402,03	ECJ0EB1H102K	C 1000PF, K, 50V	2	
C4404	ECJ0EB1A104K	C 0.1UF, K, 10V	1	
C4405	ECJ1VB1A105K	C 0.01UF, Z, 50V	1	
C4406	ECJ0EB1H102K	C 1000PF, K, 50V	1	
C4407,08	ECJ0EB1A104K	C 0.1UF, K, 10V	2	
C4409	ECJ0EB1H102K	C 1000PF, K, 50V	1	
C4410	ECJ1VB1A105K	C 0.01UF, Z, 50V	1	
C4411,12	ECJ0EB1A104K	C 0.1UF, K, 10V	2	
C4413,14	ECJ0EB1H102K	C 1000PF, K, 50V	2	
C4415	ECJ0EB1A104K	C 0.1UF, K, 10V	1	
C4417	F2G0J470A019	E 47UF 6.3V	1	
C4418,19	ECJ1VB1A105K	C 0.01UF, Z, 50V	2	
C4420,21	ECJ0EB1A104K	C 0.1UF, K, 10V	2	
C4422-24	ECJ0EB1H102K	C 1000PF, K, 50V	3	
C4425,26	ECJ0EB1A104K	C 0.1UF, K, 10V	2	
C4427	ECJ0EB1H102K	C 1000PF, K, 50V	1	
C4428	ECJ0EB1A104K	C 0.1UF, K, 10V	1	
C4429,30	ECJ0EB1H102K	C 1000PF, K, 50V	2	
C4429,30 C4434	ECJ0EB1H102K	C 1000PF, K, 50V	1	
C4435	ECJ1VB1A105K	C 0.01UF, Z, 50V	1	
	_55.151A105K	3 3.3 . 3. , <u>2</u> , 30 t	•	

Ref. No.	Part No.	Part Name & Description	Pcs	Remarks
C4440	ECJ0EB1A104K	C 0.1UF, K, 10V	1	
C4441,42	ECJ0EB1H102K	C 1000PF, K, 50V	2	
C4447	ECJ1VB1A105K	C 0.01UF, Z, 50V	1	
C4448	ECJ0EB1C103K	C0.010UF, K, 16V	1	
C4451	ECJ0EB1H102K	C 1000PF, K, 50V	1	
C4452	ECJ0EB1A104K	C 0.1UF, K, 10V	1	
C4453,54	ECJ0EB1H102K	C 1000PF, K, 50V	2	
C4455	ECJ1VB1A105K	C 0.01UF, Z, 50V	1	
C4456	ECJ0EB1A104K	C 0.1UF, K, 10V	1	
C4457,58	ECJ0EB1H102K	C 1000PF, K, 50V	2	
C4459	ECJ0EB1A104K	C 0.1UF, K, 10V	1	
C4460	ECJ0EB1H102K	C 1000PF, K, 50V	1	
C4461	ECJ1XC1H820J	C 82PF, J, 50V	1	
C4462	ECJ0EB1A104K	C 0.1UF, K, 10V	1	
C4464	ECJ1VB1A105K	C 0.01UF, Z, 50V	1	
C4465	ECJ0EB1A104K	C 0.1UF, K, 10V	1	
C4466	ECJ0EB1C103K	C0.010UF, K, 16V	1	
C4467	ECJ0EB1A104K	C 0.1UF, K, 10V	1	
C4470	ECJ1VB1A105K	C 0.01UF, Z, 50V	1	
C4474	ECJ1VB1A105K	C 0.01UF, Z, 50V	1	
C4475,76	ECJ0EB1H102K	C 1000PF, K, 50V	2	
C4477	ECJ0EB1A104K	C 0.1UF, K, 10V	1	
C4478	ECJ1VB1A105K	C 0.01UF, Z, 50V	1	
C4479-81	ECJ0EB1H102K	C 1000PF, K, 50V	3	
C4482	ECJ1XC1H180J	C 18PF, J, 50V	1	
C4483	ECJ1XC1H150J	C 15PF, J, 50V	1	
C4493	ECJ0EB1A104K	C 0.1UF, K, 10V	1	
C4494	ECJ1VB1A105K	C 0.01UF, Z, 50V	1	
C4496	ECJ0EB1A104K	C 0.1UF, K, 10V	1	
C4497	EEEHB0G101R	C 100PF, J, 4V	1	
C4498	ECJ1XC1H471J	C 470PF, J, 50V	1	
C4499	EEFCD0G560ER	56UF,	1	
C4501	ECJ0EB1A104K	C 0.1UF, K, 10V	1	
C4502	ECJ0EB1C103K	C0.010UF, K, 16V	1	
C4503	ECJ0EB1A104K	C 0.1UF, K, 10V	1	
C4504	ECJ0EB1C103K	C0.010UF, K, 16V	1	
C4505	ECJ0EB1A104K	C 0.1UF, K, 10V	1	
C4506	ECJ0EB1C103K	C0.010UF, K, 16V	1	
			1	
C4507	ECJ0EB1A104K	C 0.1UF, K, 10V		
C4508	ECJ0EB1C103K	C0.010UF, K, 16V	1	
C4509-11	ECJ0EB1A104K	C 0.1UF, K, 10V	3	
C4512	ECJ0EB1C103K	C0.010UF, K, 16V	1	
C4513	ECJ0EB1A104K	C 0.1UF, K, 10V	1	
C4514	ECJ0EB1C103K	C0.010UF, K, 16V	1	
C4515,16	ECJ0EB1A104K	C 0.1UF, K, 10V	2	
C4517	ECJ0EB1C103K	C0.010UF, K, 16V	1	
C4518	ECJ0EB1A104K	C 0.1UF, K, 10V	1	
C4519	ECJ0EB1C103K	C0.010UF, K, 16V	1	
C4520	ECJ0EB1A104K	C 0.1UF, K, 10V	1	
C4521	ECJ0EB1C103K	C0.010UF, K, 16V	1	
C4522	ECJ0EB1A104K	C 0.1UF, K, 10V	1	
C4523	ECJ0EB1C103K	C0.010UF, K, 16V	1	
C4524	ECJ0EB1A104K	C 0.1UF, K, 10V	1	
C4525	ECJ0EB1C103K	C0.010UF, K, 16V	1	

Ref. No.	Part No.	Part Name & Description	Pcs	Remarks
C4526	ECJ0EB1A104K	C 0.1UF, K, 10V	1	
C4527	ECJ0EB1C103K	C0.010UF, K, 16V	1	
C4528	F2G0J470A019	E 47UF 6.3V	1	
C4529	ECJ0EB1A104K	C 0.1UF, K, 10V	1	
C4530,31	ECJ0EB1H102K	C 1000PF, K, 50V	2	
C4532,33	ECJ0EB1A104K	C 0.1UF, K, 10V	2	
C4534	ECJ0EB1H102K	C 1000PF, K, 50V	1	
C4535	ECJ0EB1A104K	C 0.1UF, K, 10V	1	
C4536	ECJ1VB1A105K	C 0.01UF, Z, 50V	1	
C4537	EEEHB0G101R	C 100PF, J, 4V	1	
C4538	ECJ0EB1A104K	C 0.1UF, K, 10V	1	
C4539	ECJ1VB1A105K	C 0.01UF, Z, 50V	1	
C4540	ECJ0EB1H102K	C 1000PF, K, 50V	1	
C4541	ECJ0EB1A104K		1	
		C 0.1UF, K, 10V		
C4543	F1H1C104A065	C 0.1UF, K, 16V	1	
C4544	ECJ1VB1C105K	C 0.01UF, K, 16V	1	
C5604	ECA1HHG100	E 10UF, 50V	1	
C5605	EEUFC1E471	E 470UF, 25V	1	
C5606	ECA1CM471	E 470UF, 16V	1	
C5609	ECA1HM220	E 22UF, 50V	1	
C5611	F2A1H331A257	E 330UF, 50V	1	
C5612	ECA1CM471	E 470UF, 16V	1	
C5613	ECJ1VB1E104K	C 0.10UF, K, 25V	1	
C5616	ECJ1VB1E104K	C 0.10UF, K, 25V	1	
C5617	ECA1CM471	E 470UF, 16V	1	
C5618,19	ECJ1VB1E104K	C 0.10UF, K, 25V	2	
C5622	ECA1CM471	E 470UF, 16V	1	
C5623	ECJ1VB1E104K	C 0.10UF, K, 25V	1	
C5626	ECJ1XF1C104Z	C 0.1UF, Z, 16V	1	
C5633	ECA1EM221	E 220UF, 25V	1	
C5637	ECJ1XF1C104Z	C 0.1UF, Z, 16V	1	
C5641-44	ECJ1XF1C104Z	C 0.1UF, Z, 16V	4	
C5645	ECA1CHG470	E 47UF, 16V	1	
C5646	ECJ1VB1H103K	C 0.001UF, K, 50V	1	
		· · ·		
C5647	ECA1CHG470	E 47UF, 16V	1	
C5648	ECJ1VB1H103K	C 0.001UF, K, 50V	1	
C5670	ECJ1VB1E104K	C 0.10UF, K, 25V	1	
C5672	ECA1HHG100	E 10UF, 50V	1	
C5673	ECJ1XF1C104Z	C 0.1UF, Z, 16V	1	
C5685	ECA1HHG100	E 10UF, 50V	1	
C5686	ECJ2XB1H103K	C 0.01UF, K, 50V	1	
C5801,02	EEUFC1E471	E 470UF, 25V	2	
C5804	ECJ1XF1C104Z	C 0.1UF, Z, 16V	1	
C5805	ECJ2VF1C105Z	C 1UF, Z, 16V	1	
C5809	ECJ3XF1E105Z	C 1UF, Z, 25V	1	
C5810	ECA1EHG470	E 47UF, 25V	1	
C6001	F1L2J562A022	C 5600UF, K,6.3V	1	
C6011-16	F2A2T201A001	E 200UF,	6	
C6023	F1L2J562A022	C 5600UF, K,6.3V	1	
C6031	F0C2E405A176	E 0.040UF, 250V	1	
C6041-44	TCUY1C105ZFN	C 1UF, 16V	4	
C6105	F1L1E4750004	C 4.7UF, 25V	1	
			2	
C6111,12 C6132	F2A2D221A022 F1L1E4750004	E 220UF, 200V C 4.7UF, 25V	1	

Ref. No.	Part No.	Part Name & Description	Pcs	Remarks
C6134,35	F1L1E4750004	C 4.7UF, 25V	2	
C6151	ECJ3YB1E105K	C 1UF, K, 25V	1	
C6152-55	F1L1E4750004	C 4.7UF, 25V	4	
C6192	ECJ3YB1E105K	C 1UF, K, 25V	1	
C6194,95	F1L1E4750004	C 4.7UF, 25V	2	
C6201-04	F0C2E405A176	E 0.040UF, 250V	4	
C6211,12	F1L1E4750004	C 4.7UF, 25V	2	
C6213	F2A1E102A220	E 1000UF, 25V	1	
C6221	ECJ2XB1H104K	C 0.1UF, K, 50V	1	
C6241	ECA1EM471	E 470UF, 25V	1	
C6242	TCUY1C105ZFN	C 1UF, 16V	1	
C6243	ECJ2XB1H103K	C 0.01UF, K, 50V	1	
C6251	TCUY1C105ZFN	C 1UF, 16V	1	
C6262,63	F2A2A471A072	E 470UF, 100V	2	
C6272,73	EEUFC1E221	E 220UF, 25V	2	
C6401-03	F1L2J222A022	C 2200UF, K,6.3V	3	
C6411-16	F2A2T201A001	E 200UF,	6	
C6421-24	F1L2J222A022	C 2200UF, K,6.3V	4	
C6431	F0C2E405A176	E 0.040UF, 250V	1	
C6472	ECJ2XB1H104K	· · · · · · · · · · · · · · · · · · ·	1	
C6480	ECJ2XB1H104K	C 0.1UF, K, 50V	1	
C6502		C 0.1UF, K, 50V	1	
	F1L1E4750004 F1L1E4750004	C 4.7UF, 25V C 4.7UF, 25V	2	
C6504,05		<u>'</u>		
C6512-15	F0C2E405A176	E 0.040UF, 250V	4	
C6521	ECJ3YB1E105K	C 1UF, K, 25V	1	
C6522	F1L1E4750004	C 4.7UF, 25V	1	
C6524,25	F1L1E4750004	C 4.7UF, 25V	2	
C6527	F1L1E4750004	C 4.7UF, 25V	1	
C6561	F2A1A1010074	E 100UF, 10V	1	
C6562	TCUY1C105ZFN	C 1UF, 16V	1	
C6563	F2A1A1010074	E 100UF, 10V	1	
C6564	TCUY1C105ZFN	C 1UF, 16V	1	
C6565,66	ECJ2XB1H103K	C 0.01UF, K, 50V	2	
C6581	ECJ3YB1E105K	C 1UF, K, 25V	1	
C6582	TCUY1C105ZFN	C 1UF, 16V	1	
C6592	ECA1EM471	E 470UF, 25V	1	
C6593	ECJ2XC1H102J	C 1000PF, J, 50V	1	
C6601,02	F1L1E4750004	C 4.7UF, 25V	2	
C6603	F1K2J102A014	C 1000UF, K,6.3V	1	
C6604	F2A2V470A020	E 47UF, 350V	1	
C6605	ECJ2XB1H104K	C 0.1UF, K, 50V	1	
C6606	F1K2J102A014	C 1000UF, K,6.3V	1	
C6610	ECJ3YB1E105K	C 1UF, K, 25V	1	
C6611	ECJ2XB1H103K	C 0.01UF, K, 50V	1	
C6612	ECJ3YB1E105K	C 1UF, K, 25V	1	
C6620	ECJ3XB2J222K	C 2200PF, K,630V	1	
C6641	ECQE2105RKB	P 1UF, 250V	1	
C6661,62	F1K2J102A014	C 1000UF, K,6.3V	2	
C6671	F1L1E4750004	C 4.7UF, 25V	1	
C6681,82	F1L1E4750004	C 4.7UF, 25V	2	
C6683	ECJ2XB1H104K	C 0.1UF, K, 50V	1	
C6691	ECA2CM101	E 100UF, 160V	1	
C6701-08	ECJ2XB1H104K	C 0.1UF, K, 50V	8	
C6721	ECA1HM101	E 100UF, 50V	1	

Ref. No.	Part No.	Part Name & Description	Pcs	Remarks
C6723-25	F1L1E4750004	C 4.7UF, 25V	3	
C6726,27	TCUY1C105ZFN	C 1UF, 16V	2	
C6728	ECJ2XC1H102J	C 1000PF, J, 50V	1	
C6752	TCUY1C105ZFN	C 1UF, 16V	1	
C6753	F1L1E4750004	C 4.7UF, 25V	1	
C6754	ECA1VM470	E 47UF, 35V	1	
C6755	ECJ2XB1H104K	C 0.1UF, K, 50V	1	
C6771	TCUY1C105ZFN	C 1UF, 16V	1	
C6772,73	F1L1E4750004	C 4.7UF, 25V	2	
C6775	F1L1E4750004	C 4.7UF, 25V	1	
C6776,77	ECJ2XB1H104K	C 0.1UF, K, 50V	2	
C6791	EEUFC1E221	E 220UF, 25V	1	
C6795,96	EEUFC1E221	E 220UF, 25V	2	
C6801	F2A2E470A022	E 47UF, 250V	1	
C6802	ECQE6223KF	P 0.022UF, K,400V	1	
C6803	ECKD3D221KBP	C 220PF, K, 2KV	1	
C6804	F2A2E100A022	E 10UF, 250V	1	
C6805	ECJ2XC1H102J	C 1000PF, J, 50V	1	
C6806	ECA2CM101	E 100UF, 160V	1	
C6807	ECJ2XC1H471J	C 470PF, J, 50V	1	
C6811	ECJ2XB1H103K	C 0.01UF, K, 50V	1	
C6812	F1L1E4750004	C 4.7UF, 25V	1	
C6813	ECA2CM101	E 100UF, 160V	1	
C6814	ECA1VM151	E 150UF, 35V	1	
C6815	ECJ2XB1H104K	C 0.1UF, K, 50V	1	
C6822	F2A2V100A019	E 10UF, 350V	1	
C6823	ECJ2XB1H103K	C 0.01UF, K, 50V	1	
C6841	ECA2DHG101	E 100UF, 200V	1	
C6842	ECA2CM101	E 100UF, 160V	1	
C6845	ECJ2XB1H103K	C 0.01UF, K, 50V	1	
C6861	TCUY1C105ZFN	C 1UF, 16V	1	
C6862	ECJ3YB1E105K	C 1UF, K, 25V	1	
C6863	ECJ2XB1H103K		1	
C6871	TCUY1C105ZFN	C 0.01UF, K, 50V	1	
		C 1UF, 16V		
C6872 C6873	ECJ3YB1E105K ECJ2XB1H103K	C 1UF, K, 25V	1	
		C 0.01UF, K, 50V		
C6901	ECJ2XB1H102K	C 1000PF, K, 50V	1	
C6902	TCUY1C105ZFN	C 1UF, 16V	1	
C6904	TCUY1C105ZFN	C 1UF, 16V	1	
C6906	TCUY1C105ZFN	C 1UF, 16V	1	
C6908	TCUY1C105ZFN	C 1UF, 16V	1	
C6910	TCUY1C105ZFN	C 1UF, 16V	1	
C6912	TCUY1C105ZFN	C 1UF, 16V	1 -	
C6914-18	ECJ2XB1H221K	C 220PF, K, 50V	5	
C6931	ECJ2XB1H102K	C 1000PF, K, 50V	1	
C6932-35	F1L2E105A013	E 0.10UF, 25V	4	
C6951	ECJ2XB1H102K	C 1000PF, K, 50V	1	
C6952	TCUY1C105ZFN	C 1UF, 16V	1	
C6955	TCUY1C105ZFN	C 1UF, 16V	1	
C6957,58	TCUY1C105ZFN	C 1UF, 16V	2	
C6961	TCUY1C105ZFN	C 1UF, 16V	1	
C6963	TCUY1C105ZFN	C 1UF, 16V	1	
C6964-68	ECJ2XB1H221K	C 220PF, K, 50V	5	
C6981	ECJ2XB1H102K	C 1000PF, K, 50V	1	

Ref. No.	Part No.	Part Name & Description	Pcs	Remarks
C6982-85	F1L2E105A013	E 0.10UF, 25V	4	
C7103	ECJ3XB2A474K	C 0.47UF, 6.3V	1	
C7105	TCUY1C105ZFN	C 1UF, 16V	1	
C7106	ECJ3XB2A474K	C 0.47UF, 6.3V	1	
C7108	ECJ1XC1H101J	C 100PF, J, 50V	1	
C7109	TCUY1C105ZFN	C 1UF, 16V	1	
C7112	ECJ3XB2A474K	C 0.47UF, 6.3V	1	
C7114	TCUY1C105ZFN	C 1UF, 16V	1	
C7115	ECJ3XB2A474K	C 0.47UF, 6.3V	1	
C7117	ECJ1XC1H101J	C 100PF, J, 50V	1	
C7118	TCUY1C105ZFN	C 1UF, 16V	1	
C7121	ECJ3XB2A474K	C 0.47UF, 6.3V	1	
C7123	TCUY1C105ZFN	C 1UF, 16V	1	
C7124	ECJ3XB2A474K	C 0.47UF, 6.3V	1	
C7126	ECJ1XC1H101J	C 100PF, J, 50V	1	
C7127,28	TCUY1C105ZFN	C 1UF, 16V	2	
C7130	ECJ1XB1C104K	C 0.1UF, Z, 16V	1	
C7201-03	TCUY1C105ZFN	C 1UF, 16V	3	
C7205	ECJ1XB1C104K	C 0.1UF, Z, 16V	1	
C7206	TCUY1C105ZFN	C 1UF, 16V	1	
C7208	ECJ1XB1C104K	C 0.1UF, Z, 16V	1	
C7210	ECJ1XB1C104K	C 0.1UF, Z, 16V	1	
C7213	ECJ1XC1H101J	C 100PF, J, 50V	1	
C7215	TCUY1C105ZFN	C 1UF, 16V	1	
C7216	ECJ1XB1C104K	C 0.1UF, Z, 16V	1	
C7218	ECJ1XB1C104K	C 0.1UF, Z, 16V	1	
C7221,22	ECJ1XC1H101J	C 100PF, J, 50V	2	
C7225	ECJ1XC1H101J	C 100PF, J, 50V	1	
C7226	ECJ3XB2A474K	C 0.47UF, 6.3V	1	
C7228	TCUY1C105ZFN	C 1UF, 16V	1	
C7229,30	ECJ3XB2A474K	C 0.47UF, 6.3V	2	
C7232	TCUY1C105ZFN	C 1UF, 16V	1	
C7233,34	ECJ3XB2A474K	C 0.47UF, 6.3V	2	
C7236	TCUY1C105ZFN	C 1UF, 16V	1	
C7237,38	ECJ3XB2A474K	C 0.47UF, 6.3V	2	
C7240	TCUY1C105ZFN	C 1UF, 16V	1	
C7241	ECJ3XB2A474K	C 0.47UF, 6.3V	1	
C7243	ECJ1XB1C104K	C 0.1UF, Z, 16V	1	
C7247	ECJ1XB1C104K	C 0.1UF, Z, 16V	1	
C7249	ECJ1XB1C104K	C 0.1UF, Z, 16V	1	
C7251	ECJ1XB1C104K	C 0.1UF, Z, 16V	1	
C7302	ECJ1XB1C104K	C 0.1UF, Z, 16V	1	
C7306,07	ECJ1XB1C104K	C 0.1UF, Z, 16V	2	
C7309,10	ECJ1XB1C104K	C 0.1UF, Z, 16V	2	
C7311,12	TCUY1C105ZFN	C 1UF, 16V	2	
C7311,12	ECJ1XC1H101J	C 100PF, J, 50V	3	
C7316,17	TCUY1C105ZFN	C 1UF, 16V	2	
C7318,17	ECJ1XC1H101J	C 100PF, J, 50V	1	
			1	
C7319	ECJ3XB2A474K	C 0.47UF, 6.3V		
C7321	TCUY1C105ZFN	C 1UF, 16V	1	
C7322	ECJ3XB2A474K	C 0.47UF, 6.3V	1	
C7331	ECJ3XB2A474K	C 0.47UF, 6.3V	1	
C7333	TCUY1C105ZFN	C 1UF, 16V	1	
C7334,35	ECJ3XB2A474K	C 0.47UF, 6.3V	2	

Ref. No.	Part No.	Part Name & Description	Pcs	Remarks
C7337	TCUY1C105ZFN	C 1UF, 16V	1	
C7338,39	ECJ3XB2A474K	C 0.47UF, 6.3V	2	
C7341	TCUY1C105ZFN	C 1UF, 16V	1	
C7342	ECJ3XB2A474K	C 0.47UF, 6.3V	1	
C7403	ECJ3XB2A474K	C 0.47UF, 6.3V	1	
C7405	TCUY1C105ZFN	C 1UF, 16V	1	
C7406	ECJ3XB2A474K	C 0.47UF, 6.3V	1	
C7407	ECJ1XC1H101J	C 100PF, J, 50V	1	
C7408	TCUY1C105ZFN	C 1UF, 16V	1	
C7411	ECJ3XB2A474K	C 0.47UF, 6.3V	1	
C7413	TCUY1C105ZFN	C 1UF, 16V	1	
C7414	ECJ3XB2A474K	C 0.47UF, 6.3V	1	
C7415	ECJ1XC1H101J	C 100PF, J, 50V	1	
C7416	TCUY1C105ZFN	C 1UF, 16V	1	
C7419	ECJ3XB2A474K	C 0.47UF, 6.3V	1	
C7421	TCUY1C105ZFN	C 1UF, 16V	1	
C7422	ECJ3XB2A474K	C 0.47UF, 6.3V	1	
C7423	ECJ1XC1H101J	C 100PF, J, 50V	1	
C7424	TCUY1C105ZFN	C 1UF, 16V	1	
C7427	ECJ3XB2A474K	C 0.47UF, 6.3V	1	
C7429	TCUY1C105ZFN	C 1UF, 16V	1	
C7430	ECJ3XB2A474K	C 0.47UF, 6.3V	1	
C7431	ECJ1XC1H101J	C 100PF, J, 50V	1	
C7432,33	TCUY1C105ZFN	C 1UF, 16V	2	
C7435	ECJ1XB1C104K	C 0.1UF, Z, 16V	1	
C7440-43	ECJ1XB1C104K	C 0.1UF, Z, 16V	4	
C7502	TCUY1C105ZFN	C 1UF, 16V	1	
C7504	TCUY1C105ZFN	C 1UF, 16V	1	
C7506	ECJ1XB1C104K	C 0.1UF, Z, 16V	1	
C7508	ECJ1XB1C104K	C 0.1UF, Z, 16V	1	
C7509	ECJ1XC1H101J	C 100PF, J, 50V	1	
C7510	TCUY1C105ZFN	C 1UF, 16V	1	
C7511	ECJ1XC1H101J	C 100PF, J, 50V	1	
C7513,14	ECJ1XB1C104K	C 0.1UF, Z, 16V	2	
C7517	ECJ1XB1C104K	C 0.1UF, Z, 16V	1	
C7518	TCUY1C105ZFN	C 1UF, 16V	1	
C7521	ECJ1XC1H101J	C 100PF, J, 50V	1	
C7523	ECJ1XB1C104K	C 0.1UF, Z, 16V	1	
C7524	ECJ1XC1H101J	C 100PF, J, 50V	1	
C7525	ECJ3XB2A474K	C 0.47UF, 6.3V	1	
C7527	TCUY1C105ZFN	C 1UF, 16V	1	
C7528,29	ECJ3XB2A474K	C 0.47UF, 6.3V	2	
C7531	TCUY1C105ZFN	C 1UF, 16V	1	
C7532,33	ECJ3XB2A474K	C 0.47UF, 6.3V	2	
C7535	TCUY1C105ZFN	C 1UF, 16V	1	
C7536	ECJ3XB2A474K	C 0.47UF, 6.3V	1	
C7557	ECJ3XB2A474K	C 0.47UF, 6.3V	1	
C7559	TCUY1C105ZFN	C 1UF, 16V	1	
C7560	ECJ3XB2A474K	C 0.47UF, 6.3V	1	
C7562	ECJ3XB2A474K ECJ1XB1C104K	C 0.1UF, Z, 16V	1	
C7564	ECJ1XB1C104K	C 0.1UF, Z, 16V	1	
C7566	ECJ1XB1C104K	C 0.1UF, Z, 16V	1	
	ECJ3XB2A474K		1	
C7603	EUUJABZA414N	C 0.47UF, 6.3V C 1UF, 16V	1	

Ref. No.	Part No.	Part Name & Description	Pcs	Remarks
C7606	ECJ3XB2A474K	C 0.47UF, 6.3V	1	
C7607	ECJ1XC1H101J	C 100PF, J, 50V	1	
C7608	TCUY1C105ZFN	C 1UF, 16V	1	
C7611	ECJ3XB2A474K	C 0.47UF, 6.3V	1	
C7613	TCUY1C105ZFN	C 1UF, 16V	1	
C7614	ECJ3XB2A474K	C 0.47UF, 6.3V	1	
C7615	ECJ1XC1H101J	C 100PF, J, 50V	1	
C7616	TCUY1C105ZFN	C 1UF, 16V	1	
C7619	ECJ3XB2A474K	C 0.47UF, 6.3V	1	
7621	TCUY1C105ZFN	C 1UF, 16V	1	
C7622	ECJ3XB2A474K	C 0.47UF, 6.3V	1	
C7623	ECJ1XC1H101J	C 100PF, J, 50V	1	
C7624,25	TCUY1C105ZFN	C 1UF, 16V	2	
C7626	ECJ1XB1C104K	C 0.1UF, Z, 16V	1	
C7701	ECJ1XC1H330J	C 33PF, J, 50V	1	
C7702	EEEHB0G470R	C 47PF, J, 4V	1	
C7703,04	ECJ1XC1H330J	C 33PF, J, 50V	2	
C7705	ECJ1XF1C104Z	C 0.1UF, Z, 16V	1	
C7707	ECJ1XF1C104Z	C 0.1UF, Z, 16V	1	
C7708	ECJ1VB1H103K	C 0.001UF, K, 50V	1	
C7709	ECJ1XF1C104Z	C 0.1UF, Z, 16V	1	
C7711	ECJ1XC1H330J	C 33PF, J, 50V	1	
C7721,22	ECJ1XF1C104Z	C 0.1UF, Z, 16V	2	
C7751	EEVHB0G221P	E 220UF, 4V	1	
C7755	ECJ1XF1C104Z	C 0.1UF, Z, 16V	1	
7756	ECJ2FB1A105K	C 1UF, K, 10V	1	
C7758	ECJ1XF1C104Z	C 0.1UF, Z, 16V	1	
C7760	ECJ2FB1A105K	C 1UF, K, 10V	1	
C7761-64	ECJ1XC1H330J	C 33PF, J, 50V	4	
C8001	ECJ0EB1C103K	C0.010UF, K, 16V	1	TH-50PX600B
C8002	ECJ0EB1A104K	C 0.1UF, K, 10V	1	TH-50PX600B
C8003	ECJ0EB1C103K	C0.010UF, K, 16V	1	TH-50PX600B
C8004	ECJ0EB1A104K	C 0.1UF, K, 10V	1	TH-50PX600B
C8005	EEEHB1C100R	C 10PF, J, 16V	1	TH-50PX600B
C8007	ECJ0EB1H102K	C 1000PF, K, 50V	1	TH-50PX600B
C8015	ECJ1VC1H080C	C 8PF, C, 50V	1	TH-50PX600B
C8019,20	ECJ0EB1C103K	C0.010UF, K, 16V	2	TH-50PX600B
C8021	ECJ0EB1H102K	C 1000PF, K, 50V	1	TH-50PX600B
C8030	ECJ0EB1C103K	C0.010UF, K, 16V	1	TH-50PX600B
C8034,35	ECJ0EF1C104Z	C 0.10UF, Z, 16V	2	TH-50PX600B
C8037	ECJ0EB1C103K	C0.010UF, K, 16V	1	TH-50PX600B
C8039,40	ECJ0EB1C103K	C0.010UF, K, 16V	2	TH-50PX600B
C8041	EEEHB0G101R	C 100PF, J, 4V	1	TH-50PX600B
C8042,43	ECJ1VC1H100C	C 100FF, S, 4V	2	TH-50PX600B
C8042,43	ECJ0EB1C103K	C0.010UF, K, 16V	3	TH-50PX600B
C8051,52	ECJ0EB1C103K	C0.010UF, K, 16V	2	TH-50PX600B
C8051,52	F2G0J470A019	E 47UF 6.3V	1	TH-50PX600B
C8056			1	
	ECJ0EB1C103K	C0.010UF, K, 16V	4	TH-50PX600B
C8058-61	ECJ0EB1C103K	C0.010UF, K, 16V		TH-50PX600B
C8062	F1G1A1540001	C 0.15UF, K, 10V	1	TH-50PX600B PAVCCZ
C8071	ECJ0EC1H270J	C 270PF, K, 50V	1	TH-50PX600B
C8073	ECJ0EC1H270J	C 270PF, K, 50V	1	TH-50PX600B
C8098	ECGRL0G680ER	C 68PF, J, 4V	1	TH-50PX600B

Ref. No.	Part No.	Part Name & Description	Pcs	Remarks
C8101,02	ECJ1VB0J105K	C 1UF, K, 6.3V	2	TH-50PX600B
C8103,04	ECJ0EB1A104K	C 0.1UF, K, 10V	2	TH-50PX600B
C8105	EEEHB0G101R	C 100PF, J, 4V	1	TH-50PX600B
C8106,07	ECJ1VB0J105K	C 1UF, K, 6.3V	2	TH-50PX600B
C8108	ECJ0EB1A104K	C 0.1UF, K, 10V	1	TH-50PX600B
C8109	EEEHB0G101R	C 100PF, J, 4V	1	TH-50PX600B
C8110	ECJ0EB1A104K	C 0.1UF, K, 10V	1	TH-50PX600B
C8121	ECJ0EB1A104K	C 0.1UF, K, 10V	1	TH-50PX600B
C8128,29	ECJ0EB1C103K	C0.010UF, K, 16V	2	TH-50PX600B
C8134	ECJ0EB1C103K	C0.010UF, K, 16V	1	TH-50PX600B
C8135	ECJ0EB1A473K	C 0.047UF, K, 10V	1	TH-50PX600B
C8136	ECGRL0G680ER	C 68PF, J, 4V	1	TH-50PX600B
C8138	ECJ0EB1C103K	C0.010UF, K, 16V	1	TH-50PX600B
C8139	ECGRL0G680ER	C 68PF, J, 4V	1	TH-50PX600B
C8140	ECJ0EB1A104K	C 0.1UF, K, 10V	1	TH-50PX600B
C8141	ECJ0EB1C103K	C0.010UF, K, 16V	1	TH-50PX600B
C8142	ECJ0EB1A104K	C 0.1UF, K, 10V	1	TH-50PX600B
C8143	ECJ0EB1C103K	C0.010UF, K, 16V	1	TH-50PX600B
C8144	ECJ0EB1A104K	C 0.1UF, K, 10V	1	TH-50PX600B
C8145	ECJ0EB1C103K	C0.010UF, K, 16V	1	TH-50PX600B
C8146	ECJ0EB1A104K	C 0.1UF, K, 10V	1	TH-50PX600B
C8147	ECJ0EB1C103K	C0.010UF, K, 16V	1	TH-50PX600B
C8148	ECJ0EB1A104K	C 0.1UF, K, 10V	1	TH-50PX600B
C8149	ECJ1VB0J105K	C 1UF, K, 6.3V	1	TH-50PX600B
C8150	ECJ0EB1C103K	C0.010UF, K, 16V	1	TH-50PX600B
C8151	ECJ0EB1A104K	C 0.1UF, K, 10V	1	TH-50PX600B
C8154-56	ECJ0EB1A104K	C 0.1UF, K, 10V	3	TH-50PX600B
C8157	ECJ0EB1C103K	C0.010UF, K, 16V	1	TH-50PX600B
C8160	ECJ0EB1A104K	C 0.1UF, K, 10V	1	TH-50PX600B
C8161-64	ECJ0EB1C103K	C0.010UF, K, 16V	4	TH-50PX600B
C8165	ECJ0EB1A104K	C 0.1UF, K, 10V	1	TH-50PX600B
C8166	ECJ0EB1C103K	C0.010UF, K, 16V	1	TH-50PX600B
C8167	ECJ0EB1A104K		1	TH-50PX600B
C8168	ECJ0EB1C103K	C 0.1UF, K, 10V C0.010UF, K, 16V	1	TH-50PX600B
		· · ·	1	
C8169 C8170	EEEHB0G470R ECJ0EF1C104Z	C 47PF, J, 4V	1	TH-50PX600B TH-50PX600B
		C 0.10UF, Z, 16V		
C8171	ECJ0EB1A104K	C 0.1UF, K, 10V	1	TH-50PX600B
C8172	EEEHB0G470R	C 47PF, J, 4V	1	TH-50PX600B
C8173-75	ECJ0EB1C103K	C0.010UF, K, 16V	3	TH-50PX600B
C8176	ECJ0EF1C104Z	C 0.10UF, Z, 16V	1	TH-50PX600B
C8182	ECJ0EC1H121J	C 120PF, K, 50V	1	TH-50PX600B
C8186	ECJ0EC1H680J	C 680PF, K, 50V	1	TH-50PX600B
C8189	ECJ0EF1C104Z	C 0.10UF, Z, 16V	1	TH-50PX600B
C8193	EEEHB0J101P	C 100PF, J, 6.3V	1	TH-50PX600B
C8202,03	EEEHB1C470P	C 47PF, J, 16V	2	TH-50PX600B
C8204	ECJ3XB1C106M	C 1.0UF, K, 16V	1	TH-50PX600B
C8205,06	ECJ0EB1A104K	C 0.1UF, K, 10V	2	TH-50PX600B
C8207	EEEHB1C470P	C 47PF, J, 16V	1	TH-50PX600B
C8208	ECJ3XB1C106M	C 1.0UF, K, 16V	1	TH-50PX600B
C8210	ECJ0EB1A333K	C 0.033UF, K, 10V	1	TH-50PX600B
C8212	ECJ0EB1C223K	C 0.022UF, K, 16V	1	TH-50PX600B
C8240	ECJ1VB0J105K	C 1UF, K, 6.3V	1	TH-50PX600B
C8268	ECJ1VB0J105K	C 1UF, K, 6.3V	1	TH-50PX600B
C8269	ECJ0EB1A104K	C 0.1UF, K, 10V	1	TH-50PX600B

Ref. No.	Part No.	Part Name & Description	Pcs	Remarks
C8303	ECJ0EB1C103K	C0.010UF, K, 16V	1	TH-50PX600B
C8305,06	ECJ0EB1C103K	C0.010UF, K, 16V	2	TH-50PX600B
C8314	ECJ0EF1C104Z	C 0.10UF, Z, 16V	1	TH-50PX600B
C8315	ECJ2FF1A475Z	C 4.7UF, Z, 10V	1	TH-50PX600B
C8317,18	ECJ2FF1A475Z	C 4.7UF, Z, 10V	2	TH-50PX600B
C8319	ECJ0EF1C104Z	C 0.10UF, Z, 16V	1	TH-50PX600B
C8320-23	ECJ1VB0J105K	C 1UF, K, 6.3V	4	TH-50PX600B
C8327	F2G0J470A019	E 47UF 6.3V	1	TH-50PX600B
C8329	ECJ0EB1C103K	C0.010UF, K, 16V	1	TH-50PX600B
28330,31	ECJ0EC1H181J	C 180PF, K, 50V	2	TH-50PX600B
28332	ECJ0EB1C103K	C0.010UF, K, 16V	1	TH-50PX600B
C8334,35	ECJ0EC1H330J	C 330PF, K, 50V	2	TH-50PX600B
C8340	ECJ0EB1C682K	C 6800UF, K, 16V	1	TH-50PX600B
C8341	ECJ0EB1C822K	C 8200UF, K, 16V	1	TH-50PX600B
C8342,43	ECGRL0G680ER	C 68PF, J, 4V	2	TH-50PX600B
28344	ECJ1VB1H332K	C 3300PF, K, 50V	1	TH-50PX600B
28345	ECJ0EB1C153K	C 0.015UF, K, 16V	1	TH-50PX600B
C8349	ECJ0EB1A104K	C 0.1UF, K, 10V	1	TH-50PX600B
C8350,51	ECJ0EF1C104Z	C 0.10UF, Z, 16V	2	TH-50PX600B
C8361	EEEHB1C470P	C 47PF, J, 16V	1	TH-50PX600B
C8372	ECJ0EB1A104K	C 0.1UF, K, 10V	1	TH-50PX600B
C8376	ECJ0EB1A104K	C 0.1UF, K, 10V	1	TH-50PX600B
C8397	ECJ0EB1A104K	C 0.1UF, K, 10V	1	TH-50PX600B
C8401	ECJ0EB1C103K	C0.010UF, K, 16V	1	TH-50PX600B
	ECJ0EF1C104Z		2	TH-50PX600B
28403,04		C 0.10UF, Z, 16V		
C8406	ECJ0EF1C104Z	C 0.10UF, Z, 16V	1	TH-50PX600B
C8409	ECJ0EF1C104Z	C 0.10UF, Z, 16V	1	TH-50PX600B
C8410	ECJ0EB1A104K	C 0.1UF, K, 10V	1	TH-50PX600B
28413,14	ECJ0EF1C104Z	C 0.10UF, Z, 16V	2	TH-50PX600B
28416,17	ECJ0EF1C104Z	C 0.10UF, Z, 16V	2	TH-50PX600B
C8419	ECJ0EF1C104Z	C 0.10UF, Z, 16V	1	TH-50PX600B
C8421	ECJ0EB1C103K	C0.010UF, K, 16V	1	TH-50PX600B
C8423	ECJ0EB1A104K	C 0.1UF, K, 10V	1	TH-50PX600B
C8424	ECJ0EF1C104Z	C 0.10UF, Z, 16V	1	TH-50PX600B
C8425	ECJ0EB1A104K	C 0.1UF, K, 10V	1	TH-50PX600B
C8427	F2G1A101A019	E 100UF, 10V	1	TH-50PX600B
C8428	ECJ0EF1C104Z	C 0.10UF, Z, 16V	1	TH-50PX600B
C8430-32	ECJ0EF1C104Z	C 0.10UF, Z, 16V	3	TH-50PX600B
C8433,34	ECJ0EB1C103K	C0.010UF, K, 16V	2	TH-50PX600B
C8467	ECJ0EB1C103K	C0.010UF, K, 16V	1	TH-50PX600B
C8501,02	ECJ0EC1H180J	C 180PF, K, 50V	2	TH-50PX600B
C8504	ECJ1VF1A105Z	C 1UF, Z, 10V	1	TH-50PX600B
C8506	ECJ2VF1C105Z	C 1UF, Z, 16V	1	TH-50PX600B
C8507	ECJ1XC1H102J	C 1000PF, J, 50V	1	TH-50PX600B
C8508	ECJ1XF1C334Z	C 0.33UF, Z, 16V	1	TH-50PX600B
C8509	EEEHB0J101P	C 100PF, J, 6.3V	1	TH-50PX600B
C8870	ECJ1XC1H471J	C 470PF, J, 50V	1	TH-50PX600B
C8872	ECJ2FB0J225K	C 2.2UF, Z, 16V	1	TH-50PX600B
C8910	ECJ0EB1C103K	C0.010UF, K, 16V	1	TH-50PX600B
C9028,29	F1J0J1060004	C 0.010UF, K, 16V	2	
C9033,34	ECJ1XF1C104Z	C 0.1UF, Z, 16V	2	
C9035,36	F1J0J1060004	C 0.010UF, K, 16V	2	
C9037	ECJ1VB1H103K	C 0.001UF, K, 50V	1	
C9037	F1J0J1060004	C 0.010UF, K, 16V	1	

Ref. No.	Part No.	Part Name & Description	Pcs	Remarks
C9040	ECJ1XF1C104Z	C 0.1UF, Z, 16V	1	
C9044-53	ECJ1XF1C104Z	C 0.1UF, Z, 16V	10	
C9055-57	ECJ1XF1C104Z	C 0.1UF, Z, 16V	3	
C9058	F1J0J1060004	C 0.010UF, K, 16V	1	
C9300-25	ECJ1XB1C104K	C 0.1UF, Z, 16V	26	
C9327-51	ECJ1XB1C104K	C 0.1UF, Z, 16V	25	
C9352	EEFCD0G560ER	56UF,	1	
C9355-59	ECJ1XB1C104K	C 0.1UF, Z, 16V	5	
C9360-64	ECJ3XB0J106M	C 10UF, M,6.3V	5	
C9365	EEFCD0G560ER	56UF,	1	
C9366,67	ECJ1VF1H103Z	C 0.010UF, Z, 50V	2	
C9368	ECJ1XB1C104K	C 0.1UF, Z, 16V	1	
C9442-70	ECJ1XB1C104K	C 0.1UF, Z, 16V	29	
C9472-96	ECJ1XB1C104K	C 0.1UF, Z, 16V	25	
C9497	EEFCD0G560ER	56UF,	1	
C9512,13	ECJ1XB1C104K	C 0.1UF, Z, 16V	2	
C9514,15	ECJ2VF1C105Z	C 1UF, Z, 16V	2	
C9516-25	ECJ1XB1C104K	C 0.1UF, Z, 16V	10	
C9526	F1J0J1060004	C 0.010UF, K, 16V	1	
C9527-30	ECJ1XB1C104K	C 0.1UF, Z, 16V	4	
C9531	F1J0J1060004	C 0.010UF, K, 16V	1	
C9532	ECJ1XC1H101K	C 100PF, K, 50V	1	
C9533	ECJ1XB1C104K	C 0.1UF, Z, 16V	1	
C9534-38	ECJ3XB0J106M	C 10UF, M,6.3V	5	
C9539	EEFCD0G560ER	56UF,	1	
C9540,41	ECJ1VF1H103Z	C 0.010UF, Z, 50V	2	
C9542	ECJ1XB1C104K	C 0.1UF, Z, 16V	1	
C9546,47	ECJ1VC1H120J		2	
C9546,47 C9548		C 12PF, J, 50V	1	
	ECJ1XB1C104K	C 0.1UF, Z, 16V	1	
C9552	ECJ1XB1C104K	C 0.1UF, Z, 16V		
C9554	F1J0J1060004	C 0.010UF, K, 16V	1	
C9557	ECJ2VF1C105Z	C 1UF, Z, 16V	1	
C9601	ECJ1XF1C104Z	C 0.1UF, Z, 16V	1	
C9608	ECJ1XF1C104Z	C 0.1UF, Z, 16V	1	
C9800	ECJ1XB1C104K	C 0.1UF, Z, 16V	1	
C9801	ECJ1VB1H472K	C 4700PF, K, 50V	1	
C9802	ECJ1XC1H470J	C 47PF, J, 50V	1	
C9803	ECJ1VB1H472K	C 4700PF, K, 50V	1	
C9804	ECJ1XB1C104K	C 0.1UF, Z, 16V	1	
C9805	ECJ1VB0J475K	C 4.7UF, K, 6.3V	1	
C9806	ECGRL0G680ER	C 68PF, J, 4V	1	
C9807,08	ECJ3YB1E106M	C 10 UF, K, 25V	2	
C9809	ECJ1XB1C104K	C 0.1UF, Z, 16V	1	
C9815,16	ECGRL0G680ER	C 68PF, J, 4V	2	
C9817,18	ECJ3YB1E106M	C 10 UF, K, 25V	2	
C9822	F1J0J1060004	C 0.010UF, K, 16V	1	
C9823,24	ECJ3YB1E106M	C 10 UF, K, 25V	2	
C9825	ECJ1XC1H101K	C 100PF, K, 50V	1	
C9826	ECJ1XF1C104Z	C 0.1UF, Z, 16V	1	
C9827	F1J0J1060004	C 0.010UF, K, 16V	1	
C9830-32	ECJ3XB1C106M	C 1.0UF, K, 16V	3	
C9833	ECJ3YB1E106M	C 10 UF, K, 25V	1	
C9837	ECJ3XB1C106M	C 1.0UF, K, 16V	1	
C9838	ECJ1XF1C104Z	C 0.1UF, Z, 16V	1	

Ref. No.	Part No.	Part Name & Description	Pcs	Remarks
C9840	ECJ1XF1C104Z	C 0.1UF, Z, 16V	1	
C9841,42	ECJ2VF1C105Z	C 1UF, Z, 16V	2	
C9843	ECJ1XF1C104Z	C 0.1UF, Z, 16V	1	
C9844	ECJ1VF1H103Z	C 0.010UF, Z, 50V	1	
C9845,46	ECJ1XF1C104Z	C 0.1UF, Z, 16V	2	
C9847,48	ECJ1VB1E104K	C 0.10UF, K, 25V	2	
C9880,81	ECJ1XB1H102K	C 1000UF, Z, 50V	2	
C9882	ECJ1XB1C104K	C 0.1UF, Z, 16V	1	
C9883	ECJ1VB1H822K	C 8200PF, K, 50V	1	
C9884	ECJ1VC1H100C	C 10PF, C, 50V	1	
C9885	ECJ1XB1H102K	C 1000UF, Z, 50V	1	
C9886	ECJ1XB1C104K	C 0.1UF, Z, 16V	1	
C9887	ECJ1VB0J475K	C 4.7UF, K, 6.3V	1	
C9891	ECJ1XB1C104K	C 0.1UF, Z, 16V	1	
C9896	ECJ1XB1C104K	C 0.1UF, Z, 16V	1	
C9897	ECJ1VB1H822K	C 8200PF, K, 50V	1	
C9898	ECJ1VC1H100C	C 10PF, C, 50V	1	
C9899	ECJ1XB1H102K	C 1000UF, Z, 50V	1	
C9926	ECJ1XB1C104K	C 0.1UF, Z, 16V	1	
C9967	ECJ1VB0J475K	C 4.7UF, K, 6.3V	1	
C9971	ECJ1XB1C104K	C 0.1UF, Z, 16V	1	
CA1-11	K1MN68BA0002	68P CONNECTOR	11	
CB1-11	K1MN68BA0002	68P CONNECTOR	11	
D3	K1KY40B00003	40P CONNECTOR	1	
D5	K1KB31BA0064	31P CONNECTOR	1	
D6	K1KA21A00011	21P CONNECTOR	1	
D20	K1KA20BA0296	20P CONNECTOR	1	
D25	K1KA20AA0009	20P CONNECTOR	1	
D31	K1MN80BA0076	80P CONNECTOR	1	
D32	K1MN55BA0076	55P CONNECTOR	1	
D33	K1MN68BA0076	68P CONNECTOR	1	
D34	K1MN80BA0076	80P CONNECTOR	1	
D1106,07	MA729	DIODE	2	
D1117	MA3036L	ZENER DIODE	1	
D1119	MA704A	DIODE	1	
D1121	MA729	DIODE	1	
D2011-14	MA111	DIODE	4	
D2119	B0BC01100001	ZENER DIODE	1	
D2300,01	MA111	DIODE	2	
D2303,04	MA111	DIODE	2	
D2308	MA152	DIODE	1	
D2309	MA111	DIODE	1	
D2510,11	MA8056-M	ZENER DIODE	2	
D2512	MA8043LTX	ZENER DIODE	1	
D2520B	LN1271RALTR	LED	1	
D2524	MA8056-M	ZENER DIODE	1	
D2525B	LN1471YTR	LED	1	TH-50PX600B
D2526	MA8056-M	ZENER DIODE	1	TH-50PX600B
D3002-12	MA8140M	ZENER DIODE	11	
D3015,16	MA8140M	ZENER DIODE	2	
D3021-23	MA111	DIODE	3	

Ref. No.	Part No.	Part Name & Description	Pcs	Remarks
D3024	B0BC01100001	ZENER DIODE	1	
D3025	MA8140M	ZENER DIODE	1	
D3027,28	MA8140M	ZENER DIODE	2	
D3030-32	MA8140M	ZENER DIODE	3	
D3038-43	MA8140M	ZENER DIODE	6	
D3044	MA111	DIODE	1	
D3100	MA8140M	ZENER DIODE	1	
D3334-39	MA111	DIODE	6	
D3702	MA8140M	ZENER DIODE	1	
D4019-38	EZJZ0V80008B	VARISTOR	20	
D4041	EZJZ0V80008B	VARISTOR	1	
D4044,45	EZJZ0V80008B	VARISTOR	2	
D4047,48	MA3056M	ZENER DIODE	2	
D4049-52	B0HCMM000014	DIODE	4	
D5606	B0BC01100001	ZENER DIODE	1	
D5607	B0BC6R600005	ZENER DIODE	1	
D5610	B0BC4R700007	ZENER DIODE	1	(PA)
D5610	MA3X78900L	ZENER DIODE	1	(H)
D5612	B0BC3R700006	ZENER DIODE	1	
D5618	B0BC03900015	ZENER DIODE	1	
D5634	MA111	DIODE	1	
D5635	MA3047H	ZENER DIODE	1	
D5637,38	MA152	DIODE	2	
D5639	MA3047H	ZENER DIODE	1	
D5640	MA3039H	ZENER DIODE	1	
D5641	MA152	DIODE	1	
D5642	MA3120M	ZENER DIODE	1	
D5643	MA152	DIODE	1	
D5644	MA3068M	ZENER DIODE	1	
D5646,47	MA152	DIODE	2	
D5649	MA111	DIODE	1	
D5801	B0JCME000037	DIODE	1	
D5804	MA3120M	ZENER DIODE	1	
D5805,06	MA152	DIODE	2	
D5807	MA111	DIODE	1	
D6001	B0HBSN000008	DIODE	1	
D6021,22	B0HBSN000008	DIODE	2	
D6032	MA111	DIODE	1	
D6041	B0ECHP000003	DIODE	1	
D6051	B0ECHP000003	DIODE	1	
D6061,62	B0HBSN000008	DIODE	2	
D6071,72	B0HBSN000008	DIODE	2	
D6081,82	B0HBSN000008	DIODE	2	
D6091	B0HBSN000008	DIODE	1	
D6092	B0ECHP000003	DIODE	1	
D6101-04	B0JCME000037	DIODE	4	
D6105	MA111	DIODE	1	
D6131,32	B0ECHP000003	DIODE	2	
D6151-54	B0ECHP000003	DIODE	4	
D6191-93	B0ECHP000003	DIODE	3	
D6211	B0JCME000037	DIODE	1	
D6212	B0ECHP000003	DIODE	1	
D6221	B0ECHP000003	DIODE	1	
D6222,23	MA111	DIODE	2	

Ref. No.	Part No.	Part Name & Description	Pcs	Remarks
D6251,52	MA8330M	ZENER DIODE	2	
D6253	LNJ301MPUJA	LED	1	
D6254	MA8051L	ZENER DIODE	1	
D6255	MA111	DIODE	1	
D6401	B0HBSN000008	DIODE	1	
D6404	B0HBSN000008	DIODE	1	
D6431,32	B0HBSP000019	DIODE	2	
D6441	B0ECHP000003	DIODE	1	
D6451	B0ECHP000003	DIODE	1	
D6461,62	B0HBSN000008	DIODE	2	
D6466	MA111	DIODE	1	
D6471	B0HBSN000008	DIODE	1	
D6472	B0ECHP000003	DIODE	1	
D6477	MA111	DIODE	1	
D6478	B0HCKS000002	DIODE	1	
D6480	MA111	DIODE	1	
D6481,82	B0HBSN000008	DIODE	2	
D6491	B0HBSP000019	DIODE	1	
D6497	MA111	DIODE	1	
D6501,02	B0ECHP000003	DIODE	2	
D6521-24	B0ECHP000003	DIODE	4	
D6581,82	MA8330M	ZENER DIODE	2	
D6583	LNJ301MPUJA	LED	1	
D6584	MA8051L	ZENER DIODE	1	
D6585	MA111	DIODE	1	
D6601	MA8240M	ZENER DIODE	1	
D6602	B0ECHP000003	DIODE	1	
D6603	MA8240M	ZENER DIODE	1	
D6604	MA111	DIODE	1	
D6605	MA8051L	ZENER DIODE	1	
D6606	B0HCMM000014	DIODE	1	
D6607	MA111	DIODE	1	
			1	
D6610	MAZ81500ML	ZENER DIODE		
D6611-14	MA111	DIODE	4	
D6619,20	B0HCKS000002	DIODE	2	
D6621-24	B0HDSM000005	DIODE	4	
D6641,42	B0HCKS000002	DIODE	2	
D6643	MA111	DIODE	1	
D6644	B0HCKS000002	DIODE	1	
D6661	MA111	DIODE	1	
D6662-64	MA8330M	ZENER DIODE	3	
D6665	MA8051L	ZENER DIODE	1	
D6666,67	MA111	DIODE	2	
D6671	MA111	DIODE	1	
D6682	B0HCMM000014	DIODE	1	
D6683,84	MA111	DIODE	2	
D6686,87	MA111	DIODE	2	
D6701,02	MA8056H	ZENER DIODE	2	
D6721	B0HCKS000002	DIODE	1	
D6723,24	B0JCME000037	DIODE	2	
D6725	B0ECHP000003	DIODE	1	
D6726-33	MA8056H	ZENER DIODE	8	
D6734	MA111	DIODE	1	
D6752	B0JCME000037	DIODE	1	

Ref. No.	Part No.	Part Name & Description	Pcs	Remarks
D6758	B0ECHP000003	DIODE	1	
D6760,61	MA111	DIODE	2	
D6771	B0JCME000037	DIODE	1	
D6773	B0HCKS000002	DIODE	1	
D6791	MA8200M	ZENER DIODE	1	
D6802	B0BC01000044	ZENER DIODE	1	
D6803	B0HCKS000002	DIODE	1	
D6804	B0ECHP000003	DIODE	1	
D6805	MA111	DIODE	1	
D6806	B0ECHP000003	DIODE	1	
D6807-10	B0HCMM000014	DIODE	4	
D6820-23	MA111	DIODE	4	
D6825	MA8330M	ZENER DIODE	1	
D6826	MA111	DIODE	1	
D6841	B0HCKS000002	DIODE	1	
D6842,43	MA111	DIODE	2	
D6859	B0ECHP000003	DIODE	1	
D6860	B0HCKS000002	DIODE	1	
D6861	MA8051L	ZENER DIODE	1	
D6862	MA111	DIODE	1	
D6871	MA8051L	ZENER DIODE	1	
D6872	MA111	DIODE	1	
D6901,02	MA8056H	ZENER DIODE	2	
D6903,04	B0ECHP000003	DIODE	2	
D6951,52	MA8056H	ZENER DIODE	2	
D6953,54	B0ECHP000003	DIODE	2	
D7752	B3AEB0000065	DIODE	1	
D8002	MA728	DIODE	1	TH-50PX600B
D8203,04	B0JCPE000004	DIODE	2	TH-50PX600B
D8501	B0CCAB000039	DIODE	1	TH-50PX600B
D9017-19	MA3033	ZENER DIODE	3	
D9020	MA728	DIODE	1	
D9035	MA728	DIODE	1	
D9100-03	B0JCGD000002	DIODE	4	
D9105,06	B0JCGD000002	DIODE	2	
D9110	B0JCGD000002	DIODE	1	
D9300,01	MA152K	DIODE	2	
D9400,01	MA152K	DIODE	2	
D9800	B0JCME000037	DIODE	1	
D9801	B0JCDD000002	DIODE	1	
D9802	MA728	DIODE	1	
D9804	MA152K	DIODE	1	
D9807,08	MA152K	DIODE	2	
D9812	B0JCME000037	DIODE	1	
D9813	B0JCDD000002	DIODE	1	
D9814	B0JCME000037	DIODE	1	
	B0JCDD000002		1	
D9815	D03CDD000002	DIODE	1	
DG1	K1KY80A00011	80P CONNECTOR	1	
DG2	K1KA15B00074	15P CONNECTOR	1	
DG3	K1KY40B00003	40P CONNECTOR	1	
	K1KB21BA0063	21P CONNECTOR	1	
DG5		1211 CONTINUE	1 1	İ.
DG5 DG7	K1KA20B00155	20P CONNECTOR	1	

Ref. No.	Part No.	Part Name & Description	Pcs	Remarks
DG15	K1KY40B00003	40P CONNECTOR	1	
DG20	K1MN40B00045	40P CONNECTOR	1	
DG22	K1KBB0A00009	CONNECTOR	1	TH-50PX600B
DG35	K1KA07BA0047	7P CONNECTOR	1	
FL3301,02	J0HABB000003	LC FILTER	2	
FL3303-05	J0HABB000004	LC FILTER	3	
FL4010,11	J0HABH000012	LC FILTER	2	TH-50PX600B
FL4015	J0HABH000012	LC FILTER	1	TH-50PX600B
FL7201	J0HABH000013	LC FILTER	1	
FL7301	J0HABH000013	LC FILTER	1	
FL7501	J0HABH000013	LC FILTER	1	
FL9300	F1J1E1040022	LC FILTER	1	
FL9301	J0HABH000013	LC FILTER	1	
FL9302-04	F1J1E1040022	LC FILTER	3	
FL9305,06	J0HABH000013	LC FILTER	2	
FL9400,01	J0HABH000013	LC FILTER	2	
FL9402-04	F1J1E1040022	LC FILTER	3	
FL9501,02	J0HABH000013	LC FILTER	2	
FL9800,01	J0HABH000013	LC FILTER	2	
FL9803,04	J0HABH000012	LC FILTER	2	
FL9805-07	J0HABH000013	LC FILTER	3	
G1	K1KA12A00317	12P CONNECTOR	1	
G3	K1KA03BA0047	3P CONNECTOR	1	
G51	K1KA30AA0009	30P CONNECTOR	1	
GK 3	K1KA03BA0061	3P CONNECTOR	1	
GS12	K1MN40A00025	40P CONNECTOR	1	
GS52	K1KA20AA0009	20P CONNECTOR	1	
H1	K1KY80A00011	80P CONNECTOR	1	
H2	K1KA15A00148	15P CONNECTOR	1	
H5	K1KA15AA0288	15P CONNECTOR	1	
H6	K1KA09A00230	9P CONNECTOR	1	
H15	K1KA04AA0150	4P CONNECTOR	1	
H40	K1KA20AA0009	20P CONNECTOR	1	
H51	K1KA30AA0009	30P CONNECTOR	1	
H52	K1KA20AA0009	20P CONNECTOR	1	
HC01	K1KA21A00011	21P CONNECTOR	1	
HC12	K1KA09AA0190	9P CONNECTOR	1	
HC15	K1KY40B00003	40P CONNECTOR	1	
HC21	K1KA08AA0193	8P CONNECTOR	1	
HC22	K1KA11AA0194	11P CONNECTOR	1	
			+ -	
IC1100	C3ABPG000145	IC	1	
IC1101	C3FBMD000223	IC	1	PAVCCZ
IC1101	TVRN757	IC	1	PAVCCZ
IC1102	MN103SB20RGL	IC	1	
IC1105 IC1105,06	C0JBAS000128	IC	2	TH-50PX600B
IC1103,00	C0JBAS000128	IC	1	.11 001 70000
IC1107	5005A000120	IC		

Ref. No.	Part No.	Part Name & Description	Pcs	Remarks
IC1111	C0EBY0000041	IC	1	
IC2103	AN77L08M	IC	1	
IC2104	C0ABBA000168	IC	1	
IC2105	AN15862A-VT	IC	1	
IC2106	C1AB00002469	IC	1	
IC2109	C1BB00000947	IC	1	
IC2110	AN7705SP	IC	1	
IC2300,01	C0ABBA000168	IC	2	
IC2302	C1AB00002451	IC	1	
IC2303	C1AB00002452	IC	1	
IC2304-07	C0ABBA000168	IC	4	
IC2511	B3L000000020	IC	1	
IC3005	AN15867A-VT	IC	1	
IC3301	C0JBAZ002205	IC	1	
IC4013	C0CBCBF00009	IC	1	
IC4014	C0CBCAC00282	IC	1	
IC4016	C0CBCAC00275	IC	1	
IC4017	C0CBCAC00282	IC	1	
IC4018	C0CBCAC00275	IC	1	
IC4019	C1AB00002456	IC	1	
IC4020	C1AB00002202	IC	1	
IC4022	TVRN916	IC	1	
IC4023	TVRN917	IC	1	
IC4025	C0FBBK000038	IC	1	
IC4026	C1AB00002535	IC	1	
IC4027	C0DBFFD00003	IC	1	
IC4028	C0ABBB000230	IC	1	
IC4029	C0CBCAC00282	IC	1	
IC4030	C0CBCBC00190	IC	1	
IC4032	C0DBGYY00052	IC	1	
IC4035	C0CBCAF00031	IC	1	
IC4036	C0JBAP000020	IC	1	
IC4037	MN84522-A	IC	1	
IC4038	C3ABQJ000048	IC	1	
IC4040	C0CBCAC00282	IC	1	
IC5601	N0BG2DE00001	IC	1	
IC5602	EHMDD9851	LINEAR IC	1	
IC5602	C0DBAJB00004	IC IC	1	
IC5603	C0DBZGC00067	IC	1	
IC5801		IC	1	
IC6131	C0DBAZF00003	IC	1	
IC6151	C0ZBZ0000895 C0ZBZ0001324	IC	1	
	C0ZBZ0001324 C0ZBZ0000895	IC	1	
IC6191	C0ZBZ0000895	IC	1	
IC6211				
IC6221	AN1431M	LINEAR IC	1	
IC6241	COJBAZ000005	IC INTEGRATED CIRCUIT	1	
IC6251	NJM2903M	INTEGRATED CIRCUIT	1	
IC6471	C0DBEKA00003	IC	1	
IC6472	C0JBAA000377	IC IO	1	
IC6501	C0ZBZ0000895	IC	1	
IC6521	C0ZBZ0001324	IC	1	
IC6561,62	C0JBAZ000005	IC	2	
IC6581	NJM2903M	INTEGRATED CIRCUIT	1	
IC6601	C0ZBZ0001325	IC	1	

C0JBAB000715 NJM2903M C0ZBZ0001325	IC INTEGRATED CIRCUIT	1	
	INTEGRATED CIRCUIT		
C07B70001325	INTEGRATED OILOGOT	1	
00202001020	IC	1	
C0ZBZ0001325	IC	1	
C0JBAA000377	IC	1	
C0JBAZ000994	IC	2	
C0CBADC00089	IC	2	
C0CBADC00089	IC	1	
C0ZBZ0001325	IC	1	
C0JBAB000715	IC	1	
C0CBADC00089	IC	1	
C0ZBZ0001325	IC	1	
C0JBAA000377	IC	2	
N0BF1FB00001	IC	1	
C0DBEMB00005	IC	2	
C0DAAMH00005	IC	1	
C0DBEMB00005	IC	1	
C0DBEMB00005	IC	1	
NJM2903M	INTEGRATED CIRCUIT	1	
NJM2903M	INTEGRATED CIRCUIT	1	
AN16071A-VT	IC	6	
AN16071A-VT	IC	6	
C0JBAZ001120	IC	1	
C0JBAZ001120	IC	9	
C0JBAZ001120	IC	5	
C0JBAZ001120	IC	5	
C0JBAZ001120	IC	9	
C0JBAZ001120	IC	1	
C0JBAZ000851	IC	1	
STV0360CT	IC	1	TH-50PX600B PAVCCZ
C3ABQG000095	IC	1	TH-50PX600B PAVCCZ
MN2WS0025BEA	IC	1	TH-50PX600B PAVCCZ
TVRN789	IC	1	TH-50PX600B PAVCCZ
C0DBAMH00018	IC	2	TH-50PX600B
C0FBBK000038	IC	1	TH-50PX600B
		1	TH-50PX600B
		1	TH-50PX600B PAVCCZ
			TH-50PX600B
C0JBAZ001137	IC	1	TH-50PX600B
74LVC4245AD	IC	1	TH-50PX600B PAVCCZ
	IC	1	TH-50PX600B PAVCCZ
	IC	1	TH-50PX600B PAVCCZ
			TH-50PX600B PAVCCZ
		1	TH-50PX600B
			TH-50PX600B PAVCCZ
			TH-50PX600B
	COJBAZO00994 COCBADC00089 COCBADC00089 COZBZ0001325 COJBAB000715 COCBADC00089 COZBZ0001325 COJBAA000377 NOBF1FB00001 CODBEMB00005 CODAMH00005 CODBEMB00005 CODBEMB00005 NJM2903M NJM2903M AN16071A-VT COJBAZ001120 COJBAZ000851 STV0360CT C3ABQG000095 MN2WS0025BEA TVRN789 CODBAMH00018 COFBBK000038 BA15218FDX CODBEHG00006 COEBM0000026	COJBAZ000994 IC COCBADC00089 IC COCBADC00089 IC COCBADC00089 IC COZBZ0001325 IC COJBAB000715 IC COCBADC00089 IC COCBADC00089 IC COCBADC00089 IC COCBADC00089 IC COCBADC00089 IC CODBADC00089 IC COJBAA000377 IC NOBF1FB00001 IC CODBEMB00005 IC CODBEMB00005 IC CODBEMB00005 IC CODBEMB00005 IC CODBEMB00005 IC CODBEMB00005 IC CODBEMB00010 IC COJBAZ0011 IC COJBAZ001 IC COJBAZ001 IC COJBAZ001 IC COJBAZ001 IC COJBAZ001 IC COJBAZ000085 IC MN2WS0025BEA IC TVRN789 IC CODBEMB00008 IC CODBEMB00008 IC CODBEMB00008 IC COJBAZ0011 IC COJBAZ0011 IC COJBAZ001 IC COJBAZ002691 IC COJBAZ002691 IC COJBAZ002691 IC COJBAZ002691 IC COJBAZ001 IC COJBAZ	COJBAZ000994 IC 2 COCBADC00089 IC 2 COCBADC00089 IC 1 COZBAD0001325 IC 1 COZBAC00089 IC 1 COZBZ0001325 IC 1 COJBAA000377 IC 2 NOBFIFERORD1 IC 1 CODBEMB00005 IC 1 NJM2903M INTEGRATED CIRCUIT 1 NJM2903M INTEGRATED CIRCUIT 1 AN16071A-VT IC 6 COJBAZ001120 IC 9 COJBAZ001120 IC 9 COJBAZ001120 IC 9 COJBAZ001120 IC 9 COJBAZ001120 IC 1 COJBAZ001120 IC 1 COJBAZ001120 IC 1

Ref. No.	Part No.	Part Name & Description	Pcs	Remarks
IC9304	TVRN825	IC	1	
C9400	MN84521-A	IC	1	
C9401	C3ABQJ000051	IC	1	
C9402	C0JBAZ002614	IC	1	
C9500	C1ZBZ0002599	IC	1	
C9503-05	C0JBAZ001120	IC	3	
C9602	PST9128NR	IC (LOGIC)	1	
C9800	C0DBAYY00054	IC	1	
C9801	C0DBZFG00066	IC	1	
C9802,03	C0JBAZ001120	IC	2	
C9806	C0DBAHD00011	IC	1	
C9807	C0DBAYY00054	IC	1	
C9809	C0DBAYY00054	IC	1	
JK2002,03	K4BK03A00002	AV TERMENAL	2	
JK3001	K1FB315A0005	JACK	1	
JK3002-04	K1FB121A0010	CONNECTOR	3	PAVCCZ
JK3005	K2HA307A0007	JACK	1	PAVCCZ
JK3701	K4AK23B00001	TERMINAL BOARD	1	PAVCCZ
JK7701	K1NA09E00080	9P CONNECTOR	1	
JK8401	K1NA68B00042	68P CONNECTOR	1	TH-50PX600B PAVCCZ
JS001	ERJ3GEY0R00	M 0 OHM, 1/16W	1	TH-50PX600B
JS012	ERJ3GEY0R00	M 0 OHM, 1/16W	1	TH-50PX600B
JS1100-02	ERJ2GE0R00	M 0.0 OHM, J,0.063W	3	
JS1109	ERJ2GE0R00	M 0.0 OHM, J,0.063W	1	
JS1117	ERJ2GE0R00	M 0.0 OHM, J,0.063W	1	
JS2021,22	ERJ3GEY0R00	M 0 OHM, 1/16W	2	
JS2026	ERJ3GEY0R00	M 0 OHM, 1/16W	1	
JS2031-33	ERJ3GEY0R00	M 0 OHM, 1/16W	3	
JS2031-33 JS2108,09	ERJ3GEY0R00	M 0 OHM, 1/16W	2	
· · · · · · · · · · · · · · · · · · ·	ERJ3GEY0R00	M 0 OHM, 1/16W	_	
JS2123,24			2	
JS2300-03	ERJ6GEY0R00	M 0 OHM, 1/10W	4	
JS2318,19	ERJ6GEY0R00	M 0 OHM, 1/10W	2	
JS2331	ERJ6GEY0R00	M 0 OHM, 1/10W	1	
JS3005	ERJ6GEY0R00	M 0 OHM, 1/10W	1	
JS3007-20	ERJ6GEY0R00	M 0 OHM, 1/10W	14	
JS3023	ERJ3GEY0R00	M 0 OHM, 1/16W	1	
JS3037-39	ERJ3GEY0R00	M 0 OHM, 1/16W	3	
JS3201	ERJ3GEY0R00	M 0 OHM, 1/16W	1	
JS3206	ERJ3GEY0R00	M 0 OHM, 1/16W	1	
JS3215	ERJ6GEY0R00	M 0 OHM, 1/10W	1	
JS3220,21	ERJ6GEY0R00	M 0 OHM, 1/10W	2	
JS3230	ERJ3GEY0R00	M 0 OHM, 1/16W	1	
JS3237-39	ERJ3GEY0R00	M 0 OHM, 1/16W	3	
JS3252	ERJ6GEY0R00	M 0 OHM, 1/10W	1	
JS3255	ERJ6GEY0R00	M 0 OHM, 1/10W	1	
JS3256,57	ERJ3GEY0R00	M 0 OHM, 1/16W	2	
JS3302-04	ERJ3GEY0R00	M 0 OHM, 1/16W	3	
JS3307-12	ERJ3GEY0R00	M 0 OHM, 1/16W	6	
JS3352	J0JCC0000241	CHIP INDUCTOR	1	
JS3354-59	J0JCC0000241	CHIP INDUCTOR	6	
JS3362,63	ERJ3GEY0R00	M 0 OHM, 1/16W	2	
JS3402,03	ERJ3GEY0R00	M 0 OHM, 1/16W	2	

Ref. No.	Part No.	Part Name & Description	Pcs	Remarks
JS3404,05	ERJ6GEY0R00	M 0 OHM, 1/10W	2	
JS3704,05	ERJ6GEY0R00	M 0 OHM, 1/10W	2	
JS3707,08	ERJ6GEY0R00	M 0 OHM, 1/10W	2	
JS3711-14	ERJ6GEY0R00	M 0 OHM, 1/10W	4	
JS3715	ERJ3GEY0R00	M 0 OHM, 1/16W	1	
JS4013-17	ERJ2GE0R00	M 0.0 OHM, J,0.063W	5	
JS4020-24	ERJ2GE0R00	M 0.0 OHM, J,0.063W	5	
JS4025,26	ERJ2GEJ101	M 100 OHM, J,0.063W	2	
JS4027,28	ERJ2GE0R00	M 0.0 OHM, J,0.063W	2	
JS4029	ERJ2GEJ221	M 220 OHM, J,0.063W	1	
JS4033-40	ERJ2GE0R00	M 0.0 OHM, J,0.063W	8	
JS4042,43	ERJ2GE0R00	M 0.0 OHM, J,0.063W	2	TH-50PX600B
JS4046	ERJ2GE0R00	M 0.0 OHM, J,0.063W	1	TH-50PV600E
JS4047,48	ERJ2GE0R00	M 0.0 OHM, J,0.063W	2	TH-50PX600B
JS4069	ERJ2GEJ221	M 220 OHM, J,0.063W	1	
JS4075	ERJ2GE0R00	M 0.0 OHM, J,0.063W	1	TH-50PX600B
JS4077	ERJ2GE0R00	M 0.0 OHM, J,0.063W	1	TH-50PX600B
JS4077 JS4079	ERJ2GE0R00	M 0.0 OHM, J,0.063W	1	TH-50PX600B
JS4093	ERJ2GE0R00	M 0.0 OHM, J,0.063W	1	TH-50PV600E
JS4099	ERJ2GE0R00	M 0.0 OHM, J,0.063W	1	111 301 ¥000L
JS4103	ERJ2GE0R00	M 0.0 OHM, J,0.063W	1	TH-50PV600E
JS4103 JS4104	ERJ2GE0R00	M 0.0 OHM, J,0.063W	1	111-301 V000L
JS4111-13	ERJ3GEY0R00	M 0 OHM, 1/16W	3	
JS5603	ERJ3GEY0R00	M 0 OHM, 1/16W	1	
JS7702	ERJ3GEY0R00	M 0 OHM, 1/16W	1	
		•	1	
JS7711	ERJ3GEY0R00	M 0 OHM, 1/16W	3	
JS7721-23	ERJ6GEY0R00	M 0 OHM, 1/10W	3	
K1	K1KV12B00001	12P CONNECTOR	1	
N I	K1KY12B00001	12F CONNECTOR	•	
L008	J0JCC0000241	CHIP INDUCTOR	1	
L012		CHIP INDUCTOR	1	
	J0JCC0000241	+	1	
L017	J0JCC0000241	CHIP INDUCTOR		
L018	J0JGC0000021	CHIP INDUCTOR COIL	1	TIL FORVICOOF
L019	J0JCC0000241	CHIP INDUCTOR	1	TH-50PV600E
L020	J0JGC0000021	CHIP INDUCTOR COIL	1	
L021	ERJ3GEY0R00	M 0 OHM, 1/16W	1	
L1101-04	J0JHC0000078	CHIP INDUCTOR	4	
L1109	J0JHC0000078	CHIP INDUCTOR	1	
L2001,02	J0JCC0000364	CHIP INDUCTOR	2	
L2003-16	TSK1032	BEAD CHOKE	14	
L2107	TSK1032	BEAD CHOKE	1	
L2108	J0JCC0000241	CHIP INDUCTOR	1	
L2109,10	TSK1032	BEAD CHOKE	2	
L2111,12	J0JCC0000241	CHIP INDUCTOR	2	
L2115	J0JCC0000241	CHIP INDUCTOR	1	
L2117	ELESE6R8KA	PEAKING COIL	1	
L2118	EXCELDR35C	BEAD CHOKE	1	
L2123	J0JCC0000241	CHIP INDUCTOR	1	
L2178,79	J0JCC0000241	CHIP INDUCTOR	2	
L2182-87	J0JCC0000241	CHIP INDUCTOR	6	
L2204	ERJ3GEY0R00	M 0 OHM, 1/16W	1	
L2205,06	J0JCC0000241	CHIP INDUCTOR	2	
L2300-07	G0C330MA0049	PEAKING COIL	8	

Ref. No.	Part No.	Part Name & Description	Pcs	Remarks
L2308	TALL08N3R9MA	INDUCTION COIL	1	
L3000	G0C101K00023	PEAKING COIL	1	
L3001-03	TSK1032	BEAD CHOKE	3	
L3009	TSK1032	BEAD CHOKE	1	
L3026	TSK1032	BEAD CHOKE	1	
L3202	J0JCC0000241	CHIP INDUCTOR	1	
L3205	J0JCC0000241	CHIP INDUCTOR	1	
L3700,01	J0JCC0000364	CHIP INDUCTOR	2	
L3707,08	TSK1032	BEAD CHOKE	2	
L4021	J0JHC0000078	CHIP INDUCTOR	1	
L4023	J0JHC0000078	CHIP INDUCTOR	1	
L4027	J0JBC0000080	EMI FILTER	1	
L4028,29	J0JHC0000078	CHIP INDUCTOR	2	
L4031,32	J0JHC0000078	CHIP INDUCTOR	2	
L4033	TALC168T100K	CHIP INDUCTOR COIL	1	
L4034	J0JCC0000077	CHIP INDUCTOR	1	
L4037	J0JCC0000077	CHIP INDUCTOR	1	
L4038	J0JHC0000078	CHIP INDUCTOR	1	
L4040-46	J0JHC0000078	CHIP INDUCTOR	7	
L4048	J0JHC0000078	CHIP INDUCTOR	1	
L4049	J0JBC0000080	CHIP INDUCTOR	1	
L4050,51	J0JHC0000078	CHIP INDUCTOR	2	
L4052	J0JCC0000077	CHIP INDUCTOR	1	
L4053-55	J0JHC0000078	CHIP INDUCTOR	3	
L4056,57	J0JCC0000077	CHIP INDUCTOR	2	
L4060,61	J0JCC0000077	CHIP INDUCTOR	2	
L4065,66	J0JHC0000078	CHIP INDUCTOR	2	
L4068-70	J0JHC0000078	CHIP INDUCTOR	3	
L4071	J0JBC0000080	CHIP INDUCTOR	1	
L4073	J0JHC0000078	CHIP INDUCTOR	1	
L4075,76	J0JHC0000078	CHIP INDUCTOR	2	
L4077	J0JCC0000077	CHIP INDUCTOR	1	
L4078	J0JHC0000078	CHIP INDUCTOR	1	
L5602	TALL08N2R7MA	INDUCTION COIL	1	
L5604	TALL08N2R7MA	INDUCTION COIL	1	
L5605	G0A2R7ZA0021	CHOKE COIL	1	
L5606,07	G0A220GA0002	CHOKE COIL	2	
L5608		INDUCTION COIL	1	
	G1C100MA0072			
L5609	G0A220GA0002	CHOKE COIL	1	
L5610	G1C470MA0077	INDUCTION COIL	1	
L5612	TALLOSN2R7MA	INDUCTION COIL	1	
L5615	TALL08N150KA	INDUCTION COIL	1	
L5621	G1C330MA0234	INDUCTION COIL	1	
L5622,23	G1C150MA0234	INDUCTION COIL	2	
L5624	G1C330MA0234	INDUCTION COIL	1	
L5651	G0A220GA0002	CHOKE COIL	1	
L5801	G0C101K00023	PEAKING COIL	1	
L5802	TALL08N101KA	INDUCTION COIL	1	
L6002-04	G0CR82KA0147	CHOKE COIL	3	
L6011-14	G0A1R4MA0003	CHOKE COIL	4	
L6061-68	G0ZZ00002183	PEAKING COIL	8	
L6081-88	G0ZZ00002183	PEAKING COIL	8	
L6101,02	J0JJC0000011	CHIP INDUCTOR	2	
L6103	G0ZZ00002183	PEAKING COIL	1	

Ref. No.	Part No.	Part Name & Description	Pcs	Remarks
L6104,05	J0JJC0000011	CHIP INDUCTOR	2	
L6211,12	J0JJC0000011	CHIP INDUCTOR	2	
L6221	G0ZZ00002183	PEAKING COIL	1	
L6241	G0ZZ00002183	PEAKING COIL	1	
L6262	G0ZZ00002183	PEAKING COIL	1	
L6271,72	G0ZZ00002183	PEAKING COIL	2	
L6398,99	J0JJC0000011	CHIP INDUCTOR	2	
L6401,02	G0CR82KA0147	CHOKE COIL	2	
L6404	G0CR82KA0147	CHOKE COIL	1	
L6411-14	G0A1R4MA0003	CHOKE COIL	4	
L6461-68	G0ZZ00002183	PEAKING COIL	8	
L6472,73	G0ZZ00002183	PEAKING COIL	2	
L6481-88	G0ZZ00002183	PEAKING COIL	8	
L6591,92	G0ZZ00002183	PEAKING COIL	2	
L6601,02	G0ZZ00002183	PEAKING COIL	2	
L6801,02	J0JJC0000011	CHIP INDUCTOR	2	
L6841	J0JJC0000011	CHIP INDUCTOR	1	
L8004	J0JHC0000045	CHIP INDUCTOR	1	TH-50PX600B
L8008	J0JHC0000045	CHIP INDUCTOR	1	TH-50PX600B
L8026	J0JHC0000035	CHIP INDUCTOR	1	TH-50PX600B
L8031-33	J0JHC0000045	CHIP INDUCTOR	3	TH-50PX600B
L8037	J0JCC0000078	CHIP INDUCTOR	1	TH-50PX600B
L8038	J0JHC0000045	CHIP INDUCTOR	1	TH-50PX600B
L8042	J0JHC0000045	CHIP INDUCTOR	1	TH-50PX600B
L8046	ELJPA1R0MFB	INDUCTION COIL	1	TH-50PX600B
L8047	G1C680MA0173	INDUCTION COIL	1	TH-50PX600B PAVCCZ
L8048	G1C330MA0173	INDUCTION COIL	1	TH-50PX600B PAVCCZ
L8049	J0JHC0000045	CHIP INDUCTOR	1	TH-50PX600B PAVCC2
L8051			1	
	J0JCC0000241	CHIP INDUCTOR	1	TH-50PX600B
L8055	G1C100MA0077	INDUCTION COIL		TH-50PX600B
L8059	J0JHC0000045	CHIP INDUCTOR	1	TH-50PX600B
L8106	ELJFA2R7JBB	CHIP INDUCTOR	1	TH-50PX600B PAVCCZ
L8145	J0JHC0000045	CHIP INDUCTOR	1	TH-50PX600B
L8501	ELJNA2R7JFB	CHIP INDUCTOR	1	TH-50PX600B
L9501,02	J0JHC0000078	CHIP INDUCTOR	2	
L9503	G1C150KA0038	INDUCTION COIL	1	
L9800	G1C3R0MA0248	INDUCTION COIL	1	
L9801,02	G1C2R2MA0241	INDUCTION COIL	2	
L9810	J0JHC0000045	CHIP INDUCTOR	1	
PA1	K1KA04AA0192	4P CONNECTOR	1	
PA2	K1KA05AA0192	5P CONNECTOR	1	
PA5	K1KA11AA0194	11P CONNECTOR	1	
PA10	K1KA06A00452	6P CONNECTOR	1	
PA20	K1MN40A00024	40P CONNECTOR	1	
PA31-34	K1KA03AA0192	3P CONNECTOR	4	
PA40	K1KA20AA0009	20P CONNECTOR	1	
PA1101	K5H8012A0023	FUSE	1	
PA2100	K5H1622A0023	FUSE	1	
PA3100	K5H1622A0023	FUSE	1	
PA3104	ERJ3GEY0R00	M 0 OHM, 1/16W	1	
PA7751	K5H1622A0023	FUSE	1	
PA9800	K5H4022A0023	FUSE	1	

Ref. No.	Part No.	Part Name & Description	Pcs	Remarks
PC6480	B3PBA0000223	IC	1	
PC6701-03	B3PBA0000233	IC	3	
PC6704	B3PBA0000234	IC	1	
PC6705	B3PBA0000233	IC	1	
PC6760	B3PBA0000223	IC	1	
PC6801	B3PBA0000223	IC	1	
PC6861	B3PBA0000223	IC	1	
PC6871	B3PBA0000223	IC	1	
2002	2SA207700L	TRANSISTOR	1	
Q1100-03	2SC584500L	TRANSISTOR	4	
Q1106,07	2SC584500L	TRANSISTOR	2	TH-50PX600B
Q1108	2SC584500L	TRANSISTOR	1	
Q1109,10	B1CBHD000002	FET	2	
21111	2SC584500L	TRANSISTOR	1	
Q1113-18	2SC584500L	TRANSISTOR	6	
Q1120-22	2SC584500L	TRANSISTOR	3	
Q1130	2SC584500L	TRANSISTOR	1	
Q1131	B1ABDF000034	# B1ABCF000138,2SC584500	1	
Q1134	2SC584500L	TRANSISTOR	1	
Q1135	B1ABDF000034	# B1ABCF000138,2SC584500	1	
Q1137-43	2SC584500L	TRANSISTOR	7	
Q2001-04	2SC584500L	TRANSISTOR	4	
Q2006,07	2SC584500L	TRANSISTOR	2	
Q2009,10	2SC584500L	TRANSISTOR	2	
Q2011	2SA207700L	TRANSISTOR	1	
Q2012	2SC584500L	TRANSISTOR	1	
Q2013	2SA207700L	TRANSISTOR	1	
Q2102-05	2SA207700L	TRANSISTOR	4	
Q2106	2SC584500L	TRANSISTOR	1	
Q2108	2SC584500L	TRANSISTOR	1	
Q2113,14	2SC584500L	TRANSISTOR	2	
Q2300	2SA207700L	TRANSISTOR	1	(H)
Q2300	2SC584500L	TRANSISTOR	1	(PA)
Q2301	2SD601A	TRANSISTOR	1	(PA)
Q2301	2SD601A	TRANSISTOR	1	(H)
Q2302	2SC584500L	TRANSISTOR	1	
Q2305	2SD601A	TRANSISTOR	1	
Q2306-09	2SA207700L	TRANSISTOR	4	
Q2314-17	2SC584500L	TRANSISTOR	4	
Q2510,11	2SD601A	TRANSISTOR	2	
Q2518	2SD601A	TRANSISTOR	1	TH-50PX600B
Q3001	2SC584500L	TRANSISTOR	1	001 7,000
Q3005	2SC584500L	TRANSISTOR	1	
Q3008	2SA207700L	TRANSISTOR	1	
23006 23011	2SA207700L	TRANSISTOR	1	
Q3014,15			2	
•	2SA207700L	TRANSISTOR	1	
Q3016 Q3017	2SC584500L	TRANSISTOR		
Q3017	2SA207700L	TRANSISTOR	1	
Q3019-24	2SC584500L	TRANSISTOR	6	
Q3027-29	2SA207700L	TRANSISTOR	3	
Q3331-33	2SC2480	TRANSISTOR	3	
Q4043,44	2SA207700L	TRANSISTOR	2	
Q4046	2SA207700L	TRANSISTOR	1	

Ref. No.	Part No.	Part Name & Description	Pcs	Remarks
Q4050	2SC584500L	TRANSISTOR	1	
Q4051,52	2SD1030	TRANSISTOR	2	
Q4053	2SC584500L	TRANSISTOR	1	
Q4054	2SD1030	TRANSISTOR	1	
Q4055-59	2SA207700L	TRANSISTOR	5	
Q4061-69	2SC584500L	TRANSISTOR	9	
Q4070,71	B1MBACA00008	TRANSISTOR	2	
Q4082,83	2SK1228	FET	2	
Q4084	B1ABDF000034	# B1ABCF000138,2SC584500	1	
Q4918	B1ABDF000034	# B1ABCF000138,2SC584500	1	
Q4919	2SC584500L	TRANSISTOR	1	
Q5601	B1DHDC000028	TRANSISTOR	1	
Q5602	2SD601A	TRANSISTOR	1	
Q5603	B1DHDC000028	TRANSISTOR	1	
Q5604,05	2SD601A	TRANSISTOR	2	
Q5610	2SD601A	TRANSISTOR	1	
Q5613	2SD601A	TRANSISTOR	1	
Q5614	2SK3065T100	FET	1	
Q5641-43	2SA207700L	TRANSISTOR	3	
Q5644	2SD601A	TRANSISTOR	1	
Q6001-03	B1JADN000001	TRANSISTOR	3	
Q6021-23	B1JADN000001	TRANSISTOR	3	
Q6041-43	B1JADN000002	TRANSISTOR	3	
Q6052,53	B1JADN000002	TRANSISTOR	2	
Q6101,02	B1DFKM000002	TRANSISTOR	2	
Q6103	B1ABNF000006	TRANSISTOR	1	
Q6104	B1ADNF000006	TRANSISTOR	1	
Q6105,06	B1DFKM000002	TRANSISTOR	2	
 Q6111	2SK326800L	FET	1	
Q6112	B1DFKM000002	TRANSISTOR	1	
Q6114	B1DFKM000002	TRANSISTOR	1	
Q6141	B1ABNF00006	TRANSISTOR	1	
Q6142	B1ADNF00006	TRANSISTOR	1	
Q6146	B1ABNF00006	TRANSISTOR	1	
Q6147	B1ADNF00006	TRANSISTOR	1	
Q6171	2SD2185	TRANSISTOR	1	
Q6172	B1ADRD000001	TRANSISTOR	1	
Q6181	2SD2185	TRANSISTOR	1	
Q6182	B1ADRD000001	TRANSISTOR	1	
Q6221	2SD1263A	TRANSISTOR	1	
Q6222	2SC3063	TRANSISTOR	1	
Q6251			1	
Q6401-03	2SD601A B1JADN000001	TRANSISTOR TRANSISTOR	3	
Q6421-23	B1JAEP000001	TRANSISTOR	3	
Q6421-23 Q6441-43	B1JADN000002	TRANSISTOR	3	
Q6452,53			2	
	B1JADP000002	TRANSISTOR	1	
Q6471 Q6511	B1CHGD000006	TRANSISTOR		
Q6511	B1ABNF000006	TRANSISTOR	1	
Q6512	B1ADNF000006	TRANSISTOR	1	
Q6516	B1ABNF000006	TRANSISTOR	1	
Q6517	B1ADNF000006	TRANSISTOR	1	
Q6531	2SD2185	TRANSISTOR	1	
Q6532	B1ADRD000001	TRANSISTOR	1	
Q6551	2SD2185	TRANSISTOR	1	

Ref. No.	Part No.	Part Name & Description	Pcs	Remarks
Q6552	B1ADRD000001	TRANSISTOR	1	
Q6581	2SD601A	TRANSISTOR	1	
Q6601	B1DEDS000001	TRANSISTOR	1	
Q6602	2SD601A	TRANSISTOR	1	
Q6621,22	B1DFKM000001	TRANSISTOR	2	
Q6641-45	B1DFKM000001	TRANSISTOR	5	
Q6647,48	B1DFKM000001	TRANSISTOR	2	
Q6661	B1DEET000002	TRANSISTOR	1	
Q6662	2SD601A	TRANSISTOR	1	
Q6663	2SD2185	TRANSISTOR	1	
Q6671-73	B1DEDS000001	TRANSISTOR	3	
Q6680	B1ADNF000006	TRANSISTOR	1	
Q6681,82	2SK389500L	FET	2	
Q6691	2SK620	FET	1	
Q6742,43	2SD601A	TRANSISTOR	2	
Q6744	2SK620	FET	1	
Q6762	B1ADNF00006	TRANSISTOR	1	
Q6781	B1ABNF00006	TRANSISTOR	1	
Q6782	B1ADNF00006	TRANSISTOR	1	
Q6791	2SD601A	TRANSISTOR	1	
Q6803	2SD814A	TRANSISTOR	1	
Q6821	2SD1263A	TRANSISTOR	1	
Q6822	2SC3063	TRANSISTOR	1	
Q6824	2SD601A	TRANSISTOR	1	
Q6841	2SD1263A	TRANSISTOR	1	
Q6842	2SC1473A	TRANSISTOR	1	
Q7751,52	2SD601A	TRANSISTOR	2	
Q7753	2SC584500L	TRANSISTOR	1	
Q7754	2SD601A	TRANSISTOR	1	
Q8101	2SA207700L	TRANSISTOR	1	TH-50PX600B
Q8401,02	2SD601A	TRANSISTOR	2	TH-50PX600B
Q9044	2SD601A	TRANSISTOR	1	IN-SUFACOUD
			1	
Q9046	2SD601A	TRANSISTOR		
Q9049	2SB709A	TRANSISTOR	1 5	
Q9050-54	2SD601A	TRANSISTOR	5	
Q9057,58	B1CBHD000002	FET	2	
Q9100	2SD601A	TRANSISTOR	1	
Q9200,01	B1CBHD000002	FET	2	
Q9301,02	2SD601A	TRANSISTOR	2	
Q9400-02	2SD601A	TRANSISTOR	3	
Q9800,01	B1MBEDA00015	TRANSISTOR	2	
Q9803	B1MBEDA00015	TRANSISTOR	1	
Q9805,06	2SD601A	TRANSISTOR	2	
R002	ERJ3GEYJ221	M 220 OHM,J,1/16W	1	
R005	ERJ3EKF5600	M 560 OHM, 1/16W	1	
R008,09	ERJ3GEY0R00	M 0 OHM, 1/16W	2	
R010	ERJ3EKF4700	M 470 OHM, 1/16W	1	
R011	ERJ6GEYJ271	M 270 OHM,J,1/10W	1	
R012,13	ERJ3GEYJ220	M 22 OHM,J,1/16W	2	
R014	ERJ3GEYJ221	M 220 OHM,J,1/16W	1	
R1101	ERJ2GEJ101	M 100 OHM, J,0.063W	1	
R1102,03	ERJ2GEJ102	M 1KOHM, J,0.063W	2	
R1105,06	ERJ2GEJ102	M 1KOHM, J,0.063W	2	

Ref. No.	Part No.	Part Name & Description	Pcs	Remarks
R1108-12	ERJ2GEJ101	M 100 OHM, J,0.063W	5	
R1113	ERJ2GEJ332	M 3.3KOHM, J,0.063W	1	
R1114	ERJ2GE0R00	M 0.0 OHM, J,0.063W	1	
R1116	ERJ2GEJ562	M 5.6KOHM,J,0.063W	1	
R1117	ERJ2GE0R00	M 0.0 OHM, J,0.063W	1	
R1118,19	EXB2HV680J	RESISTOR ARRAY	2	
R1121,22	ERJ2GEJ220	M 22 OHM, J,0.063W	2	
R1123	ERJ2GEJ473	M 47KOHM,J,0.063W	1	
R1124,25	ERJ2GEJ332	M 3.3KOHM, J,0.063W	2	
R1128	ERJ2GEJ103	M 10KOHM, J,0.063W	1	
R1130	ERJ2GEJ473	M 47KOHM,J,0.063W	1	
R1131,32	ERJ2GEJ101	M 100 OHM, J,0.063W	2	
R1133,34	ERJ2GEJ102	M 1KOHM, J,0.063W	2	
R1135	ERJ2GEJ103	M 10KOHM, J,0.063W	1	
R1140,41	ERJ2GEJ680	M 68 OHM, J,0.063W	2	
R1145	ERJ2GEJ101	M 100 OHM, J,0.063W	1	TH-50PX600B
R1146	ERJ2GEJ271	M 270 OHM, J,0.063W	1	
R1147,48	D1HG5608A002	NETWORK RESISTER	2	
R1149	EXB2HV680J	RESISTOR ARRAY	1	
R1150	ERJ2GEJ101	M 100 OHM, J,0.063W	1	TH-50PX600B
R1151	ERJ2GEJ101	M 100 OHM, J,0.063W	1	
R1150,51	ERJ2GEJ101	M 100 OHM, J,0.063W	2	
R1153	ERJ2GEJ101	M 100 OHM, J,0.063W	1	
R1154,55	ERJ2GEJ472	M 4.7KOHM, J,0.063W	2	
R1156	ERJ2GEJ104	M 100KOHM, J,0.063W	1	
R1157	ERJ2GEJ101	M 100 OHM, J,0.063W	1	
R1158	ERJ2GEJ273	M 27KOHM ,J,0.063W	1	
R1159	ERJ2GEJ123X	M 12KOHM ,J,0.063W	1	
R1160	ERJ2GEJ473	M 47KOHM,J,0.063W	1	TH-50PV600E
R1162	ERJ2GEJ473	M 47KOHM,J,0.063W	1	TH-50PV600E
R1164	ERJ2GEJ123X	M 12KOHM ,J,0.063W	1	
R1165	ERJ2GEJ153	M 15KOHM ,J,0.063W	1	
R1166,67	ERJ2GEJ101	M 100 OHM, J,0.063W	2	TH-50PX600B
R1168,69	ERJ2GE0R00	M 0.0 OHM, J,0.063W	2	
R1174	ERJ2GEJ101	M 100 OHM, J,0.063W	1	
R1175	ERJ2GEJ563	M 56KOHM ,J,0.063W	1	
R1176	ERJ2GEJ123X	M 12KOHM ,J,0.063W	1	
R1177-79	ERJ2GEJ101	M 100 OHM, J,0.063W	3	
R1181	ERJ2GEJ101	M 100 OHM, J,0.063W	1	
R1182	ERJ2GEJ683	M 68KOHM, J,0.063W	1	
R1183	EXB28V680JX	RESISTOR ARRAY	1	
R1184	ERJ2GE0R00		1	
R1187	EXB2HV680J	M 0.0 OHM, J,0.063W RESISTOR ARRAY	1	
R1188,89	ERJ2GEJ103	M 10KOHM, J,0.063W	2	
R1193,94		М 100 OHM, J,0.063W		
	ERJ2GEJ101		2	
R1199	ERJ2GEJ473	M 47KOHM,J,0.063W	1	
R1200	EXB2HV680J	RESISTOR ARRAY	1	
R1203	ERJ2GEJ102	M 100KOUM 10.063W	1	
R1207	ERJ2GEJ104	M 100KOHM, J,0.063W	1	
R1212	ERJ2GE0R00	M 0.0 OHM, J,0.063W	1	
R1214	ERJ2GEJ103	M 10KOHM, J,0.063W	1	
R1215-17	ERJ2GEJ101	M 100 OHM, J,0.063W	3	
R1218	ERJ2GEJ680	M 68 OHM, J,0.063W	1	

Ref. No.	Part No.	Part Name & Description	Pcs	Remarks
R1221	ERJ2GEJ332	M 3.3KOHM, J,0.063W	1	
R1222	ERJ2GEJ330	M 33 OHM, J,0.063W	1	
R1223	ERJ2GEJ102	M 1KOHM, J,0.063W	1	
R1224	ERJ2GEJ473	M 47KOHM,J,0.063W	1	
R1225,26	ERJ2GEJ220	M 22 OHM, J,0.063W	2	
R1228	ERJ2GEJ220	M 22 OHM, J,0.063W	1	
R1229	ERJ2GEJ182	M 1.8KOHM, J,0.063W	1	
R1230	ERJ2GEJ220	M 22 OHM, J,0.063W	1	
R1231	ERJ2GEJ473	M 47KOHM,J,0.063W	1	
R1232,33	ERJ2GEJ332	M 3.3KOHM, J,0.063W	2	
R1234	ERJ2GE0R00	M 0.0 OHM, J,0.063W	1	
R1235,36	ERJ2GEJ272	M 2.7KOHM, J,0.063W	2	
R1238	ERJ2GEJ473	M 47KOHM,J,0.063W	1	
R1239	ERJ3EKF1202	M 12KOHM, 1/16W	1	
R1240	ERJ2GEJ473	M 47KOHM,J,0.063W	1	
R1241	ERJ2GEJ822	M 8.2KOHM, J,0.063W	1	
R1243	ERJ2GEJ102	M 1KOHM, J,0.063W	1	
R1246	ERJ2GEJ912	M 9.1KOHM, J,0.063W	1	
R1249	ERJ2GEJ473	M 47KOHM,J,0.063W	1	
R1250	ERJ2GEJ224	M 220KOHM, J,0.063W	1	
R1251,52	EXB2HV101J	RESISTOR ARRAY	2	
R1256	ERJ2GEJ102	M 1KOHM, J,0.063W	1	
R1259	ERJ2GEJ101	M 100 OHM, J,0.063W	1	TH-50PX600B
R1263,64	ERJ2GEJ101	M 100 OHM, J,0.063W	2	
R1269	ERJ2GE0R00	M 0.0 OHM, J,0.063W	1	
R1270,71	ERJ2GEJ220	M 22 OHM, J,0.063W	2	
R1275	ERJ3EKF7151	M7.15KOHM, 1/16W	1	
R1279,80	ERJ2GEJ220	M 22 OHM, J,0.063W	2	
	ERJ2GEJ102	M 1KOHM, J,0.063W	1	
R1282	ERJ2GEJ153	M 15KOHM ,J,0.063W	1	
R1283	ERJ2GEJ101	M 100 OHM, J,0.063W	1	
R1284	ERJ2GEJ682	M 6.8KOHM, J,0.063W	1	
R1290	ERJ2GEJ472	M 4.7KOHM, J,0.063W	1	
R1292,93	ERJ2GEJ104	M 100KOHM, J,0.063W	2	TH-50PX600B
R1296,97	ERJ2GEJ473	M 47KOHM,J,0.063W	2	TH-50PX600B
R1299-02	ERJ2GE0R00	M 0.0 OHM, J,0.063W	4	TH-50PV600E
R1303-06	ERJ2GEJ220	M 22 OHM, J,0.063W	4	TH-50PX600B
R1307	ERJ2GEJ104	M 100KOHM, J,0.063W	1	
R1308	ERJ2GEJ273	M 27KOHM ,J,0.063W	1	
R1309-12	ERJ2GEJ220	M 22 OHM, J,0.063W	4	
R1313,14	ERJ2GEJ103	M 10KOHM, J,0.063W	2	
R1315,14	ERJ2GEJ333	M 33KOHM, J,0.063W	1	
R1316	ERJ2GEJ103	M 10KOHM, J,0.063W	1	
R1318,19	ERJ2GEJ512X	M5.12KOHM, J,0.063W	2	
R1321	ERJ2GEJ153	M 15KOHM ,J,0.063W	1	
R1322	ERJ2GEJ100	M 10 OHM, J,0.063W	1	
R1323,24	ERJ2GEJ823	M 82KOHM, J,0.063W	2	
R1325,26	ERJ2GEJ104	M 100KOHM, J,0.063W	2	
R1325,26 R1327,28	ERJ2GEJ104 ERJ2GEJ683	M 68KOHM, J,0.063W	2	
		M 47KOHM, J,0.063W	2	
R1329,30	ERJ2GEJ473			
R1331,32	ERJ2GEJ104	M 100KOHM, J,0.063W	2	
R1333	ERJ2GEJ101	M 100 OHM, J,0.063W	1	
R1334 R1335	ERJ2GE0R00 ERJ2GEJ101	M 0.0 OHM, J,0.063W M 100 OHM, J,0.063W	1 1	

Ref. No.	Part No.	Part Name & Description	Pcs	Remarks
R1336	ERJ2GEJ225	M 1MOHM, J,0.063W	1	
R1337	ERJ2GEJ472	M 4.7KOHM, J,0.063W	1	
R1340	ERJ2GEJ473	M 47KOHM,J,0.063W	1	TH-50PV600E
R1341	ERJ2GEJ473	M 47KOHM,J,0.063W	1	
R1344	ERJ2GEJ101	M 100 OHM, J,0.063W	1	
R1346	ERJ2GEJ473	M 47KOHM,J,0.063W	1	
R1350,51	ERJ2GEJ101	M 100 OHM, J,0.063W	2	
R1352	ERJ2GEJ473	M 47KOHM,J,0.063W	1	
R1353	ERJ2GEJ223	M 22KOHM, J,0.063W	1	
R1354	ERJ2GEJ101	M 100 OHM, J,0.063W	1	
R1355	ERJ2GEJ104	M 100KOHM, J,0.063W	1	
R1358	ERJ2GEJ104	M 100KOHM, J,0.063W	1	
R1359	ERJ2GEJ224	M 220KOHM, J,0.063W	1	
R1360	ERJ2GEJ221	M 220 OHM, J,0.063W	1	
R1361	ERJ2GE0R00	M 0.0 OHM, J,0.063W	1	
R1363	ERJ2GEJ473	M 47KOHM,J,0.063W	1	
R1364	ERJ2GEJ273	M 27KOHM ,J,0.063W	1	
R1365	ERJ2GE0R00	M 0.0 OHM, J,0.063W	1	
R1367	ERJ2GEJ333	M 33KOHM, J,0.063W	1	
R1368	ERJ2GEJ183	M 18KOHM ,J,0.063W	1	
R1369	ERJ2GE0R00	M 0.0 OHM, J,0.063W	1	
R1370	ERJ2GEJ104	M 100KOHM, J,0.063W	1	
R1372	ERJ2GEJ473	M 47KOHM,J,0.063W	1	
R1373	ERJ2GEJ683	M 68KOHM, J,0.063W	1	
R1375	ERJ2GEJ104	M 100KOHM, J,0.063W	1	
R1376	ERJ2GEJ273	M 27KOHM ,J,0.063W	1	
R1377	ERJ8GEY0R00	M 0 OHM, 1/8W	1	
R1378	ERJ3GEY0R00	M 0 OHM, 1/16W	1	
R1379	ERJ2GEJ331	M 330 OHM, J,0.063W	1	
R1380	ERJ2GEJ104	M 100KOHM, J,0.063W	1	
R1381	ERJ2GEJ474	M 470KOHM, J,0.063W	1	
R1384	ERJ2GEJ101	M 100 OHM, J,0.063W	1	
R1389	ERJ2GE0R00	M 0.0 OHM, J,0.063W	1	
R1408	ERJ2GEJ104	M 100KOHM, J,0.063W	1	
R1410	ERJ2GEJ102	M 1KOHM, J,0.063W	1	
R1411	ERJ2GEJ472	M 4.7KOHM, J,0.063W	1	
R1412,13	ERJ2GEJ104	M 100KOHM, J,0.063W	2	
R1414	ERJ2GE0R00	M 0.0 OHM, J,0.063W	1	
R1426-32	ERJ8GEY0R00	M 0 OHM, 1/8W	7	
R1436,37	ERJ2GEJ561	M 60 OHM, J,0.063W	2	
R1439	ERJ2GEJ271	M 270 OHM, J,0.063W	1	
R1441	ERJ2GE0R00	M 0.0 OHM, J,0.063W	1	
R1446,47	ERJ2GEJ471	M 470 OHM, J,0.063W	2	
R1449	ERJ2GEJ473	M 47KOHM, J, 0.063W	1	
R1451	ERJ2GEJ473	M 47KOHM,J,0.063W	1	
R1452	ERJ2GEJ473	M 47KOHM,J,0.063W	1	TH-50PV600E
R1452 R1454	ERJ2GE0R00	M 0.0 ОНМ, J,0.063W	1	111-301 ¥000E
R1454 R1458,59		M 100 OHM, J,0.063W	2	
•	ERJ2GEJ101			
R1461,62	ERJ2GE0R00	M 10/OHM 10 063W	2	
R1466	ERJ2GEJ103	M 10KOHM, J,0.063W	1	
R1467	ERJ2GEJ473	M 47KOHM,J,0.063W	1	
R1470	ERJ2GE0R00	M 0.0 OHM, J,0.063W	1	
R1472,73	ERJ2GEJ301	M 300 OHM, J,0.063W	2	

Ref. No.	Part No.	Part Name & Description	Pcs	Remarks
R1475	ERJ2GEJ271	M 270 OHM, J,0.063W	1	
R1478	ERJ2GEJ680	M 68 OHM, J,0.063W	1	
R1479	ERJ2GEJ473	M 47KOHM,J,0.063W	1	
R1480	ERJ2GEJ473	M 47KOHM,J,0.063W	1	TH-50PV600E
R1489	ERJ2GEJ473	M 47KOHM,J,0.063W	1	
R1491	ERJ2GE0R00	M 0.0 OHM, J,0.063W	1	
R1526	ERJ2GEJ102	M 1KOHM, J,0.063W	1	
R1530,31	ERJ2GE0R00	M 0.0 OHM, J,0.063W	2	
R1554,55	ERJ3GEY0R00	M 0 OHM, 1/16W	2	
R1556	ERJ2GEJ331	M 330 OHM, J,0.063W	1	
R2005	ERJ3GEYJ104	M 100KOHM,J,1/16W	1	
R2006-11	ERJ6GEYJ223	M 22KOHM,J,1/10W	6	
R2012	ERJ3GEYJ104	M 100KOHM,J,1/16W	1	
R2013,14	ERJ3GEYJ222	M 2.2KOHM,J,1/16W	2	
R2015,16	ERJ3GEYJ331	M 330 OHM,J,1/16W	2	
R2018,19	ERJ3GEYJ104	M 100KOHM,J,1/16W	2	
R2023	ERJ3GEYJ222	M 2.2KOHM,J,1/16W	1	
R2027,28	ERJ3GEYJ104	M 100KOHM,J,1/16W	2	
R2031	ERJ3GEYJ222	M 2.2KOHM,J,1/16W	1	
R2033	ERJ3GEYJ222	M 2.2KOHM,J,1/16W	1	
R2035,36	ERJ3GEYJ104	M 100KOHM,J,1/16W	2	
R2038	ERJ3GEYJ222	M 2.2KOHM,J,1/16W	1	
R2040	ERJ3GEYJ222	M 2.2KOHM,J,1/16W	1	
R2042	ERJ3GEYJ105	M 1MOHM,J,1/16W	1	
R2043	ERJ3GEYJ473	M 47KOHM,J,1/16W	1	
R2044	ERJ3GEYJ102	M 1KOHM,J,1/16W	1	
R2045,46	ERJ3GEYJ103	M 10KOHM,J,1/16W	2	
R2048	ERJ6GEYJ471	M 470 OHM,J,1/10W	1	
R2049,50	ERJ3GEYJ103	M 10KOHM,J,1/16W	2	
R2051,52	ERJ6GEYJ184	M 180KOHM,J,1/10W	2	
R2053	ERJ6GEYJ471	M 470 OHM,J,1/10W	1	
R2054	ERJ3GEYJ103	M 10KOHM,J,1/16W	1	
R2101,02	ERJ3GEYJ331	M 330 OHM,J,1/16W	2	
R2103	ERJ3GEYJ222	M 2.2KOHM,J,1/16W	1	
R2113,14	ERJ3GEY0R00	M 0 OHM, 1/16W	2	
R2116	J0JCC0000241	CHIP INDUCTOR	1	
R2110 R2124,25		M 100 OHM,J,1/16W	2	
	ERJ3GEYJ101 ERJ3GEYJ472	M 4.7KOHM,J,1/16W		
R2126,27		· · · · · · · · · · · · · · · · · · ·	2	
R2128,29	ERJ3GEYJ101	M 100 OHM,J,1/16W	2	
R2130	ERJ3EKF1002	M 10KOHM, 1/16W	1	
R2131	ERJ3EKF8201	M 8.2KOHM, 1/16W	1	
R2132	ERJ3GEYJ333	M 33KOHM,J,1/16W	1	
R2133	ERJ3GEY0R00	M 0 OHM, 1/16W	1	
R2135,36	ERJ3GEYJ331	M 330 OHM,J,1/16W	2	
R2137	ERJ3GEYJ333	M 33KOHM,J,1/16W	1	
R2138	ERJ3EKF1002	M 10KOHM, 1/16W	1	
R2139,40	ERJ3GEYJ221	M 220 OHM,J,1/16W	2	
R2147	ERJ3EKF1002	M 10KOHM, 1/16W	1	
R2148,49	ERJ3EKF6342	M6.34KOHM, 1/16W	2	
R2152	ERJ3GEYJ220	M 22 OHM,J,1/16W	1	
R2153	ERJ3GEYJ221	M 220 OHM,J,1/16W	1	
R2154	ERJ3GEYJ220	M 22 OHM,J,1/16W	1	
R2155-60	ERJ3GEYJ221	M 220 OHM,J,1/16W	6	
R2161	ERJ3GEYJ331	M 330 OHM,J,1/16W	1	

Ref. No.	Part No.	Part Name & Description	Pcs	Remarks
R2162	ERJ3GEYJ221	M 220 OHM,J,1/16W	1	
R2163	ERJ3GEYJ331	M 330 OHM,J,1/16W	1	
R2164	ERJ3GEYJ221	M 220 OHM,J,1/16W	1	
R2165,66	ERJ3GEYJ102	M 1KOHM,J,1/16W	2	
R2167	ERJ3GEYJ221	M 220 OHM,J,1/16W	1	
R2168,69	ERJ3GEYJ472	M 4.7KOHM,J,1/16W	2	
R2170-77	ERJ3GEYJ221	M 220 OHM,J,1/16W	8	
R2181	ERJ3GEY0R00	M 0 OHM, 1/16W	1	
R2182,83	ERJ3GEYJ101	M 100 OHM,J,1/16W	2	
R2184-87	ERJ3GEYJ221	M 220 OHM,J,1/16W	4	
R2188	ERJ3GEYJ103	M 10KOHM,J,1/16W	1	
R2190	ERJ3GEYJ221	M 220 OHM,J,1/16W	1	
R2192,93	ERJ3GEYJ221	M 220 OHM,J,1/16W	2	
R2195,96	ERJ3GEYJ104	M 100KOHM,J,1/16W	2	
R2197	ERJ3GEYJ471	M 470 OHM,J,1/16W	1	
R2199,00	ERJ3GEYJ221	M 220 OHM,J,1/16W	2	
R2202	ERJ3GEYJ101	M 100 OHM,J,1/16W	1	
R2203	ERJ6GEYJ101	M 100 OHM,J,1/10W	1	
R2204	ERJ6GEYJ561	M 560 OHM,J,1/10W	1	
R2208	ERJ6GEYJ471	M 470 OHM,J,1/10W	1	
R2209	ERJ3GEYJ332	M 3.3KOHM,J,1/16W	1	
R2210	ERJ6GEYJ122	M 1.2KOHM,J,1/10W	1	
R2211	ERJ3GEY0R00	M 0 OHM, 1/16W	1	
R2213	ERJ3GEYJ103	M 10KOHM,J,1/16W	1	
R2214	ERJ3GEYJ332	M 3.3KOHM,J,1/16W	1	
R2215	ERJ3GEY0R00	M 0 OHM, 1/16W	1	
R2219	ERJ6GEYJ101	M 100 OHM,J,1/10W	1	
R2220	ERJ3GEYJ153	M 15KOHM,J,1/16W	1	
R2224,25	ERJ3GEY0R00	M 0 OHM, 1/16W	2	
R2227	ERJ6GEY0R00	M 0 OHM, 1/10W	1	
R2230,31	ERJ3GEYJ104	M 100KOHM,J,1/16W	2	
R2232,33	ERJ3GEYJ153	M 15KOHM,J,1/16W	2	
R2234,35	ERJ3GEYJ103	M 10KOHM,J,1/16W	2	
R2236	ERJ3GEYJ473	M 47KOHM,J,1/16W	1	
R2237	ERJ3GEYJ103	M 10KOHM,J,1/16W	1	
R2238,39	ERJ3GEY0R00	M 0 OHM, 1/16W	2	
R2246	ERJ3EKF3602	M 36KOHM, 1/16W	1	
		M 1KOHM,J,1/10W		
R2300,01	ERJ6GEYJ102		2	/LIN
R2302	ERJ3GEYJ223	M 22KOHM, J, 1/16W	1	(H)
R2302	ERJ3GEYJ223	M 22KOHM, J, 1/16W	1	(PA)
R2303	ERJ3GEYJ433	M 43KOHM, J, 1/16W	1	(PA)
R2303	ERJ3GEYJ562	M 5.6KOHM,J,1/16W	1	(H)
R2304	ERJ3GEYJ104	M 100KOHM,J,1/16W	1	(T.N.)
R2305	ERJ3GEYJ223	M 22KOHM,J,1/16W	1	(PA)
R2305	ERJ3GEYJ471	M 470 OHM,J,1/16W	1	(H)
R2306	ERJ3GEYJ223	M 22KOHM,J,1/16W	1	(PA)
R2306	ERJ6GEYJ821	M 820 OHM,J,1/10W	1	(H)
R2307	ERJ3GEYJ104	M 100KOHM,J,1/16W	1	(H)
R2307	ERJ3GEYJ433	M 43KOHM,J,1/16W	1	(PA)
R2308,09	ERJ3GEYJ223	M 22KOHM,J,1/16W	2	
R2310	ERJ3GEY0R00	M 0 OHM, 1/16W	1	(PA)
R2310	ERJ3GEYJ184	M 180KOHM,J,1/16W	1	(H)
R2311	ERJ3GEY0R00	M 0 OHM, 1/16W	1	(PA)
R2311	ERJ6GEYJ182	M 1.8KOHM,J,1/10W	1	(H)

Ref. No.	Part No.	Part Name & Description	Pcs	Remarks
R2312	ERJ3EKF1002	M 10KOHM, 1/16W	1	
R2313,14	ERJ3GEYJ222	M 2.2KOHM,J,1/16W	2	
R2323,24	ERJ3GEY0R00	M 0 OHM, 1/16W	2	
R2325	ERJ3GEYJ103	M 10KOHM,J,1/16W	1	
R2328	ERJ3GEY0R00	M 0 OHM, 1/16W	1	
R2329	ERJ3EKF1003	M 100KOHM, 1/16W	1	
R2332	ERJ3GEYJ103	M 10KOHM,J,1/16W	1	
R2338	ERJ3GEY0R00	M 0 OHM, 1/16W	1	
R2341	ERJ6GEY0R00	M 0 OHM, 1/10W	1	
R2342,43	ERJ3GEY0R00	M 0 OHM, 1/16W	2	
R2346,47	ERJ3GEY0R00	M 0 OHM, 1/16W	2	
R2348	ERJ3EKF1003	M 100KOHM, 1/16W	1	
R2349,50	ERJ3GEYJ101	M 100 OHM,J,1/16W	2	
R2351	ERJ3GEYJ103	M 10KOHM,J,1/16W	1	
R2352	ERJ3GEY0R00	M 0 OHM, 1/16W	1	
R2353,02	ERJ3EKF1002	M 10KOHM, 1/16W	2	
R2354	ERJ3GEYJ102	M 1KOHM,J,1/16W	1	
R2355,56	ERJ3GEYJ222	M 2.2KOHM,J,1/16W	2	
R2357,58	ERJ6GEY0R00	M 0 OHM, 1/10W	2	
R2359	ERJ3GEYJ222	M 2.2KOHM,J,1/16W	1	
R2360	ERJ3GEYJ103	M 10KOHM,J,1/16W	1	
R2361	ERJ3GEYJ562	M 5.6KOHM,J,1/16W	1	
R2362	ERJ3GEYJ153	M 15KOHM,J,1/16W	1	
R2363	ERJ3GEYJ471	M 470 OHM,J,1/16W	1	
R2364	ERJ3GEYJ473	M 47KOHM,J,1/16W	1	
R2366	ERJ3GEYJ472	M 4.7KOHM,J,1/16W	1	
R2367	ERJ6GEYJ681	M 680 OHM,J,1/10W	1	
R2368	ERJ6GEY0R00	M 0 OHM, 1/10W	1	
R2372-74	ERJ6GEYJ681	M 680 OHM,J,1/10W	3	
R2376	ERJ3EKF1002	M 10KOHM, 1/16W	1	
R2377,78	ERJ3GEY0R00	M 0 OHM, 1/16W	2	
R2379,80	ERJ6ENF2201	M 2.2KOHM, 1/10W	2	
R2383	ERJ3EKF3741	M3.74KOHM, 1/16W	1	
R2384	ERJ3EKF7150	M 715 OHM, 1/16W	1	
R2387	ERJ3EKF7150	M 715 OHM, 1/16W	1	
R2388		· ·	1	(DA)
	ERJ3EKF3741	M3.74KOHM, 1/16W		(PA)
R2388	ERJ6GEYJ102	M 1KOHM, J, 1/10W	1	(H)
R2389	ERJ6GEYJ102	M 1KOHM,J,1/10W	1	
R2390	ERJ3GEYJ203	M 20KOHM,J,1/16W	1	(- •)
R2391	ERJ3EKF2801	M 2.8KOHM, 1/16W	1	(PA)
R2391	ERJ3GEYJ103	M 10KOHM,J,1/16W	1	(H)
R2392	ERJ3EKF1651	M1.65KOHM, 1/16W	1	(PA)
R2392	ERJ3GEYJ223	M 22KOHM,J,1/16W	1	(H)
R2393	ERJ3GEYJ103	M 10KOHM,J,1/16W	1	
R2395	ERJ3EKF2801	M 2.8KOHM, 1/16W	1	
R2396	ERJ3EKF1651	M1.65KOHM, 1/16W	1	(PA)
R2396	ERJ3GEYJ103	M 10KOHM,J,1/16W	1	(H)
R2397	ERJ3GEYJ473	M 47KOHM,J,1/16W	1	(H)
R2397	ERJ6GEY0R00	M 0 OHM, 1/10W	1	(PA)
R2398	ERJ3GEYJ123	M 12KOHM,J,1/16W	1	(H)
R2398	ERJ6GEY0R00	M 0 OHM, 1/10W	1	(PA)
R2399	ERJ3GEYJ102	M 1KOHM,J,1/16W	1	
R2400	ERJ6GEYJ182	M 1.8KOHM,J,1/10W	1	
R2401,02	ERJ3GEYJ331	M 330 OHM,J,1/16W	2	

Ref. No.	Part No.	Part Name & Description	Pcs	Remarks
R2403	ERJ3GEYJ472	M 4.7KOHM,J,1/16W	1	
R2404,05	ERJ3GEYJ331	M 330 OHM,J,1/16W	2	
R2406	ERJ3GEYJ472	M 4.7KOHM,J,1/16W	1	
R2407	ERJ3EKF1241	M1.24KOHM, 1/16W	1	
R2408	ERJ3EKF1071	M1.07KOHM, 1/16W	1	
R2409	ERJ3EKF1621	M1.62KOHM, 1/16W	1	
R2410	ERJ3EKF7870	M 787 OHM, 1/16W	1	
R2411,12	ERJ3GEYJ331	M 330 OHM,J,1/16W	2	
R2413	ERJ3GEYJ472	M 4.7KOHM,J,1/16W	1	
R2414,15	ERJ3GEYJ331	M 330 OHM,J,1/16W	2	
R2416	ERJ3GEYJ472	M 4.7KOHM,J,1/16W	1	
R2417	ERJ3EKF1241	M1.24KOHM, 1/16W	1	
R2418	ERJ3EKF1001	M 1KOHM, 1/16W	1	
R2419	ERJ3EKF1501	M 1.5KOHM, 1/16W	1	
R2420	ERJ3EKF7870	M 787 OHM, 1/16W	1	
R2421	ERJ3EKF1621	M1.62KOHM, 1/16W	1	
R2422	ERJ3EKF7870	M 787 OHM, 1/16W	1	
R2423	ERJ3EKF1501	M 1.5KOHM, 1/16W	1	
R2424	ERJ3EKF7870	M 787 OHM, 1/16W	1	
R2512	ERJ6GEYJ470	M 47 OHM,J,1/10W	1	
R2516	ERJ3GEYJ223	M 22KOHM,J,1/16W	1	
R2517	ERJ6GEYJ470	M 47 OHM,J,1/10W	1	
R2520	ERJ3GEYJ224	M 220KOHM,J,1/16W	1	
R2521	ERJ6GEYJ470	M 47 OHM,J,1/10W	1	
R2524	ERJ3GEYJ223	M 22KOHM,J,1/16W	1	
R2539	ERJ3GEYJ473	M 47KOHM,J,1/16W	1	TH-50PX600B
R2540	ERJ3GEYJ223	M 22KOHM,J,1/16W	1	TH-50PX600B
R2542	ERJ3GEYJ473	M 47KOHM,J,1/16W	1	TH GOL XOOD
R2554	ERJ6ENF75R0	M 75 OHM, 1/10W	1	TH-50PX600B
R2557	ERJ3GEYJ562	M 5.6KOHM,J,1/16W	1	111 301 X000B
R2559	ERJ6GEY0R00	M 0 OHM, 1/10W	1	
R2560	ERJ3EKF5760	M 576 OHM, 1/16W	1	
R2567	ERJ6GEY0R00	M 0 OHM, 1/10W	1	TH-50PX600B
R2572	ERJ6GEY0R00	M 0 OHM, 1/10W	1	TH-50PX600B
	ERJ6ENF1500	<u> </u>	2	TH-30FX000B
R3001,02 R3003-05		M 150 OHM, 1/10W	3	
	ERJ6ENF75R0	M 75 OHM, 1/10W		
R3006-08	ERJ6ENF1500	M 150 OHM, 1/10W	3	
R3009-15	ERJ6ENF75R0	M 75 OHM, 1/10W	7	
R3016,17	ERJ6GEYJ101	M 100 OHM,J,1/10W	2	
R3018,19	ERJ6GEYJ680	M 68 OHM,J,1/10W	2	
R3020-22	ERJ6ENF2202	M 2.2KOHM, 1/10W	3	
R3023,24	ERJ6ENF1202	M 12KOHM, 1/10W	2	
R3025	ERJ3GEYJ103	M 10KOHM,J,1/16W	1	
R3026	ERJ3GEYJ473	M 47KOHM,J,1/16W	1	
R3027,28	ERJ6ENF1500	M 150 OHM, 1/10W	2	
R3030-32	ERJ3GEY0R00	M 0 OHM, 1/16W	3	
R3033,34	ERJ6ENF1500	M 150 OHM, 1/10W	2	
R3036	ERJ6ENF1500	M 150 OHM, 1/10W	1	
R3041,42	ERJ3GEYJ182	M 1.8KOHM,J,1/16W	2	
R3043	ERJ3GEYJ331	M 330 OHM,J,1/16W	1	
R3044,45	ERJ3GEY0R00	M 0 OHM, 1/16W	2	
R3048	ERJ3GEYJ223	M 22KOHM,J,1/16W	1	
R3049	ERJ3GEYJ221	M 220 OHM,J,1/16W	1	
R3050	ERJ3GEYJ242	M 2.4KOHM,J,1/16W	1	

Ref. No.	Part No.	Part Name & Description	Pcs	Remarks
R3051	ERJ3GEYJ682	M 6.8KOHM,J,1/16W	1	
R3052	ERJ3GEY0R00	M 0 OHM, 1/16W	1	
R3057,58	ERJ3GEY0R00	M 0 OHM, 1/16W	2	
R3059-64	ERJ3GEYJ221	M 220 OHM,J,1/16W	6	
R3068	ERJ6ENF75R0	M 75 OHM, 1/10W	1	
R3070	ERJ3GEYJ102	M 1KOHM,J,1/16W	1	
R3072-75	ERJ3GEYJ221	M 220 OHM,J,1/16W	4	
R3076	ERJ3GEY0R00	M 0 OHM, 1/16W	1	
R3077	ERJ3GEYJ221	M 220 OHM,J,1/16W	1	
R3078	ERJ3GEY0R00	M 0 OHM, 1/16W	1	
R3085-88	ERJ3GEYJ221	M 220 OHM,J,1/16W	4	
R3089,90	ERJ3GEYJ220	M 22 OHM,J,1/16W	2	
R3092	ERJ3GEYJ221	M 220 OHM,J,1/16W	1	
R3094-01	ERJ3GEYJ221	M 220 OHM,J,1/16W	8	
R3102	ERJ3GEYJ682	M 6.8KOHM,J,1/16W	1	
R3103	ERJ3GEYJ222	M 2.2KOHM,J,1/16W	1	
R3105	ERJ3GEYJ332	M 3.3KOHM,J,1/16W	1	
R3107	ERJ3GEYJ103	M 10KOHM,J,1/16W	1	
R3109	ERJ3GEYJ331	M 330 OHM,J,1/16W	1	
R3111-14	ERJ3GEY0R00	M 0 OHM, 1/16W	4	
R3115	ERJ3GEYJ101	M 100 OHM,J,1/16W	1	
R3118	ERJ3GEYJ101	M 100 OHM,J,1/16W	1	
R3119,20	ERJ3EKF91R0	M 91 OHM, 1/16W	2	
R3121	ERJ3EKF1300V	M 130 OHM, 1/16W	1	
R3122	ERJ3GEYJ101	M 100 OHM,J,1/16W	1	
R3123	ERJ3EKF1000	M 100 OHM, 1/16W	1	
R3125	ERJ6GEYJ102	M 1KOHM,J,1/10W	1	
R3126	ERJ3GEYJ101	M 100 OHM,J,1/16W	1	
R3127	ERJ6GEYJ102	M 1KOHM,J,1/10W	1	
R3130,31	ERJ3GEYJ101	M 100 OHM,J,1/16W	2	
R3132,33	ERJ3GEYJ103	M 10KOHM,J,1/16W	2	
R3134	ERJ3GEYJ333	M 33KOHM,J,1/16W	1	
R3135	ERJ3EKF91R0	M 91 OHM, 1/16W	1	
R3136	ERJ3GEYJ333	M 33KOHM, J,1/16W	1	
R3138	ERJ3EKF1000	M 100 OHM, 1/16W	1	
R3139	ERJ6GEYJ102	· · · · · · · · · · · · · · · · · · ·	1	
R3140	ERJ3EKF1300V	M 1KOHM,J,1/10W M 130 OHM, 1/16W	1	
R3141		M 1KOHM,J,1/10W	1	
	ERJ6GEYJ102	<u> </u>		
R3143	ERJ6ENF75R0	M 75 OHM, 1/10W	1	
R3144	ERJ3GEYJ221	M 220 OHM,J,1/16W	1	
R3145	ERJ3GEYJ104	M 100KOHM,J,1/16W	1	
R3146	ERJ3GEYJ361	M 360 OHM,J,1/16W	1	
R3149	ERJ3GEYJ361	M 360 OHM,J,1/16W	1	
R3150	ERJ6ENF75R0	M 75 OHM, 1/10W	1	
R3151	ERJ3GEYJ221	M 220 OHM,J,1/16W	1	
R3152	ERJ3GEYJ104	M 100KOHM,J,1/16W	1	
R3153,54	ERJ3GEYJ361	M 360 OHM,J,1/16W	2	
R3155	ERJ6ENF75R0	M 75 OHM, 1/10W	1	
R3156	ERJ3GEYJ221	M 220 OHM,J,1/16W	1	
R3157	ERJ3GEYJ104	M 100KOHM,J,1/16W	1	
R3158,59	ERJ3GEYJ361	M 360 OHM,J,1/16W	2	
R3160,61	ERJ6GEYJ102	M 1KOHM,J,1/10W	2	
R3163	ERJ6ENF1202	M 12KOHM, 1/10W	1	
R3168	ERJ3GEYJ750	M 75 OHM,J,1/16W	1	

Ref. No.	Part No.	Part Name & Description	Pcs	Remarks
R3170	ERJ3GEY0R00	M 0 OHM, 1/16W	1	
R3171	ERJ3GEYJ471	M 470 OHM,J,1/16W	1	
R3173	ERJ3GEYJ271	M 270 OHM,J,1/16W	1	
R3206	ERJ3GEYJ101	M 100 OHM,J,1/16W	1	
R3213,14	ERJ3GEY0R00	M 0 OHM, 1/16W	2	
R3215	J0JCC0000241	CHIP INDUCTOR	1	
R3222	ERJ3GEY0R00	M 0 OHM, 1/16W	1	
R3224	ERJ3GEY0R00	M 0 OHM, 1/16W	1	
R3227-29	ERJ3GEY0R00	M 0 OHM, 1/16W	3	
R3233,34	ERJ6ENF75R0	M 75 OHM, 1/10W	2	
R3236	ERJ6ENF75R0	M 75 OHM, 1/10W	1	
R3238	ERJ3GEY0R00	M 0 OHM, 1/16W	1	
R3239	ERJ3GEYJ683	M 68KOHM,J,1/16W	1	
R3245-48	ERJ3GEY0R00	M 0 OHM, 1/16W	4	
R3249	J0JCC0000241	CHIP INDUCTOR	1	
R3302	ERJ6GEYJ101	M 100 OHM,J,1/10W	1	
R3305	ERJ6GEYJ101	M 100 OHM,J,1/10W	1	
R3306,07	ERJ6GEYJ472	M 4.7KOHM,J,1/10W	2	
R3308,09	ERJ6GEY0R00	M 0 OHM, 1/10W	2	
R3310	ERJ6ENF75R0	M 75 OHM, 1/10W	1	
R3312	ERJ3GEYJ103	M 10KOHM,J,1/16W	1	
R3313	ERJ6ENF75R0	M 75 OHM, 1/10W	1	
R3317	ERJ3GEYJ103	M 10KOHM,J,1/16W	1	
R3318	ERJ6ENF75R0	M 75 OHM, 1/10W	1	
R3320	ERJ6GEY0R00	M 0 OHM, 1/10W	1	
R3323,24	ERJ6GEY0R00	M 0 OHM, 1/10W	2	
R3330	ERJ3GEY0R00	M 0 OHM, 1/16W	1	
R3336	ERJ3GEYJ473	M 47KOHM,J,1/16W	1	
R3337	ERJ3GEYJ183	M 18KOHM,J,1/16W	1	
R3338	ERJ3GEYJ101	M 100 OHM,J,1/16W	1	
R3339	ERJ3GEYJ471	M 470 OHM,J,1/16W	1	
R3340	ERJ3GEYJ101	M 100 OHM,J,1/16W	1	
R3341	ERJ3GEYJ473	M 47KOHM,J,1/16W	1	
R3342	ERJ3GEYJ183	M 18KOHM,J,1/16W	1	
R3343	ERJ3GEYJ471	M 470 OHM,J,1/16W	1	
R3344	ERJ3GEYJ101	M 100 OHM,J,1/16W	1	
R3345	ERJ3GEYJ183	M 18KOHM,J,1/16W	1	
R3346	ERJ3GEYJ473	M 47KOHM,J,1/16W	1	
R3347	ERJ3GEYJ471	M 470 OHM,J,1/16W	1	
R3348,49	ERJ3GEYJ680	M 68 OHM,J,1/16W	2	
R3350-52	ERJ3GEYJ510	M 51 OHM,J,1/16W	3	
R3704	ERJ3GEY0R00	M 0 OHM, 1/16W	1	
R3709-11	ERJ3GEY0R00	M 0 OHM, 1/16W	3	
R3716,17	ERJ6GEYJ184	M 180KOHM, J,1/10W	2	
R3710,17		M 10KOHM,J,1/10W	1	
	ERJ6GEYJ103			
R3732	ERJ3GEY0R00	M 0 OHM, 1/16W	1	
R3733	ERJ6GEY0R00	M 0 OHM, 1/10W	1	
R3736-41	ERJ3GEY0R00	M 0 OHM, 1/16W	6	
R3746	ERJ6GEY0R00	M 0 OHM, 1/10W	1	
R3748	ERJ6GEY0R00	M 0 OHM, 1/10W	1	
R3750	ERJ6GEY0R00	M 0 OHM, 1/10W	1	
R3751 R3753	ERJ6ENF1432	M14.3KOHM, 1/10W	1	
	ERJ6ENF1741	M1.74KOHM, 1/10W	1 1	

Ref. No.	Part No.	Part Name & Description	Pcs	Remarks
R3755	ERJ6GEY0R00	M 0 OHM, 1/10W	1	
R3757	ERJ6GEY0R00	M 0 OHM, 1/10W	1	
R3758	ERJ6ENF6651	M6.65KOHM, 1/10W	1	
R3759-64	ERJ6GEY0R00	M 0 OHM, 1/10W	6	
R3765	ERJ6ENF2321	M2.32KOHM, 1/10W	1	
R3767	ERJ6ENF3161	M3.16KOHM, 1/10W	1	
R3768	ERJ6GEY0R00	M 0 OHM, 1/10W	1	
R4001	ERJ3EKF1211	M1.21KOHM, 1/16W	1	
R4004	ERJ2GE0R00	M 0.0 OHM, J,0.063W	1	
R4008	ERJ2GE0R00	M 0.0 OHM, J,0.063W	1	
R4010	ERJ2GE0R00	M 0.0 OHM, J,0.063W	1	
R4018	ERJ2GEJ103	M 10KOHM, J,0.063W	1	TH-50PV600E
R4021	ERJ2GE0R00	M 0.0 OHM, J,0.063W	1	
R4022	ERJ2GEJ102	M 1KOHM, J,0.063W	1	
R4024,25	ERJ2GE0R00	M 0.0 OHM, J,0.063W	2	
R4026,27	ERJ2GEJ102	M 1KOHM, J,0.063W	2	
R4029	ERJ2GEJ220	M 22 OHM, J,0.063W	1	
R4031-33	ERJ2GEJ103	M 10KOHM, J,0.063W	3	
R4037-39	D1HG1038A002	NETWORK RESISTER	3	
R4040,41	ERJ2GE0R00	M 0.0 OHM, J,0.063W	2	
R4045,46	ERJ3GEY0R00	M 0 OHM, 1/16W	2	
R4101	ERJ2GEJ103	M 10KOHM, J,0.063W	1	
R4257	ERJ3EKF3302	M 33KOHM, 1/16W	1	
R4265	ERJ3EKF3242	M32.4KOHM, 1/16W	1	
R4269	ERJ2GE0R00	M 0.0 OHM, J,0.063W	1	
R4271,72	ERJ2GE0R00	M 0.0 OHM, J,0.063W	2	
R4286,87	ERJ2GE0R00	M 0.0 OHM, J,0.063W	2	
R4293	ERJ2GE0R00	<u> </u>	1	
R4338-43		M 0.0 OHM, J,0.063W		
	ERJ2GE0R00	M 0.0 OHM, J,0.063W	1	
R4434	ERJ2GE0R00	M 0.0 OHM, J,0.063W		
R4436	ERJ2GE0R00	M 0.0 OHM, J,0.063W	1	
R4438	ERJ2GE0R00	M 0.0 OHM, J,0.063W	1	
R4442,43	ERJ3EKF4220	M 422 OHM, 1/10W	2	
R4444,45	ERJ3EKF3301	M 3.3KOHM, 1/16W	2	
R4447	ERJ3EKF7680	M 768 OHM, 1/16W	1	
R4449	ERJ3EKF1211	M1.21KOHM, 1/16W	1	
R4450,51	ERJ6GEYJ821	M 820 OHM,J,1/10W	2	
R4454	ERJ6GEYJ681	M 680 OHM,J,1/10W	1	
R4457	ERJ2GE0R00	M 0.0 OHM, J,0.063W	1	
R4465	ERJ2GEJ224	M 220KOHM, J,0.063W	1	
R4466,67	ERJ2GEJ330	M 33 OHM, J,0.063W	2	
R4469,70	ERJ3EKF1500	M 150 OHM, 1/16W	2	
R4472	ERJ2GE0R00	M 0.0 OHM, J,0.063W	1	TH-50PX600B
R4474	ERJ3EKF1211	M1.21KOHM, 1/16W	1	
R4476	ERJ2GEJ330	M 33 OHM, J,0.063W	1	
R4477,78	ERJ6GEYJ471	M 470 OHM,J,1/10W	2	
R4479,80	ERJ3EKF4220	M 422 OHM, 1/10W	2	
R4481	ERJ3EKF2201	M 2.2KOHM, 1/16W	1	
R4482,83	ERJ3EKF1781	M1.78KOHM, 1/16W	2	
R4484,85	ERJ2GE0R00	M 0.0 OHM, J,0.063W	2	
R4486	ERJ3EKF4870	M 487 OHM, 1/16W	1	
R4487	ERJ3EKF5600	M 560 OHM, 1/16W	1	
R4488	ERJ3EKF2201	M 2.2KOHM, 1/16W	1	
R4489	ERJ6GEYJ331	M 330 OHM,J,1/10W	1	

Ref. No.	Part No.	Part Name & Description	Pcs	Remarks
R4490	ERJ6GEYJ102	M 1KOHM,J,1/10W	1	
R4491	ERJ2GE0R00	M 0.0 OHM, J,0.063W	1	
R4492	ERJ6GEYJ102	M 1KOHM,J,1/10W	1	
R4495	ERJ3EKF4302	M 43KOHM, 1/16W	1	
R4496-99	ERJ6GEYJ102	M 1KOHM,J,1/10W	4	
R4500	ERJ3EKF2702V	M27.0KOHM, 1/16W	1	
R4501,02	ERJ6GEYJ102	M 1KOHM,J,1/10W	2	
R4503	ERJ3EKF1600	M 160 OHM, 1/16W	1	
R4505	ERJ2GEJ103	M 10KOHM, J,0.063W	1	
R4506	ERJ2GE0R00	M 0.0 OHM, J,0.063W	1	
R4508	ERJ2GE0R00	M 0.0 OHM, J,0.063W	1	
R4510	ERJ2GE0R00	M 0.0 OHM, J,0.063W	1	
R4514-16	ERJ2GE0R00	M 0.0 OHM, J,0.063W	3	
R4517	ERJ3EKF1371	M 13.7 OHM, 1/16W	1	
R4519	ERJ2GE0R00	M 0.0 OHM, J,0.063W	1	
R4520	ERJ3EKF1691	M1.69KOHM, 1/16W	1	
R4521,22	ERJ2GEJ220	M 22 OHM, J,0.063W	2	
R4523-25	ERJ3EKF33R0	M 33 OHM, 1/16W	3	
R4526	ERJ3EKF1401	M 1.4KOHM, 1/16W	1	
R4527	ERJ2GEJ220	M 22 OHM, J,0.063W	1	
R4528-30	ERJ3EKF33R0	M 33 OHM, 1/16W	3	
R4531	ERJ3EKF2701	M 2.7KOHM, 1/16W	1	
R4532	ERJ3EKF4700	M 470 OHM, 1/16W	1	
R4533	ERJ2GEJ220	M 22 OHM, J,0.063W	1	
R4534,35	ERJ2GEJ101	M 100 OHM, J,0.063W	2	
R4536-38	ERJ3EKF1500	M 150 OHM, 1/16W	3	
R4539	ERJ3EKF1001	M 1KOHM, 1/16W	1	
R4541	ERJ2GE0R00	M 0.0 OHM, J,0.063W	1	
R4543	ERJ2GE0R00	M 0.0 OHM, J,0.063W	1	
R4544	ERJ2GEJ220	M 22 OHM, J,0.063W	1	
R4545-47	ERJ2GE0R00	M 0.0 OHM, J,0.063W	3	
R4548	ERJ2GEJ911X	M 910 OHM, J,0.063W	1	
R4549	ERJ2GE0R00	M 0.0 OHM, J,0.063W	1	
R4550	EXB28V220J	RESISTOR ARRAY	1	
R4551	ERJ2GE0R00	M 0.0 OHM, J,0.063W	1	
R4552	EXB28V220J	RESISTOR ARRAY	1	
R4553		M 100 OHM, J,0.063W	1	
	ERJ2GEJ101	M 22 OHM, J,0.063W	1	
R4554	ERJ2GEJ220			
R4555	EXB28V220J	RESISTOR ARRAY	1	
R4556,57	ERJ2GEJ220	M 22 OHM, J,0.063W	2	
R4560,61	EXB28V220J	RESISTOR ARRAY	2	
R4562	ERJ2GEJ560	M 56 OHM, J,0.063W	1	
R4563-65	ERJ2GEJ220	M 22 OHM, J,0.063W	3	
R4566	ERJ2GEJ560	M 56 OHM, J,0.063W	1	
R4567	ERJ2GEJ470	M 47 OHM, J,0.063W	1	
R4568	ERJ2GEJ101	M 100 OHM, J,0.063W	1	
R4569	D1HG5608A002	NETWORK RESISTER	1	
R4570,71	EXB28V560JX	RESISTOR ARRAY	2	
R4572	ERJ2GEJ103	M 10KOHM, J,0.063W	1	
R4575	ERJ2GEJ472	M 4.7KOHM, J,0.063W	1	
R4577-79	ERJ2GEJ222	M 2.2KOHM, J,0.063W	3	
R4583,84	ERJ2GEJ390	M 39 OHM, J,0.063W	2	
R4589-04	ERJ2GEJ2R7X	M 2.7OHM, J,0.063W	16	
R4605,06	ERJ2GEJ103	M 10KOHM, J,0.063W	2	

Ref. No.	Part No.	Part Name & Description	Pcs	Remarks
R4607	ERJ2GEJ220	M 22 OHM, J,0.063W	1	
R4609,10	ERJ2GEJ103	M 10KOHM, J,0.063W	2	
R4612,13	ERJ2GEJ472	M 4.7KOHM, J,0.063W	2	
R4617,18	ERJ2GEJ472	M 4.7KOHM, J,0.063W	2	
R4619	ERJ2GEJ473	M 47KOHM,J,0.063W	1	
R4620	ERJ2GEJ560	M 56 OHM, J,0.063W	1	
R4621	ERJ2GEJ473	M 47KOHM,J,0.063W	1	
R4622	ERJ2GEJ560	M 56 OHM, J,0.063W	1	
R4624	ERJ2GEJ560	M 56 OHM, J,0.063W	1	
R4626	ERJ2GEJ560	M 56 OHM, J,0.063W	1	
R4628	ERJ2GEJ103	M 10KOHM, J,0.063W	1	
R4629-32	ERJ2GEJ472	M 4.7KOHM, J,0.063W	4	
R4633,34	ERJ2GEJ220	M 22 OHM, J,0.063W	2	
R4636	ERJ2GEJ103	M 10KOHM, J,0.063W	1	
R4637	ERJ2GEJ330	M 33 OHM, J,0.063W	1	
R4639	ERJ2GEJ103	M 10KOHM, J,0.063W	1	
R4640	ERJ2GEJ220	M 22 OHM, J,0.063W	1	
R4641	EXB28V330J	RESISTOR ARRAY	1	
R4642-45	ERJ2GEJ220	M 22 OHM, J,0.063W	4	
R4647	ERJ2GEJ220	M 22 OHM, J,0.063W	1	
R4648	ERJ2GEJ330	M 33 OHM, J,0.063W	1	
R4655	ERJ2GEJ330	M 33 OHM, J,0.063W	1	
R4657	ERJ2GEJ182	M 1.8KOHM, J,0.063W	1	
R4658	ERJ2GEJ220	M 22 OHM, J,0.063W	1	
R4660	ERJ2GEJ220	M 22 OHM, J,0.063W	1	
R4661	ERJ2GEJ472	M 4.7KOHM, J,0.063W	1	
R4662	ERJ2GEJ220	M 22 OHM, J,0.063W	1	
R4665	EXB2HV220JV	RESISTOR ARRAY	1	
R4667	EXB2HV220JV	RESISTOR ARRAY	1	
R4668	ERJ2GEJ680	M 68 OHM, J,0.063W	1	
R4669	EXB2HV220JV	RESISTOR ARRAY	1	
R4672,73	ERJ2GEJ103	M 10KOHM, J,0.063W	2	
R4675	ERJ3EKF1802	M 18KOHM, 1/16W	1	
R4677	ERJ3EKF1802	M 18KOHM, 1/16W	1	
R4679,80	ERJ3EKF2202	M 22KOHM, 1/16W	2	
R4681,82	ERJ3EKF3302	M 33KOHM, 1/16W	2	
R4701	ERJ2GEJ680	M 68 OHM, J,0.063W	1	
R4706	ERJ2GE0R00	M 0.0 OHM, J,0.063W	1	
R4708,09	ERJ2GEJ680	M 68 OHM, J,0.063W	2	
R4711	ERJ2GEJ103	M 10KOHM, J,0.063W	1	
R4712	ERJ2GE0R00	M 0.0 OHM, J,0.063W	1	
R4713,14	EXB2HV221JV	RESISTOR ARRAY	2	
R4715	ERJ2GE0R00	M 0.0 OHM, J,0.063W	1	
R4718-20	ERJ2GEJ680	M 68 OHM, J,0.063W	3	
R4710-20 R4727	ERJ2GE0R00	M 0.0 OHM, J,0.063W	1	
R4729,30	ERJ3EKF1000	M 100 OHM, 1/16W	2	
R4729,30 R4731	ERJ3EKF1000	M 1KOHM, 1/16W	1	
R4731		M4.75KOHM, 1/16W	1	
R4732 R4733	ERJ3EKF4751	M 0.75HM, 1/16W	1	
	ERJ3EKF75R0	•		
R4734	ERJ2GEJ223	M 22KOHM, J,0.063W	1	
R4735	ERJ3EKF2001	M 2 KOHM, 1/16W	1	
R4737	ERJ2GE0R00	M 0.0 OHM, J,0.063W	1	
R4738,39	ERJ2GEJ332	M 3.3KOHM, J,0.063W M 68 OHM, J,0.063W	5	

Ref. No.	Part No.	Part Name & Description	Pcs	Remarks
R4749,50	EXB2HV680J	RESISTOR ARRAY	2	
R4751-54	ERJ2GEJ220	M 22 OHM, J,0.063W	4	
R4756-60	ERJ2GEJ680	M 68 OHM, J,0.063W	5	
R4762	EXB2HV680J	RESISTOR ARRAY	1	
R4763-65	ERJ2GE0R00	M 0.0 OHM, J,0.063W	3	
R4772	EXB2HV470JV	RESISTOR ARRAY	1	
R4773	ERJ2GEJ470	M 47 OHM, J,0.063W	1	
R4774	EXB2HV470JV	RESISTOR ARRAY	1	
R4775	ERJ2GEJ470	M 47 OHM, J,0.063W	1	
R4776	EXB2HV470JV	RESISTOR ARRAY	1	
R4777	ERJ2GEJ470	M 47 OHM, J,0.063W	1	
R4778	EXB2HV470JV	RESISTOR ARRAY	1	
R4779	ERJ2GEJ470	M 47 OHM, J,0.063W	1	
R4782	ERJ2GEJ220	M 22 OHM, J,0.063W	1	
R4783	ERJ2GEJ472	M 4.7KOHM, J,0.063W	1	
R4784	ERJ2GEJ220	M 22 OHM, J,0.063W	1	
R4785	ERJ2GEJ472	M 4.7KOHM, J,0.063W	1	
R4788	EXB2HV470JV	RESISTOR ARRAY	1	
R4791,92	ERJ2GEJ470	M 47 OHM, J,0.063W	2	
R4793,94	ERJ2GEJ220	M 22 OHM, J,0.063W	2	
R4796	EXB2HV470JV	RESISTOR ARRAY	1	
R4804	ERJ2GEJ101	M 100 OHM, J,0.063W	1	
R4805,06	ERJ3EKF1001	M 1KOHM, 1/16W	2	
R4807-11	ERJ2GE0R00	M 0.0 OHM, J,0.063W	5	
R4814	ERJ2GEJ103	M 10KOHM, J,0.063W	1	
R4816,17	ERJ2GEJ223	M 22KOHM, J,0.063W	2	
R4819	ERJ2GEJ223	M 22KOHM, J,0.063W	1	
R4822	ERJ2GEJ103	M 10KOHM, J,0.063W	1	
R4823-25	J0JAD0000025	CHIP INDUCTOR	3	
R4826,27	EXB2HVR000	RESISTOR ARRAY	2	TH-50PX600B
R4830,31	ERJ2GE0R00	M 0.0 OHM, J,0.063W	2	TH-50PX600B
R4837	ERJ2GEJ220	M 22 OHM, J,0.063W	1	
R4838	ERJ2GEJ112	M 1.1KOHM, J.0.063W	1	
R4840	ERJ2GE0R00	M 0.0 OHM, J,0.063W	1	TH-50PX600B
R4891	ERJ2GE0R00	M 0.0 OHM, J,0.063W	1	111 001 X000B
R4898	ERJ2GEJ103	M 10KOHM, J,0.063W	1	
R4960	EXB2HV680J	RESISTOR ARRAY	1	
R4961-63	ERJ2GEJ680	M 68 OHM, J,0.063W	3	
R4964	EXB2HV680J	RESISTOR ARRAY	1	
R4965,66 R4967	ERJ2GEJ680	M 68 OHM, J,0.063W RESISTOR ARRAY	1	
	EXB2HV680J			
R4968-72	ERJ2GEJ680	M 68 OHM, J,0.063W	5 1	
R5601	ERJ3EKF1800	M 180 OHM, 1/16W M15.4KOHM, 1/16W		
R5603	ERJ3EKF1542	· ·	1	
R5605	ERJ3GEYJ472	M 4.7KOHM,J,1/16W	1	
R5606	ERJ3GEYJ222	M 2.2KOHM, J,1/16W	1	
R5607	ERJ3EKF4531	M4.53KOHM, 1/16W	1	
R5609	ERJ3EKF2000	M 200 OHM, 1/16W	1	
R5611	ERJ6ENF8202	M 82KOHM, 1/10W	1	
R5612	ERJ6ENF1602	M 16KOHM, 1/10W	1	
R5615	ERJ3GEYJ103	M 10KOHM,J,1/16W	1	
R5617	ERJ3GEYJ102	M 1KOHM,J,1/16W	1	
R5619	ERJ3GEYJ333	M 33KOHM,J,1/16W	1	1

Ref. No.	Part No.	Part Name & Description	Pcs	Remarks
R5621	ERJ3GEYJ472	M 4.7KOHM,J,1/16W	1	
R5625-27	ERJ3GEYJ472	M 4.7KOHM,J,1/16W	3	
R5632	ERJ3GEYJ471	M 470 OHM,J,1/16W	1	
R5633	ERJ3GEYJ102	M 1KOHM,J,1/16W	1	
R5634	ERJ3GEYJ471	M 470 OHM,J,1/16W	1	
R5635	ERJ3GEYJ221	M 220 OHM,J,1/16W	1	
R5637,38	ERJ3GEYJ103	M 10KOHM,J,1/16W	2	
R5639	ERJ3GEYJ222	M 2.2KOHM,J,1/16W	1	
R5640	ERJ3GEYJ472	M 4.7KOHM,J,1/16W	1	
R5641	ERJ3GEYJ222	M 2.2KOHM,J,1/16W	1	
R5642	ERJ3GEYJ471	M 470 OHM,J,1/16W	1	
R5643	ERJ3GEYJ102	M 1KOHM,J,1/16W	1	
R5644	ERJ3GEYJ222	M 2.2KOHM,J,1/16W	1	
R5645	ERJ3EKF2201	M 2.2KOHM, 1/16W	1	
R5646	ERJ3EKF4701	M 4.7KOHM, 1/16W	1	
R5647	ERJ3GEYJ221	M 220 OHM,J,1/16W	1	
R5648	ERJ3GEYJ392	M 3.9KOHM,J,1/16W	1	
R5649	ERJ3GEYJ104	M 100KOHM,J,1/16W	1	
R5650	ERJ3GEYJ221	M 220 OHM,J,1/16W	1	
R5652	ERJ3GEY0R00	M 0 OHM, 1/16W	1	
R5653,54	ERJ3GEYJ103	M 10KOHM,J,1/16W	2	
R5659	ERJ3EKF4700	M 470 OHM, 1/16W	1	
R5660	ERJ3GEY0R00	M 0 OHM, 1/16W	1	
R5662	ERJ3GEYJ472	M 4.7KOHM,J,1/16W	1	
R5664	ERJ3GEYJ472	M 4.7KOHM,J,1/16W	1	
R5665	ERJ3GEYJ473	M 47KOHM,J,1/16W	1	
R5667-69	ERJ3GEYJ473	M 47KOHM,J,1/16W	3	
R5672	ERJ3GEYJ103	M 10KOHM,J,1/16W	1	
R5676	ERJ3GEYJ103	M 10KOHM,J,1/16W	1	
R5692	ERJ3GEYJ102	M 1KOHM,J,1/16W	1	
R5693	ERJ3GEYJ333	M 33KOHM,J,1/16W	1	
R5694	ERJ3GEYJ473	M 47KOHM,J,1/16W	1	
R5695	ERJ3GEYJ103	M 10KOHM,J,1/16W	1	
R5801	ERJ3EKF8450	M 845 OHM, 1/16W	1	
R5802	ERJ3EKF1302	M 23KOHM, 1/16W	1	
R5803	ERJ3EKF2001	M 2KOHM, 1/16W	1	
R5804	ERJ3GEY0R00	M 0 OHM, 1/16W	1	
R5805-08	ERJ3GEYJ222	M 2.2KOHM,J,1/16W	4	
R5809	ERJ3GEYJ472	M 4.7KOHM,J,1/16W	1	
R5822-24	ERJ3GEYJ101	M 100 OHM,J,1/16W	3	
R5826	ERJ3GEYJ101	M 100 OHM,J,1/16W	1	
R5836	ERJ3GEYJ102	M 1KOHM,J,1/16W	1	
R6001-06	ERJ14YJ150U	M 15 OHM, J,1/4W	6	
R6020	ERG3FJS101D	M 100 OHM, J, 3W	1	
R6021	ERJ14YJ150U	M 15 OHM, J,1/4W	1	
R6022	ERG3FJS101D	M 100 OHM, J, 3W	1	
R6022	ERJ14YJ150U	M 15 OHM, J,1/4W	5	
R6031,32	ERJ6ENF8202	M 82KOHM, 1/10W	2	
	_	M 56KOHM, 1/10W	1	
R6033	ERJ6ENF5602	<u> </u>		
R6034	ERJ6ENF2702	M 27KOHM, 1/10W	1	
R6041-46	ERJ14YJ100	M 10 OHM, J,1/4W	6	
R6053-56	ERJ14YJ100	M 10 OHM, J,1/4W	4	
R6061,62	ERJ6GEYJ224	M 220KOHM,J,1/10W M 100 OHM,J,0.25W	1	

Ref. No.	Part No.	Part Name & Description	Pcs	Remarks
R6104	D0GD101JA036	M 100 OHM,J,0.25W	1	
R6106	D0GD101JA036	M 100 OHM,J,0.25W	1	
R6108	D0GD101JA036	M 100 OHM,J,0.25W	1	
R6109	D0GD100JA036	M 10 OHM,J,0.25W	1	
R6110	ERJ6GEYJ103	M 10KOHM,J,1/10W	1	
R6111,12	D0GD470JA036	M 47 OHM,J,0.25W	2	
R6113	ERJ14YJ224	M 220KOHM, J,1/4W	1	
R6114	D0GD470JA036	M 47 OHM,J,0.25W	1	
R6116	ERJ6GEYJ103	M 10KOHM,J,1/10W	1	
R6131,32	ERJ6GEYJ101	M 100 OHM,J,1/10W	2	
R6133,34	ERJ6GEYJ151	M 150 OHM,J,1/10W	2	
R6135,36	D0GD100JA036	M 10 OHM,J,0.25W	2	
R6141,42	ERJ6GEYJ103	M 10KOHM,J,1/10W	2	
R6146,47	ERJ6GEYJ103	M 10KOHM,J,1/10W	2	
R6151,52	ERJ6GEYJ101	M 100 OHM,J,1/10W	2	
R6153,54	ERJ6GEYJ151	M 150 OHM,J,1/10W	2	
R6155,56	ERJ6GEY0R00	M 0 OHM, 1/10W	2	
R6157-60	D0GF1R0JA047	M 1.0 OHM,J, 0.33W	4	
R6171	D0GD100JA036	M 10 OHM,J,0.25W	1	
R6172,73	ERJ6GEYJ103	M 10KOHM,J,1/10W	2	
R6181	D0GD100JA036	M 10 OHM,J,0.25W	1	
R6182,83	ERJ6GEYJ103	M 10KOHM,J,1/10W	2	
R6191-94	ERJ6GEYJ101	M 100 OHM,J,1/10W	4	
R6195	D0GD104JA036	M 100KOHM,J,0.25W	1	
R6196	ERJ6GEYJ104	M 100KOHM,J,1/10W	1	
R6213	ERJ6GEYJ101	M 100 OHM,J,1/10W	1	
R6214	D0GD151JA036	M 150 OHM,J,0.25W	1	
R6220	ERDS2TC0	C 0 OHM, 1/4W	1	
R6222	ERG1FJS103D	M 10KOHM, J, 1W	1	
R6223	ERG2FJS123D	M 12KOHM, J, 2W	1	
R6225	D0GD203JA036	M 20KOHM,J,0.25W	1	
R6226,27	ERJ6GEYJ163	M 16KOHM,J,1/10W	2	
R6228	ERJ6GEYJ562	M 5.6KOHM,J,1/10W	1	
R6229	ERJ6GEYJ163	M 16KOHM,J,1/10W	1	
R6230	ERDS2TC0	C 0 OHM, 1/4W	1	
R6231	ERJ6GEY0R00	M 0 OHM, 1/10W	1	
R6232	ERJ6ENF1201	M 1.2KOHM, 1/10W	1	
R6241	EXB38V470J	RESISTOR ARRAY	1	
R6242	EXB38V472J	RESISTOR ARRAY	1	
R6243	EXB38V470J	RESISTOR ARRAY	1	
R6244	EXB38V472J	RESISTOR ARRAY	1	
R6251	D0GD103JA036	M 10KOHM,J,0.25W	1	
R6252,53	ERJ6ENF3902	M 39KOHM, 1/10W	2	
R6254	ERJ6ENF6801	M 6.8KOHM, 1/10W	1	
R6255	ERJ6ENF1201	M 1.2KOHM, 1/10W	1	
R6256	ERJ6ENF1501	M 1.5KOHM, 1/10W	1	
R6257	ERJ6GEYJ103	M 10KOHM, J,1/10W	1	
		M 2.2KOHM,J,1/10W	1	
R6258	ERJ6GEYJ222		1	
R6261	ERJ6GEYJ104	M 100KOHM, J,1/10W		
R6401-06	ERJ14YJ150U	M 15 OHM, J,1/4W	6	
R6421-26	ERJ14YJ150U	M 15 OHM, J,1/4W	6	
R6441-46	ERJ14YJ100	M 10 OHM, J,1/4W	6	
R6453-56	ERJ14YJ100 ERJ6ENF2702	M 10 OHM, J,1/4W M 27KOHM, 1/10W	1	

Ref. No.	Part No.	Part Name & Description	Pcs	Remarks
R6466	ERJ6ENF5602	M 56KOHM, 1/10W	1	
R6467,68	ERJ6ENF8202	M 82KOHM, 1/10W	2	
R6471	ERJ6GEYJ392	M 3.9KOHM,J,1/10W	1	
R6472	ERJ6GEYJ222	M 2.2KOHM,J,1/10W	1	
R6473	ERJ6GEYJ561	M 560 OHM,J,1/10W	1	
R6474	ERJ6GEYJ102	M 1KOHM,J,1/10W	1	
R6475,76	ERJ6GEYJ472	M 4.7KOHM,J,1/10W	2	
R6477	ERJ6GEYJ102	M 1KOHM,J,1/10W	1	
R6478	ERJ6GEYJ472	M 4.7KOHM,J,1/10W	1	
R6479	ERJ6GEYJ104	M 100KOHM,J,1/10W	1	
R6501,02	ERJ6GEYJ101	M 100 OHM,J,1/10W	2	
R6503	D0GD100JA036	M 10 OHM,J,0.25W	1	
R6504,05	ERJ6GEYJ151	M 150 OHM,J,1/10W	2	
R6506	D0GD100JA036	M 10 OHM,J,0.25W	1	
R6507-09	D0GF1R0JA047	M 1.0 OHM,J, 0.33W	3	
R6511,12	ERJ6GEYJ103	M 10KOHM,J,1/10W	2	
R6516,17	ERJ6GEYJ103	M 10KOHM,J,1/10W	2	
R6521,22	ERJ6GEYJ101	M 100 OHM,J,1/10W	2	
R6523,24	ERJ6GEYJ151	M 150 OHM,J,1/10W	2	
R6525,26	ERJ6GEY0R00	M 0 OHM, 1/10W	2	
R6531	D0GD100JA036	M 10 OHM,J,0.25W	1	
R6532,33	ERJ6GEYJ103	M 10KOHM,J,1/10W	2	
R6551	D0GD100JA036	M 10 OHM,J,0.25W	1	
R6552,53	ERJ6GEYJ103	M 10KOHM,J,1/10W	2	
R6561-64	EXB38V470J	RESISTOR ARRAY	4	
R6565-68	EXB38V472J	RESISTOR ARRAY	4	
R6581	D0GD103JA036	M 10KOHM,J,0.25W	1	
R6582,83	ERJ6ENF3902	M 39KOHM, 1/10W	2	
R6584	ERJ6ENF8201	M 8.2KOHM, 1/10W	1	
R6585	ERJ6ENF1201	M 1.2KOHM, 1/10W	1	
R6586	ERJ6ENF1801	M 1.8KOHM, 1/10W	1	
R6587	ERJ6GEYJ222	M 2.2KOHM,J,1/10W	1	
R6588	ERJ6GEYJ103	M 10KOHM,J,1/10W	1	
R6590	ERJ6GEYJ221	M 220 OHM,J,1/10W	1	
R6591	EXB38V472J	RESISTOR ARRAY	1	
R6592		M 4.7KOHM.J.1/10W	1	
	ERJ6GEYJ472	,,,,,,		
R6603	ERJ6GEYJ101	M 100 OHM,J,1/10W	1	
R6604	D0GD151JA036	M 150 OHM,J,0.25W	1	
R6605	ERJ6GEYJ104	M 100KOHM,J,1/10W	1	
R6606	ERJ6GEY0R00	M 0 OHM, 1/10W	1	
R6607	ERJ6ENF5361	M5.36KOHM, 1/10W	1	
R6608,09	D0GF102JA047	M 1.0 KOHM,J,0.33W	2	
R6610	ERJ6GEYJ104	M 100KOHM,J,1/10W	1	
R6611	ERJ6GEYJ105	M 1MOHM,J,1/10W	1	
R6612	ERJ6GEYJ470	M 47 OHM,J,1/10W	1	
R6613	ERJ6GEYJ105	M 1MOHM,J,1/10W	1	
R6614,15	D0GF243JA047	M 24 KOHM,J,0.33W	2	
R6616	ERJ6ENF1502	M 15KOHM, 1/10W	1	
R6617	ERJ6GEYJ105	M 1MOHM,J,1/10W	1	
R6618	ERJ6ENF1202	M 12KOHM, 1/10W	1	
R6619	ERJ6ENF1501	M 1.5KOHM, 1/10W	1	
R6620	D0D28R2JA021	M 8.2 OHM,J,5W	1	
R6621,22	ERJ6GEYJ221	M 220 OHM,J,1/10W	2	
R6641-45	ERJ6GEYJ100	M 10 OHM,J,1/10W	5	

Ref. No.	Part No.	Part Name & Description	Pcs	Remarks
R6647,48	ERJ6GEYJ100	M 10 OHM,J,1/10W	2	
R6658	D0D1101JA009	M 100 OHM,J,1W	1	
R6659,60	ERJ6GEYJ224	M 220KOHM,J,1/10W	2	
R6661	ERJ6GEYJ104	M 100KOHM,J,1/10W	1	
R6662	ERJ6ENF3001	M 3KOHM, 1/10W	1	
R6663	ERJ6GEYJ103	M 10KOHM,J,1/10W	1	
R6664	D0GF222JA047	M 2.2 KOHM,J,0.33W	1	
R6665	ERJ14YJ470	M 47 OHM,J, 1/2W	1	
R6666	ERJ6GEYJ104	M 100KOHM,J,1/10W	1	
R6667,68	ERJ6GEYJ472	M 4.7KOHM,J,1/10W	2	
R6671	ERJ6GEYJ470	M 47 OHM,J,1/10W	1	
R6672	ERJ6GEYJ103	M 10KOHM,J,1/10W	1	
R6673-75	D0GD5R6JA059	M 5.6 OHM,J,0.25W	3	
R6682	ERJ6GEYJ101	M 100 OHM,J,1/10W	1	
R6683	D0GD151JA036	M 150 OHM,J,0.25W	1	
R6684	ERJ6GEYJ100	M 10 OHM,J,1/10W	1	
R6685	ERJ6GEYJ471	M 470 OHM,J,1/10W	1	
R6686	ERJ6GEYJ103	M 10KOHM,J,1/10W	1	
R6687	ERJ6GEYJ222	M 2.2KOHM,J,1/10W	1	
R6688	ERJ6GEYJ472	M 4.7KOHM,J,1/10W	1	
R6689	ERJ6GEYJ100	M 10 OHM,J,1/10W	1	
R6690	ERJ6GEYJ151	M 150 OHM,J,1/10W	1	
R6691	ERJ6GEYJ103	M 10KOHM,J,1/10W	1	
R6696,97	D0D32R2JA020	M 2.2 OHM,J,5W	2	
R6700-08	ERJ6GEYJ471	M 470 OHM,J,1/10W	9	
R6710-18	ERJ6GEYJ222	M 2.2KOHM,J,1/10W	9	
R6721,22	EXB38V220J	RESISTOR ARRAY	2	
R6723	ERJ6GEYJ222	M 2.2KOHM,J,1/10W	1	
R6724	ERJ6GEYJ101	M 100 OHM,J,1/10W	1	
R6742	ERJ6GEYJ103	M 10KOHM,J,1/10W	1	
R6743	ERJ6GEYJ102	M 1KOHM,J,1/10W	1	
R6744	ERJ6GEYJ103	M 10KOHM,J,1/10W	1	
R6745	ERJ6GEYJ472	M 4.7KOHM,J,1/10W	1	
R6746,47	D0GD103JA036	M 10KOHM,J,0.25W	2	
R6755	ERJ6GEYJ101	M 100 OHM,J,1/10W	1	
R6756-58	D0GD101JA059	M 100 OHM,J,0.25W	3	
R6759	ERJ6GEYJ472	M 4.7KOHM,J,1/10W	1	
R6760	ERJ6GEYJ122	M 1.2KOHM,J,1/10W	1	
R6761	ERJ6GEYJ100	M 10 OHM,J,1/10W	1	
R6762	ERJ6GEYJ103	M 10KOHM,J,1/10W	1	
R6775,76	ERJ6GEYJ101	M 100 OHM,J,1/10W	2	
R6777	D0GD151JA036	M 150 OHM,J,0.25W	1	
R6781	ERJ6GEYJ470	M 47 OHM,J,1/10W	1	
R6782	ERJ6GEYJ103	M 10KOHM,J,1/10W	1	
R6791	ERJ6GEYJ102	M 1KOHM,J,1/10W	1	
R6792	ERJ6GEYJ103	M 10KOHM,J,1/10W	1	
R6793	ERJ6GEYJ101	M 100 OHM,J,1/10W	1	
R6801	ERX3FJS8R2D	M 8.2 OHM, J, 3W	1	
			1	
R6802	ERG2FJS683D	M 68KOHM, J, 2W		
R6803	ERG2FJS563D	M 56KOHM, J, 2W	1	
R6806,07	ERX12SJ1R2	M 1.2 OHM, J,1/2W	2	
R6808	D0GD272JA059	M 2.7KOHM,J,0.25W	1	
R6809	ERJ6GEYJ103 ERJ6GEYJ433	M 10KOHM,J,1/10W M 43KOHM,J,1/10W	2	

Ref. No.	Part No.	Part Name & Description	Pcs	Remarks
R6812	ERJ6ENF2403	M 240KOHM, 1/10W	1	
R6813	ERJ6ENF9101	M 9.1KOHM, 1/10W	1	
R6814	ERJ6ENF5601	M 5.6KOHM, 1/10W	1	
R6816	ERJ6ENF3902	M 39KOHM, 1/10W	1	
R6817	ERJ6ENF1302	M 13KOHM, 1/10W	1	
R6819	ERJ6GEYJ681	M 680 OHM,J,1/10W	1	
R6820	ERJ6GEY0R00	M 0 OHM, 1/10W	1	
R6821	ERG2FJS221D	M 220 OHM, J, 2W	1	
R6822	ERJ12YJ104U	M 100KOHM, 1/2W	1	
R6823	ERG1FJS104D	M 100KOHM, J, 1W	1	
R6824	ERJ6GEYJ562	M 5.6KOHM,J,1/10W	1	
R6825,26	ERJ6ENF2703	M 270KOHM, 1/10W	2	
R6827	ERJ6ENF2702	M 27KOHM, 1/10W	1	
R6828	ERJ6ENF5101	M 5.1KOHM, 1/10W	1	
R6829,30	ERJ6GEYJ224	M 220KOHM,J,1/10W	2	
R6831	ERJ6GEYJ153	M 15KOHM,J,1/10W	1	
R6832	ERDS1FJ4R7	C 4.7 OHM, J,1/2W	1	
R6833-36	ERJ6ENF5602	M 56KOHM, 1/10W	4	
R6837	ERJ6ENF5102	M 51KOHM, 1/10W	1	
R6839	ERJ6GEYJ472	M 4.7KOHM,J,1/10W	1	
R6841	ERJ12YJ153U	M 15KOHM, 1/2W	1	
R6842	ERJ14YJ433U	M 43KOHM, 1/2W	1	
R6843	ERJ6GEYJ623	M 62KOHM,J,1/10W	1	
R6844	D0D2101JA021	M 100 OHM,J,2W	1	
R6845	ERJ6GEYJ623	M 62KOHM,J,1/10W	1	
R6846,47	ERJ6GEYJ563	M 56KOHM,J,1/10W	2	
R6848	ERJ6GEYJ103	M 10KOHM,J,1/10W	1	
R6849,50	ERJ6ENF6802	M 68KOHM, 1/10W	2	
R6851	ERJ6ENF1201	M 1.2KOHM, 1/10W	1	
R6852	ERJ6ENF2491	M2.49KOHM, 1/10W	1	
R6853	ERJ6GEYJ101	M 100 OHM,J,1/10W	1	
R6858	D0GD102JA059	M 1.0KOHM,J,0.25W	1	
R6860	D0D28R2JA021	M 8.2 OHM,J,5W	1	
R6861	ERJ6ENF3902	M 39KOHM, 1/10W	1	
R6862,63	ERJ6ENF4702	M 47KOHM, 1/10W	2	
R6864	ERJ6ENF9101	M 9.1KOHM, 1/10W	1	
R6865,66	ERJ6ENF2201	M 2.2KOHM, 1/10W	2	
R6867	ERJ6GEYJ392	M 3.9KOHM,J,1/10W	1	
		M 22KOHM,J,1/10W		
R6868	ERJ6GEYJ223	· · ·	1	
R6869	ERJ6GEYJ472	M 4.7KOHM,J,1/10W	1	
R6871-73	ERJ6ENF3902	M 39KOHM, 1/10W	3	
R6874	ERJ6ENF8201	M 8.2KOHM, 1/10W	1	
R6875	ERJ6ENF3301	M 3.3KOHM, 1/10W	1	
R6876	ERJ6ENF1201	M 1.2KOHM, 1/10W	1	
R6877	ERJ6GEYJ392	M 3.9KOHM,J,1/10W	1	
R6878	ERJ6GEYJ223	M 22KOHM, J,1/10W	1	
R6879	ERJ6GEYJ472	M 4.7KOHM,J,1/10W	1	
R6886-88	ERJ6GEYJ224	M 220KOHM,J,1/10W	3	
R6891	ERJ6GEYJ332	M 3.3KOHM,J,1/10W	1	
R6901	ERJ6GEYJ101	M 100 OHM,J,1/10W	1	
R6902-04	ERJ3GEYJ220	M 22 OHM,J,1/16W	3	
R6905	ERJ6GEYJ221	M 220 OHM,J,1/10W	1	
R6909	ERJ6GEYJ221	M 220 OHM,J,1/10W	1	
R6913	ERJ6GEYJ221	M 220 OHM,J,1/10W	1	

Ref. No.	Part No.	Part Name & Description	Pcs	Remarks
R6917	ERJ6GEYJ221	M 220 OHM,J,1/10W	1	
R6924	ERJ6GEYJ221	M 220 OHM,J,1/10W	1	
R6931-34	ERJ6GEYJ103	M 10KOHM,J,1/10W	4	
R6935,36	ERJ8GEYJ224	M 220KOHM, J,1/8W	2	
R6951	ERJ6GEYJ221	M 220 OHM,J,1/10W	1	
R6955	ERJ6GEYJ221	M 220 OHM,J,1/10W	1	
R6959	ERJ6GEYJ221	M 220 OHM,J,1/10W	1	
R6963	ERJ6GEYJ221	M 220 OHM,J,1/10W	1	
R6967	ERJ6GEYJ221	M 220 OHM,J,1/10W	1	
R6971	ERJ6GEYJ101	M 100 OHM,J,1/10W	1	
R6972-74	ERJ3GEYJ220	M 22 OHM,J,1/16W	3	
R6981-84	ERJ6GEYJ103	M 10KOHM,J,1/10W	4	
R6985,86	ERJ8GEYJ224	M 220KOHM, J,1/8W	2	
R7103-06	ERJ12YJ6R8U	M 6.8 OHM, J,1/2W	4	
R7108	ERJ3GEY0R00	M 0 OHM, 1/16W	1	
R7110	ERJ3GEY0R00	M 0 OHM, 1/16W	1	
R7113-16	ERJ12YJ6R8U	M 6.8 OHM, J,1/2W	4	
R7118	ERJ3GEY0R00	M 0 OHM, 1/16W	1	
R7120	ERJ3GEY0R00	M 0 OHM, 1/16W	1	
R7123-26	ERJ12YJ6R8U	M 6.8 OHM, J,1/2W	4	
R7128	ERJ3GEY0R00	M 0 OHM, 1/16W	1	
R7130	ERJ3GEY0R00	M 0 OHM, 1/16W	1	
R7131	ERJ6GEYJ102	M 1KOHM,J,1/10W	1	
R7132	ERJ6GEY0R00	M 0 OHM, 1/10W	1	
R7133	ERJ6GEYJ223	M 22KOHM,J,1/10W	1	
R7134	ERJ6GEYJ104	M 100KOHM,J,1/10W	1	
R7135	EXB38V471J	RESISTOR ARRAY	1	
R7136-39	ERJ3GEYJ220	M 22 OHM,J,1/16W	4	
R7140-42	ERJ3GEYJ470	M 47 OHM,J,1/16W	3	
R7201	ERJ3GEYJ103	M 10KOHM,J,1/16W	1	
R7203-05	ERJ12YJ6R8U	M 6.8 OHM, J,1/2W	3	
R7207	ERJ3GEYJ470	M 47 OHM, J, 1/16W	1	
R7209,10	ERJ3GEYJ470	M 47 OHM,J,1/16W	2	
R7211-13	EXB38V471J	RESISTOR ARRAY	3	
R7215,16	EXB38V470J	RESISTOR ARRAY	2	
R7221-25	ERJ12YJ6R8U	M 6.8 OHM, J,1/2W	5	
R7228,29	ERJ3GEYJ470	M 47 OHM,J,1/16W	2	
R7234,35	ERJ12YJ6R8U	M 6.8 OHM, J,1/2W	2	
R7238,39	ERJ12YJ6R8U	M 6.8 OHM, J,1/2W	2	
R7240	ERJ3GEY0R00	M 0 OHM, 1/16W	1	
R7241-44	EXB38V471J	RESISTOR ARRAY	4	
R7245	ERJ3GEY0R00	M 0 OHM, 1/16W	1	
R7246-49	EXB38V471J	RESISTOR ARRAY	4	
R7250-53	ERJ12YJ6R8U	M 6.8 OHM, J,1/2W	4	
R7254	ERJ3GEY0R00	M 0 OHM, 1/16W	1	
R7256	ERJ3GEY0R00	M 0 OHM, 1/16W	1	
R7257-60		M 22 OHM, J,1/16W	4	
	ERJ3GEYJ220	<u> </u>		
R7261-63	ERJ3GEYJ470	M 47 OHM,J,1/16W	3	
R7264-71	EXB38V470J	RESISTOR ARRAY	8	
R7274-79	EXB38V471J	RESISTOR ARRAY	6	
R7280-85	EXB38V470J	RESISTOR ARRAY	6	
R7301-08	EXB38V470J	RESISTOR ARRAY	8	
R7309	EXB38V471J	RESISTOR ARRAY	1	

Ref. No.	Part No.	Part Name & Description	Pcs	Remarks
R7330,31	ERJ3GEYJ470	M 47 OHM,J,1/16W	2	
R7332	ERJ3GEY0R00	M 0 OHM, 1/16W	1	
R7333,34	ERJ3GEYJ470	M 47 OHM,J,1/16W	2	
R7335,36	ERJ3GEY0R00	M 0 OHM, 1/16W	2	
R7337-44	ERJ12YJ6R8U	M 6.8 OHM, J,1/2W	8	
R7345-48	ERJ3GEY0R00	M 0 OHM, 1/16W	4	
R7349-56	ERJ12YJ6R8U	M 6.8 OHM, J,1/2W	8	
R7357,58	ERJ3GEY0R00	M 0 OHM, 1/16W	2	
R7359	ERJ6GEYJ102	M 1KOHM,J,1/10W	1	
R7360	ERJ6GEYJ104	M 100KOHM,J,1/10W	1	
R7361	ERJ6GEYJ223	M 22KOHM,J,1/10W	1	
R7362-69	EXB38V471J	RESISTOR ARRAY	8	
R7403-06	ERJ12YJ6R8U	M 6.8 OHM, J,1/2W	4	
R7408	ERJ3GEY0R00	M 0 OHM, 1/16W	1	
R7410	ERJ3GEY0R00	M 0 OHM, 1/16W	1	
R7413-16	ERJ12YJ6R8U	M 6.8 OHM, J,1/2W	4	
R7418	ERJ3GEY0R00	M 0 OHM, 1/16W	1	
R7420	ERJ3GEY0R00	M 0 OHM, 1/16W	1	
R7423-26	ERJ12YJ6R8U	M 6.8 OHM, J,1/2W	4	
R7428	ERJ3GEY0R00	M 0 OHM, 1/16W	1	
R7430	ERJ3GEY0R00	M 0 OHM, 1/16W	1	
R7433-36	ERJ12YJ6R8U	M 6.8 OHM, J,1/2W	4	
R7438	ERJ3GEY0R00	M 0 OHM, 1/16W	1	
R7440	ERJ3GEY0R00	M 0 OHM, 1/16W	1	
R7441-44	ERJ3GEYJ220	M 22 OHM,J,1/16W	4	
R7445	ERJ6GEY0R00	M 0 OHM, 1/10W	1	
R7446-49	ERJ3GEYJ470	M 47 OHM,J,1/16W	4	
R7450-57	EXB38V470J	RESISTOR ARRAY	8	
R7459	ERJ6GEYJ102	M 1KOHM,J,1/10W	1	
R7460	ERJ6GEYJ223	M 22KOHM,J,1/10W	1	
R7461	ERJ6GEYJ104	M 100KOHM,J,1/10W	1	
R7462-70	EXB38V681J	RESISTOR ARRAY	9	
R7501,02	EXB38V681J	RESISTOR ARRAY	2	
R7503	ERJ3GEYJ470	M 47 OHM,J,1/16W	1	
	EXB38V470J	RESISTOR ARRAY	2	
R7504,05 R7510-13		M 6.8 OHM. J.1/2W	4	
	ERJ12YJ6R8U	, , , , ,		
R7514	ERJ3GEYJ470	M 47 OHM,J,1/16W	1	
R7515	EXB38V681J	RESISTOR ARRAY	1	
R7516-19	ERJ12YJ6R8U	M 6.8 OHM, J,1/2W	4	
R7520	ERJ3GEY0R00	M 0 OHM, 1/16W	1	
R7521-24	ERJ12YJ6R8U	M 6.8 OHM, J,1/2W	4	
R7525	ERJ3GEY0R00	M 0 OHM, 1/16W	1	
R7526-33	EXB38V681J	RESISTOR ARRAY	8	
R7535	ERJ3GEYJ103	M 10KOHM,J,1/16W	1	
R7536	ERJ3GEYJ220	M 22 OHM,J,1/16W	1	
R7537	ERJ3GEYJ470	M 47 OHM,J,1/16W	1	
R7538	ERJ3GEY0R00	M 0 OHM, 1/16W	1	
R7541-43	ERJ3GEYJ220	M 22 OHM,J,1/16W	3	
R7544-46	ERJ3GEYJ470	M 47 OHM,J,1/16W	3	
R7547-54	EXB38V470J	RESISTOR ARRAY	8	
R7555	ERJ3GEYJ470	M 47 OHM,J,1/16W	1	
R7556-59	ERJ12YJ6R8U	M 6.8 OHM, J,1/2W	4	
R7560	ERJ3GEYJ470	M 47 OHM,J,1/16W	1	
R7575	ERJ3GEYJ103	M 10KOHM,J,1/16W	1	

Ref. No.	Part No.	Part Name & Description	Pcs	Remarks
R7577	ERJ3GEY0R00	M 0 OHM, 1/16W	1	
R7580-85	EXB38V681J	RESISTOR ARRAY	6	
R7586-91	EXB38V470J	RESISTOR ARRAY	6	
R7603-06	ERJ12YJ6R8U	M 6.8 OHM, J,1/2W	4	
R7608	ERJ3GEY0R00	M 0 OHM, 1/16W	1	
R7610	ERJ3GEY0R00	M 0 OHM, 1/16W	1	
R7613-16	ERJ12YJ6R8U	M 6.8 OHM, J,1/2W	4	
R7618	ERJ3GEY0R00	M 0 OHM, 1/16W	1	
R7620	ERJ3GEY0R00	M 0 OHM, 1/16W	1	
R7623-26	ERJ12YJ6R8U	M 6.8 OHM, J,1/2W	4	
R7628	ERJ3GEY0R00	M 0 OHM, 1/16W	1	
R7630	ERJ3GEY0R00	M 0 OHM, 1/16W	1	
R7631	ERJ3GEYJ102	M 1KOHM,J,1/16W	1	
R7632	ERJ6GEYJ104	M 100KOHM,J,1/10W	1	
R7633	ERJ6GEYJ223	M 22KOHM,J,1/10W	1	
R7634	ERJ6GEY0R00	M 0 OHM, 1/10W	1	
R7635-38	ERJ3GEYJ220	M 22 OHM,J,1/16W	4	
R7639-41	ERJ3GEYJ470	M 47 OHM,J,1/16W	3	
R7642	EXB38V681J	RESISTOR ARRAY	1	
R7701	ERJ3GEYJ470	M 47 OHM,J,1/16W	1	
R7702	ERJ3GEY0R00	M 0 OHM, 1/16W	1	
R7703-05	ERJ3GEYJ470	M 47 OHM,J,1/16W	3	
R7706	ERJ6GEY0R00	M 0 OHM, 1/10W	1	
R7707	ERJ3GEYJ562	M 5.6KOHM,J,1/16W	1	
R7708	ERJ3GEY0R00	M 0 OHM, 1/16W	1	
R7709	ERJ3GEYJ470	M 47 OHM,J,1/16W	1	
R7710	ERJ3GEYJ101	M 100 OHM,J,1/16W	1	
R7713	ERJ3GEYJ220	M 22 OHM,J,1/16W	1	
R7714	ERJ3GEYJ473	M 47KOHM,J,1/16W	1	
R7716	ERJ3GEY0R00	M 0 OHM, 1/16W	1	
R7721-29	ERJ3GEY0R00	M 0 OHM, 1/16W	9	
R7751-55	ERJ3GEYJ103	M 10KOHM,J,1/16W	5	
R7757	ERJ3GEY0R00	M 0 OHM, 1/16W	1	
R7759	ERJ6GEY0R00	M 0 OHM, 1/10W	1	
R7760-62	ERJ3GEYJ103	M 10KOHM,J,1/16W	3	
R7764-71	ERJ3GEY0R00	M 0 OHM, 1/16W	8	
R7773-76	ERJ3GEYJ470	M 47 OHM,J,1/16W	4	
R7777	ERJ3GEYJ473	M 47KOHM,J,1/16W	1	
R7779	ERJ6GEYJ101	M 100 OHM,J,1/10W	1	
		M 22KOHM,J,1/16W	1	
R7780	ERJ3GEYJ223	M 5.6KOHM,J,1/16W	1	
R7781	ERJ3GEYJ562	* * * * * * * * * * * * * * * * * * * *		
R7783	ERJ3GEYJ103	M 10KOHM, J,1/16W	1	TH FORVEOUR
R8001	ERJ2GEJ103	M 10KOHM, J,0.063W	1	TH-50PX600B
R8002	ERJ2GEJ272	M 2.7KOHM, J,0.063W	1	TH-50PX600B
R8003,04	ERJ2GEJ181	M 180 OHM, J,0.063W	2	TH-50PX600B
R8006	ERJ8GEY0R00	M 0 OHM, 1/8W	1	TH-50PX600B
R8008	ERJ2GEJ102	M 1KOHM, J.0.063W	1	TH-50PX600B
R8010-12	ERJ2GEJ103	M 10KOHM, J,0.063W	3	TH-50PX600B
R8014,15	ERJ2GEJ103	M 10KOHM, J,0.063W	2	TH-50PX600B
R8017,18	ERJ3GEY0R00	M 0 OHM, 1/16W	2	TH-50PX600B
R8020-22	ERJ2GEJ103	M 10KOHM, J,0.063W	3	TH-50PX600B
R8027	D1HG5608A002	NETWORK RESISTER	1	TH-50PX600B
R8028-30	ERJ2GEJ560	M 56 OHM, J,0.063W	3	TH-50PX600B
R8033	ERJ2GEJ472	M 4.7KOHM, J,0.063W	1	TH-50PX600B

Ref. No.	Part No.	Part Name & Description	Pcs	Remarks
R8034,35	ERJ3GEY0R00	M 0 OHM, 1/16W	2	TH-50PX600B
R8036	ERJ3GEYJ163	M 16KOHM,J,1/16W	1	TH-50PX600B
R8038	ERJ2GEJ560	M 56 OHM, J,0.063W	1	TH-50PX600B
R8039,40	ERJ2GEJ472	M 4.7KOHM, J,0.063W	2	TH-50PX600B
R8041	ERJ2GEJ154	M 150KOHM, J,0.063W	1	TH-50PX600B
R8046	ERJ2GEJ330	M 33 OHM, J,0.063W	1	TH-50PX600B
R8047-50	ERJ2GEJ101	M 100 OHM, J,0.063W	4	TH-50PX600B
R8051	EXB38V330J	RESISTOR ARRAY	1	TH-50PX600B
R8052-55	ERJ2GEJ103	M 10KOHM, J,0.063W	4	TH-50PX600B
R8056	ERJ2GEJ330	M 33 OHM, J,0.063W	1	TH-50PX600B
R8057	ERJ2GEJ680	M 68 OHM, J,0.063W	1	TH-50PX600B
R8058	EXB38V330J	RESISTOR ARRAY	1	TH-50PX600B
R8059	ERJ2GEJ103	M 10KOHM, J,0.063W	1	TH-50PX600B
R8073	ERJ2GEJ105	M 1MOHM, J,0.063W	1	TH-50PX600B
R8074,75	ERJ2GEJ181	M 180 OHM, J,0.063W	2	TH-50PX600B
R8076	ERJ2GEJ103	M 10KOHM, J,0.063W	1	TH-50PX600B
R8078	ERJ2GEJ562	M 5.6KOHM,J,0.063W	1	TH-50PX600B
R8079	ERJ2GEJ473	M 47KOHM,J,0.063W	1	TH-50PX600B
R8084,85	D1HG1218A002	NETWORK RESISTER	2	TH-50PX600B
R8086-88	ERJ2GEJ560	M 56 OHM, J,0.063W	3	TH-50PX600B
R8101	ERJ3GEYF181	M 180 OHM,J,1/16W	1	TH-50PX600B PAVCCZ
R8104	ERJ2GEJ560	M 56 OHM, J,0.063W	1	TH-50PX600B
R8106,07	ERJ2GEJ103	M 10KOHM, J,0.063W	2	TH-50PX600B
R8108	ERJ3EKF1002	M 10KOHM, 1/16W	1	TH-50PX600B
R8109	ERJ3EKF2202	M 22KOHM, 1/16W	1	TH-50PX600B
R8110	ERJ3EKF1501	M 1.5KOHM, 1/16W	1	TH-50PX600B
R8111	ERJ2GE0R00	M 0.0 OHM, J,0.063W	1	TH-50PX600B
R8112,13	ERJ3GEY0R00	M 0 OHM, 1/16W	2	TH-50PX600B
R8115	ERJ3GEYF272	M 2.7KOHM, 1/16W	1	TH-50PX600B
R8117	ERJ6GEYJ471	M 470 OHM,J,1/10W	1	TH-50PX600B
R8123	ERJ3GEY0R00	M 0 OHM, 1/16W	1	TH-50PX600B
R8124	ERJ2GEJ471	M 470 OHM, J,0.063W	1	TH-50PX600B
R8127	ERJ2GE0R00	M 0.0 OHM, J,0.063W	1	TH-50PX600B
R8132,33	ERJ2GEJ560	M 56 OHM, J,0.063W	2	TH-50PX600B
R8136	ERJ2GEJ103	M 10KOHM, J,0.063W	1	TH-50PX600B
R8137	ERJ2GEJ121	M 120 OHM, J,0.063W	1	TH-50PX600B
R8140,41	ERJ3EKF1001	M 1KOHM, 1/16W	2	TH-50PX600B
R8144,45	D1HG5608A002	NETWORK RESISTER	2	TH-50PX600B
· · · · · · · · · · · · · · · · · · ·				
R8148,49	D1HG3908A002	NETWORK RESISTER	2	TH-50PX600B
R8150-59	ERJ2GEJ390	M 39 OHM, J,0.063W	10	TH-50PX600B
R8161,62	ERJ2GEJ390	M 39 OHM, J,0.063W	2	TH-50PX600B
R8163	ERJ2GEJ560	M 56 OHM, J.0.063W	1	TH-50PX600B
R8165	ERJ2GEJ560	M 56 OHM, J,0.063W	1 5	TH-50PX600B
R8167-71	ERJ2GEJ103	M 10KOHM, J,0.063W	5	TH-50PX600B
R8172	ERJ2GEJ473	M 47KOHM,J,0.063W	1	TH-50PX600B
R8173	EXB38V560J	RESISTOR ARRAY	1	TH-50PX600B
R8175,76	ERJ2GEJ103	M 10KOHM, J,0.063W	2	TH-50PX600B
R8183	ERJ2GE0R00	M 0.0 OHM, J,0.063W	1	TH-50PX600B
R8184	ERJ2GEJ223	M 22KOHM, J,0.063W	1	TH-50PX600B
R8187	ERJ2GEJ103	M 10KOHM, J,0.063W	1	TH-50PX600B
R8188	ERJ3GEY0R00	M 0 OHM, 1/16W	1	TH-50PX600B
R8193	ERJ2GEJ103	M 10KOHM, J,0.063W	1	TH-50PX600B
R8195,96	ERJ2GEJ103	M 10KOHM, J,0.063W	2	TH-50PX600B
R8201-04	ERJ2GEJ103	M 10KOHM, J,0.063W	4	TH-50PX600B

Ref. No.	Part No.	Part Name & Description	Pcs	Remarks
R8215	ERJ2GEJ103	M 10KOHM, J,0.063W	1	TH-50PX600B
R8216,17	ERJ2GEJ560	M 56 OHM, J,0.063W	2	TH-50PX600B
R8218,19	D1HG33080001	NETWORK RESISTER	2	TH-50PX600B
R8220-22	D1HG5608A002	NETWORK RESISTER	3	TH-50PX600B
R8223	ERJ2GEJ560	M 56 OHM, J,0.063W	1	TH-50PX600B
R8224,25	ERJ2GEJ103	M 10KOHM, J,0.063W	2	TH-50PX600B
R8226	ERJ2GEJ330	M 33 OHM, J,0.063W	1	TH-50PX600B
R8232-43	ERJ2GEJ330	M 33 OHM, J,0.063W	12	TH-50PX600B
R8244	ERJ2GEJ103	M 10KOHM, J,0.063W	1	TH-50PX600B
R8245,46	ERJ2GEJ330	M 33 OHM, J,0.063W	2	TH-50PX600B
R8250	ERJ2GEJ103	M 10KOHM, J,0.063W	1	TH-50PX600B
R8252-54	ERJ2GEJ330	M 33 OHM, J,0.063W	3	TH-50PX600B
R8255	ERJ2GEJ103	M 10KOHM, J,0.063W	1	TH-50PX600B
R8256	ERJ2GEJ472	M 4.7KOHM, J,0.063W	1	TH-50PX600B
R8257	ERJ2GEJ103	M 10KOHM, J,0.063W	1	TH-50PX600B
R8259	ERJ2GEJ103	M 10KOHM, J,0.063W	1	TH-50PX600B
R8260-63	ERJ2GEJ560	M 56 OHM, J,0.063W	4	TH-50PX600B
R8264-68	ERJ2GEJ103	M 10KOHM, J,0.063W	5	TH-50PX600B
R8269	ERJ2GEJ560	M 56 OHM, J,0.063W	1	TH-50PX600B
R8271	ERJ2GEJ560	M 56 OHM, J,0.063W	1	TH-50PX600B
R8272	EXB38V560J	RESISTOR ARRAY	1	TH-50PX600B
R8273	ERJ2GEJ560	M 56 OHM, J,0.063W	1	TH-50PX600B
R8275	ERJ2GEJ560	M 56 OHM, J,0.063W	1	TH-50PX600B
R8277	ERJ2GEJ560	M 56 OHM, J,0.063W	1	TH-50PX600B
R8279	ERJ2GE0R00	M 0.0 OHM, J,0.063W	1	TH-50PX600B
R8282	ERJ2GEJ560	M 56 OHM, J,0.063W	1	TH-50PX600B
R8284	ERJ2GEJ560	M 56 OHM, J,0.063W	1	TH-50PX600B
R8286,87	ERJ2GEJ560	M 56 OHM, J,0.063W	2	TH-50PX600B
R8290	EXB38V560J	RESISTOR ARRAY	1	TH-50PX600B
R8291,92	ERJ2GEJ560	M 56 OHM, J,0.063W	2	TH-50PX600B
R8310-15	ERJ3EKF75R0	M 0.75HM, 1/16W	6	TH-50PX600B
R8319	ERJ3EKF2702V	M27.0KOHM, 1/16W	1	TH-50PX600B
R8320	ERJ3EKF1002	M 10KOHM, 1/16W	1	TH-50PX600B
R8321	ERJ3EKF8201	M 8.2KOHM, 1/16W	1	TH-50PX600B
R8349	ERJ2GEJ104	M 100KOHM, J,0.063W	1	TH-50PX600B
R8350	ERJ3EKF8201	M 8.2KOHM, 1/16W	1	TH-50PX600B
R8351	ERJ3EKF1002	M 10KOHM, 1/16W	1	TH-50PX600B
R8352	ERJ3EKF2702V	M27.0KOHM, 1/16W	1	TH-50PX600B
R8353	ERJ2GEJ332	M 3.3KOHM, J,0.063W	1	TH-50PX600B
R8354	ERJ2GEJ272	M 2.7KOHM, J,0.063W	1	
R8355,56			_	TH-50PX600B TH-50PX600B
	EXB2HV104JV	RESISTOR ARRAY	2	TH-50PX600B
R8357,58	ERJ2GEJ473	M 47KOHM, J,0.063W	2	
R8366	ERJ2GEJ103	M 10KOHM, J,0.063W	1	TH-50PX600B
R8367,68	ERJ2GEJ560	M 56 OHM, J.0.063W	2	TH-50PX600B
R8372-76	ERJ2GEJ560	M 56 OHM, J,0.063W	5	TH-50PX600B
R8401	ERJ8GEY0R00	M 0 OHM, 1/8W	1	TH-50PX600B
R8402	ERJ6GEY0R00	M 0 OHM, 1/10W	1	TH-50PX600B
R8403	ERJ2GE0R00	M 0.0 OHM, J,0.063W	1	TH-50PX600B
R8404,05	ERJ2GEJ103	M 10KOHM, J,0.063W	2	TH-50PX600B
R8406	ERJ8RSJR10	M 1 OHM, 1/8W	1	TH-50PX600B
R8407	ERJ2GEJ333	M 33KOHM, J,0.063W	1	TH-50PX600B
R8414	ERJ2GE0R00	M 0.0 OHM, J,0.063W	1	TH-50PX600B
R8415,16	ERJ2GEJ223	M 22KOHM, J,0.063W	2	TH-50PX600B
R8417,18	EXB38V473J	RESISTOR ARRAY	2	TH-50PX600B

Ref. No.	Part No.	Part Name & Description	Pcs	Remarks
R8419,20	EXB38V101J	RESISTOR ARRAY	2	TH-50PX600B
R8421	ERJ2GEJ223	M 22KOHM, J,0.063W	1	TH-50PX600B
R8422	ERJ2GEJ104	M 100KOHM, J,0.063W	1	TH-50PX600B
R8423	ERJ2GEJ821	M 820 OHM, J,0.063W	1	TH-50PX600B
R8425,26	EXB38V101J	RESISTOR ARRAY	2	TH-50PX600B
R8427-31	ERJ2GEJ560	M 56 OHM, J,0.063W	5	TH-50PX600B
R8433,34	EXB38V560J	RESISTOR ARRAY	2	TH-50PX600B
R8443	EXB38V560J	RESISTOR ARRAY	1	TH-50PX600B
R8444	ERJ2GEJ101	M 100 OHM, J,0.063W	1	TH-50PX600B
R8445,46	ERJ2GEJ151	M 150 OHM, J,0.063W	2	TH-50PX600B
R8447	ERJ2GEJ223	M 22KOHM, J,0.063W	1	TH-50PX600B
R8448	ERJ2GEJ473	M 47KOHM,J,0.063W	1	TH-50PX600B
R8449,50	ERJ2GEJ103	M 10KOHM, J,0.063W	2	TH-50PX600B
R8451	EXB38V104J	RESISTOR ARRAY	1	TH-50PX600B
R8452	ERJ2GEJ104	M 100KOHM, J,0.063W	1	TH-50PX600B
R8453	EXB38V104J	RESISTOR ARRAY	1	TH-50PX600B
R8454	ERJ2GEJ104	M 100KOHM, J,0.063W	1	TH-50PX600B
R8456-59	EXB38V560J	RESISTOR ARRAY	4	TH-50PX600B
R8460	ERJ2GEJ104	M 100KOHM, J,0.063W	1	TH-50PX600B
R8461	ERJ2GEJ560	M 56 OHM, J,0.063W	1	TH-50PX600B
R8462,63	ERJ2GE0R00	M 0.0 OHM, J,0.063W	2	TH-50PX600B
R8464	ERJ2GEJ560	M 56 OHM, J,0.063W	1	TH-50PX600B
R8465	ERJ2GEJ103	M 10KOHM, J,0.063W	1	TH-50PX600B
R8466	EXB38V560J	RESISTOR ARRAY	1	TH-50PX600B
R8467,68	ERJ2GEJ560	M 56 OHM, J,0.063W	2	TH-50PX600B
R8469	EXB38V151J	RESISTOR ARRAY	1	TH-50PX600B
R8474	ERJ2GE0R00	M 0.0 OHM, J,0.063W	1	TH-50PX600B
R8475,76	ERJ2GEJ103	M 10KOHM, J,0.063W	2	TH-50PX600B
R8477,78	ERJ2GEJ560	M 56 OHM, J,0.063W	2	TH-50PX600B
R8479	ERJ2GEJ203	M 20KOHM,J,0.063W	1	TH-50PX600B
R8480-82	ERJ2GEJ560	M 56 OHM, J,0.063W	3	TH-50PX600B
R8483	ERJ2GEJ203	M 20KOHM,J,0.063W	1	TH-50PX600B
R8484	ERJ2GEJ223	M 22KOHM, J,0.063W	1	TH-50PX600B
R8485	ERJ2GEJ333	M 33KOHM, J,0.063W	1	TH-50PX600B
R8486	ERJ2GEJ223	M 22KOHM, J,0.063W	1	TH-50PX600B
R8487	ERJ2GEJ560	M 56 OHM, J,0.063W	1	TH-50PX600B
R8488	ERJ2GE0R00	M 0.0 OHM, J,0.063W	1	TH-50PX600B
R8489	ERJ2GEJ102	M 1KOHM, J,0.063W	1	TH-50PX600B
R8491	ERJ3EKF9102	M91.0KOHM, 1/16W	1	TH-50PX600B
		•		
R8492	ERJ3EKF1802	M 18KOHM, 1/16W M91.0KOHM, 1/16W	1 1	TH-50PX600B
R8493	ERJ3EKF9102	M 9.1KOHM, 1/16W	1	TH-50PX600B
R8494	ERJ3EKF9101	<u>'</u>		TH-50PX600B
R8495	EXB38V151J	RESISTOR ARRAY	1	TH-50PX600B
R8496	EXB38V560J	RESISTOR ARRAY	1	TH-50PX600B
R8497	ERJ3EKF3300	M 330 OHM, 1/16W	1	TH-50PX600B
R8498	ERJ3EKF2200	M 220 OHM, 1/16W	1	TH-50PX600B
R8499	ERJ3EKF2432	M24.3KOHM, 1/16W	1	TH-50PX600B
R8500	ERJ3EKF1052	M10.5KOHM, 1/16W	1	TH-50PX600B
R8501	ERJ3EKF5601	M 5.6KOHM, 1/16W	1	TH-50PX600B
R8502	ERJ3EKF2402	M 24KOHM, 1/16W	1	TH-50PX600B
R8503,04	ERJ2GEJ103	M 10KOHM, J,0.063W	2	TH-50PX600B
R8505	ERJ2GEJ101	M 100 OHM, J,0.063W	1	TH-50PX600B
R8538,39	ERJ2GEJ101	M 100 OHM, J,0.063W	2	TH-50PX600B
R8546	ERJ2GEJ333	M 33KOHM, J,0.063W	1	TH-50PX600B

Ref. No.	Part No.	Part Name & Description	Pcs	Remarks
R8547	ERJ2GEJ102	M 1KOHM, J,0.063W	1	TH-50PX600B
R8601	ERJ3GEY0R00	M 0 OHM, 1/16W	1	TH-50PX600B
R8602-04	ERJ2GEJ101	M 100 OHM, J,0.063W	3	TH-50PX600B
R8605,06	ERJ2GEJ104	M 100KOHM, J,0.063W	2	TH-50PX600B
R8608	ERJ2GEJ105	M 1MOHM, J,0.063W	1	TH-50PX600B
R8610	ERJ2GEJ332	M 3.3KOHM, J,0.063W	1	TH-50PX600B
R8611	ERJ6GEY0R00	M 0 OHM, 1/10W	1	TH-50PX600B
R8614	ERJ2GEJ221	M 220 OHM, J,0.063W	1	TH-50PX600B
R8615	ERJ2GE0R00	M 0.0 OHM, J,0.063W	1	TH-50PX600B
R8701-08	ERJ2GEJ560	M 56 OHM, J,0.063W	8	TH-50PX600B
R8729-36	ERJ2GEJ103	M 10KOHM, J,0.063W	8	TH-50PX600B
R8827,28	ERJ2GEJ392	M 3.9KOHM, J,0.063W	2	TH-50PX600B
R8831,32	ERJ2GE0R00	M 0.0 OHM, J,0.063W	2	TH-50PX600B
R8862-64	ERJ2GE0R00	M 0.0 OHM, J,0.063W	3	TH-50PX600B
R8899,00	ERJ2GE0R00	M 0.0 OHM, J,0.063W	2	TH-50PX600B
R8912	ERJ2GE0R00	M 0.0 OHM, J,0.063W	1	TH-50PX600B
R8927	ERJ2GE0R00	M 0.0 OHM, J,0.063W	1	TH-50PX600B
R8930	ERJ2GE0R00	M 0.0 OHM, J,0.063W	1	TH-50PX600B
R8931,32	ERJ2GEJ392	M 3.9KOHM, J,0.063W	2	TH-50PX600B
R8933,34	ERJ2GE0R00	M 0.0 OHM, J,0.063W	2	TH-50PX600B
R8936	ERJ2GEJ103	M 10KOHM, J,0.063W	1	TH-50PX600B
R8954	ERJ2GEJ103	M 10KOHM, J,0.063W	1	TH-50PX600B
R8960	ERJ2GE0R00	M 0.0 OHM, J,0.063W	1	TH-50PX600B
R8962-64	ERJ2GEJ101	M 100 OHM, J,0.063W	3	TH-50PX600B
R8967,68	EXB2HV473JV	RESISTOR ARRAY	2	TH-50PX600B PAVCCZ
R8969-71	ERJ2GEJ473	M 47KOHM,J,0.063W	3	TH-50PX600B
R9060-67	ERJ3GEYJ101	M 100 OHM,J,1/16W	8	
R9070	ERJ3GEYJ470	M 47 OHM,J,1/16W	1	
R9074	ERJ3GEYJ101	M 100 OHM,J,1/16W	1	
R9076	ERJ3GEYJ101	M 100 OHM,J,1/16W	1	
R9095	ERJ3GEYJ103	M 10KOHM,J,1/16W	1	
R9097	ERJ3GEYJ103	M 10KOHM,J,1/16W	1	
R9099	ERJ3GEYJ101	M 100 OHM,J,1/16W	1	
R9100,01	ERJ3GEYJ103	M 10KOHM,J,1/16W	2	
R9102	ERJ3GEYJ101	M 100 OHM,J,1/16W	1	
R9106	ERJ3GEYJ103	M 10KOHM,J,1/16W	1	
R9107	ERJ3GEYJ332	M 3.3KOHM,J,1/16W	1	
R9108,09	ERJ3GEYJ103	M 10KOHM,J,1/16W	2	
R9110	ERJ3GEYJ101	M 100 OHM,J,1/16W	1	
	ERJ3GEYJ223	M 22KOHM,J,1/16W	1	
R9111	+	M 10 OHM,J,1/16W	1	
R9113	ERJ3GEYJ100	M 100 OHM,J,1/16W	1	
R9120	ERJ3GEYJ101	• • • • • • • • • • • • • • • • • • • •	1	
R9121	ERJ3GEYJ104	M 100KOHM, J,1/16W		
R9127	ERJ3GEYJ103	M 10KOHM, J,1/16W	1	
R9129	ERJ3GEYJ683	M 68KOHM,J,1/16W	1	
R9134	ERJ3GEYJ333	M 33KOHM,J,1/16W	1	
R9140	ERJ6GEY0R00	M 0 OHM, 1/10W	1	
R9141-45	ERJ3GEYJ101	M 100 OHM,J,1/16W	5	
R9148	ERJ3GEYJ103	M 10KOHM, J,1/16W	1	
R9149	ERJ3GEYJ472	M 4.7KOHM,J,1/16W	1	
R9150,51	ERJ3GEYJ220	M 22 OHM,J,1/16W	2	
R9152,53	ERJ3GEYJ472	M 4.7KOHM,J,1/16W	2	
R9154,55	ERJ3GEYJ562	M 5.6KOHM,J,1/16W	2	

Ref. No.	Part No.	Part Name & Description	Pcs	Remarks
R9160,61	ERJ3GEY0R00	M 0 OHM, 1/16W	2	
R9164-66	ERJ3GEYJ103	M 10KOHM,J,1/16W	3	
R9167,68	ERJ3GEYJ101	M 100 OHM,J,1/16W	2	
R9169	ERJ3GEYJ103	M 10KOHM,J,1/16W	1	
R9170-72	ERJ3GEYJ393	M 39KOHM,J,1/16W	3	
R9173-75	ERJ3GEYJ103	M 10KOHM,J,1/16W	3	
R9177	ERJ3GEYJ223	M 22KOHM,J,1/16W	1	
R9178	ERJ3GEYJ103	M 10KOHM,J,1/16W	1	
R9179	ERJ3GEYJ102	M 1KOHM,J,1/16W	1	
R9180	ERJ3GEYJ103	M 10KOHM,J,1/16W	1	
R9181-84	ERJ3GEYJ102	M 1KOHM,J,1/16W	4	
R9185,86	ERJ3GEYJ220	M 22 OHM,J,1/16W	2	
R9187,88	ERJ3GEYJ562	M 5.6KOHM,J,1/16W	2	
R9189,90	ERJ3GEYJ103	M 10KOHM,J,1/16W	2	
R9192	ERJ3GEY0R00	M 0 OHM, 1/16W	1	
R9193	ERJ3GEYJ103	M 10KOHM,J,1/16W	1	
R9194	ERJ3GEY0R00	M 0 OHM, 1/16W	1	
R9196	ERJ3GEYJ103	M 10KOHM,J,1/16W	1	
R9198	ERJ3GEYJ472	M 4.7KOHM,J,1/16W	1	
R9199	ERJ3GEYJ272	M 2.7KOHM,J,1/16W	1	
R9201,02	ERJ3GEYJ472	M 4.7KOHM,J,1/16W	2	
R9203	ERJ3GEYJ102	M 1KOHM,J,1/16W	1	
R9204,05	ERJ3GEYJ472	M 4.7KOHM,J,1/16W	2	
R9206,07	ERJ3GEYJ102	M 1KOHM,J,1/16W	2	
R9209	ERJ3GEYJ100	M 10 OHM,J,1/16W	1	
R9210	ERJ3GEYJ272	M 2.7KOHM,J,1/16W	1	
R9215	ERJ3GEYJ123	M 12KOHM,J,1/16W	1	
R9217-22	ERJ3GEYJ103	M 10KOHM,J,1/16W	6	
R9236	ERJ3GEY0R00	M 0 OHM, 1/16W	1	
R9237	ERJ3GEYJ103	M 10KOHM,J,1/16W	1	
R9244,45	ERJ3GEYJ101	M 100 OHM,J,1/16W	2	
R9247,48	ERJ3GEYJ472	M 4.7KOHM,J,1/16W	2	
R9300,01	ERJ3GEYJ820	M 82 OHM,J,1/16W	2	
R9302,03	D1HG8208A002	NETWORK RESISTER	2	
R9304,05	ERJ3GEYJ220	M 22 OHM,J,1/16W	2	
R9306,07	EXB38V820J	RESISTOR ARRAY	2	
R9308	D1HG8208A002	NETWORK RESISTER	1	
R9309,10	ERJ3GEYJ220	M 22 OHM,J,1/16W	2	
		M 82 OHM,J,1/16W		
R9311,12	ERJ3GEYJ820	NETWORK RESISTER	2	
R9313,14	D1HG8208A002		2	
R9315,16	ERJ3GEYJ220	M 22 OHM,J,1/16W	2	
R9318	ERJ3GEYJ472	M 4.7KOHM, J, 1/16W	1	
R9319	ERJ3GEYJ104	M 100KOHM, J,1/16W	1	
R9320	ERJ3GEYJ103	M 10KOHM,J,1/16W	1	
R9367	ERJ3GEYJ181	M 180 OHM,J,1/16W	1	
R9371	EXB2HV470JV	RESISTOR ARRAY	1	
R9372	ERJ3GEYJ470	M 47 OHM, J, 1/16W	1	
R9373	ERJ3GEYJ330	M 33 OHM,J,1/16W	1	
R9374	EXB38V470J	RESISTOR ARRAY	1	
R9375	ERJ3GEYJ151	M 150 OHM,J,1/16W	1	
R9389-91	ERJ3GEYJ103	M 10KOHM,J,1/16W	3	
R9393-95	D1HG8208A002	NETWORK RESISTER	3	
R9396,97	ERJ3GEYJ220	M 22 OHM,J,1/16W	2	
R9398	EXB38V820J	RESISTOR ARRAY	1	

Ref. No.	Part No.	Part Name & Description	Pcs	Remarks
R9404	EXB2HV470JV	RESISTOR ARRAY	1	
R9412-21	EXB38V470J	RESISTOR ARRAY	10	
R9428	EXB38V103J	RESISTOR ARRAY	1	
R9430	ERJ3GEYJ103	M 10KOHM,J,1/16W	1	
R9433	ERJ3GEYJ103	M 10KOHM,J,1/16W	1	
R9437,38	ERJ3GEYJ103	M 10KOHM,J,1/16W	2	
R9440	EXB2HV470JV	RESISTOR ARRAY	1	
R9441	ERJ3GEYJ472	M 4.7KOHM,J,1/16W	1	
R9442	ERJ3GEYJ103	M 10KOHM,J,1/16W	1	
R9443	ERJ3GEYJ104	M 100KOHM,J,1/16W	1	
R9444	D1HG8208A002	NETWORK RESISTER	1	
R9445	ERJ3GEYJ220	M 22 OHM,J,1/16W	1	
R9446	EXB38V820J	RESISTOR ARRAY	1	
R9448	ERJ3GEYJ220	M 22 OHM,J,1/16W	1	
R9449,50	D1HG8208A002	NETWORK RESISTER	2	
R9451,52	ERJ3GEYJ220	M 22 OHM,J,1/16W	2	
R9453-57	D1HG8208A002	NETWORK RESISTER	5	
R9458,59	ERJ3GEYJ820	M 82 OHM,J,1/16W	2	
R9460,61	ERJ3GEYJ220	M 22 OHM,J,1/16W	2	
R9462,63	EXB38V820J	RESISTOR ARRAY	2	
R9464,65	ERJ3GEYJ220	M 22 OHM,J,1/16W	2	
R9466,67	ERJ3GEYJ820	M 82 OHM,J,1/16W	2	
R9468	ERJ3GEYJ101	M 100 OHM,J,1/16W	1	
R9469	ERJ3GEYJ104	M 100KOHM,J,1/16W	1	
R9470	ERJ3GEYJ472	M 4.7KOHM,J,1/16W	1	
R9471	ERJ3GEYJ103	M 10KOHM,J,1/16W	1	
R9472	ERJ3GEYJ104	M 100KOHM,J,1/16W	1	
R9475	ERJ3GEYJ103	M 10KOHM,J,1/16W	1	
R9480	ERJ3GEY0R00	M 0 OHM, 1/16W	1	
R9482-85	ERJ3EKF1001	M 1KOHM, 1/16W	4	
R9486	ERJ3GEYJ330	M 33 OHM,J,1/16W	1	
R9487	ERJ3GEYJ151	M 150 OHM,J,1/16W	1	
R9488	ERJ3GEYJ330	M 33 OHM,J,1/16W	1	
R9489-95	ERJ3GEYJ470	M 47 OHM,J,1/16W	7	
R9496	ERJ3GEYJ103	M 10KOHM,J,1/16W	1	
R9497	ERJ3GEYJ472	M 4.7KOHM,J,1/16W	1	
R9498	ERJ3GEYJ104	M 100KOHM,J,1/16W	1	
R9506	ERJ3GEYJ220	M 22 OHM,J,1/16W	1	
R9507	ERJ3GEYJ560	M 56 OHM,J,1/16W	1	
R9512	ERJ3GEY0R00	M 0 OHM, 1/16W	1	
R9514	ERJ3GEY0R00	M 0 OHM, 1/16W	1	
R9515	ERJ3GEYJ470	M 47 OHM,J,1/16W	1	
R9523	ERJ3GEYJ103	M 10KOHM,J,1/16W	1	
R9525	ERJ3GEYJ103	M 10KOHM,J,1/16W	1	
R9526	ERJ3GEY0R00	M 0 OHM, 1/16W	1	
R9527,28	EXB2HV272JV	RESISTOR ARRAY	2	
R9527,28 R9529,30	ERJ3GEYJ103	M 10KOHM,J,1/16W	2	
R9531-33	ERJ3GEYJ470	M 47 OHM,J,1/16W	3	
		RESISTOR ARRAY	1	
R9534	EXB38V470J			
R9535,36	ERJ3GEYJ470	M 47 OHM, J, 1/16W	2	
R9537	ERJ3GEYJ103	M 10KOHM, J,1/16W	1	
R9539	ERJ3GEY0R00	M 0 OHM, 1/16W	1	
R9542 R9543,44	ERJ3GEYJ680 ERJ3GEYJ103	M 68 OHM,J,1/16W M 10KOHM,J,1/16W	2	

Ref. No.	Part No.	Part Name & Description	Pcs	Remarks
R9545	ERJ3GEYJ304V	M 300KOHM,J,1/16W	1	
R9546	ERJ3GEYJ103	M 10KOHM,J,1/16W	1	
R9548-50	ERJ3GEYJ103	M 10KOHM,J,1/16W	3	
R9552-54	ERJ3GEYJ470	M 47 OHM,J,1/16W	3	
R9556	ERJ3GEYJ103	M 10KOHM,J,1/16W	1	
R9560	ERJ3GEYJ103	M 10KOHM,J,1/16W	1	
R9574	ERJ3GEY0R00	M 0 OHM, 1/16W	1	
R9578	ERJ3GEY0R00	M 0 OHM, 1/16W	1	
R9580-83	ERJ3EKF1001	M 1KOHM, 1/16W	4	
R9584	ERJ3GEYJ330	M 33 OHM,J,1/16W	1	
R9585,86	ERJ3GEYJ470	M 47 OHM,J,1/16W	2	
R9587-95	EXB38V470J	RESISTOR ARRAY	9	
R9596-99	ERJ3GEYJ470	M 47 OHM,J,1/16W	4	
R9602	ERJ3GEY0R00	M 0 OHM, 1/16W	1	
R9616	ERJ3GEY0R00	M 0 OHM, 1/16W	1	
R9619,20	ERJ3GEYJ472	M 4.7KOHM,J,1/16W	2	
R9622	ERJ3GEY0R00	M 0 OHM, 1/16W	1	
R9624,25	ERJ3GEYJ103	M 10KOHM,J,1/16W	2	
R9628	ERJ3GEYJ103	M 10KOHM,J,1/16W	1	
R9630	ERJ3GEYJ103	M 10KOHM,J,1/16W	1	
R9631	EXB2HV272JV	RESISTOR ARRAY	1	
R9632-34	ERJ3GEYJ470	M 47 OHM,J,1/16W	3	
R9637	ERJ3GEYJ470	M 47 OHM,J,1/16W	1	
R9639	ERJ3GEYJ470	M 47 OHM,J,1/16W	1	
R9641	ERJ3GEYJ470	M 47 OHM,J,1/16W	1	
R9643	ERJ3GEY0R00	M 0 OHM, 1/16W	1	
R9645	ERJ3GEY0R00	M 0 OHM, 1/16W	1	
R9800	ERJ3EKF1302	M 23KOHM, 1/16W	1	
R9801	ERJ3EKF2402	M 24KOHM, 1/16W	1	
R9802	ERJ3EKF6202	M 62KOHM, 1/16W	1	
R9803	ERJ3GEY0R00	M 0 OHM, 1/16W	1	
R9804	ERJ3EKF2402	M 24KOHM, 1/16W	1	
R9805	ERJ3EKF3002	M 30KOHM, 1/16W	1	
R9806	ERJ3EKF3902	M 39KOHM, 1/16W	1	
R9807	ERJ3GEY0R00	M 0 OHM, 1/16W	1	
R9808	ERJ3GEYJ104	M 100KOHM,J,1/16W	1	
R9810		M 3KOHM, 1/16W	1	
	ERJ3EKF3001	M 2.4KOHM, 1/16W	1	
R9813	ERJ3EKF2401	·		
R9814	ERJ3EKF6802	M 68KOHM, 1/16W	1	
R9815	ERJ3EKF2202	M 22KOHM, 1/16W	1	
R9816	ERJ3EKF8202	M 82KOHM, 1/16W	1	
R9821	ERJ3GEYJ103	M 10KOHM,J,1/16W	1	
R9823-28	ERJ3GEYJ101	M 100 OHM,J,1/16W	6	
R9830,31	ERJ3GEYJ103	M 10KOHM,J,1/16W	2	
R9838,39	ERJ3GEYJ101	M 100 OHM,J,1/16W	2	
R9840	ERJ3GEYJ220	M 22 OHM,J,1/16W	1	
R9841	ERJ3GEY0R00	M 0 OHM, 1/16W	1	
R9842-44	ERJ3GEYJ101	M 100 OHM,J,1/16W	3	
R9845	ERJ3GEYJ562	M 5.6KOHM,J,1/16W	1	
R9846,47	EXB2HV272JV	RESISTOR ARRAY	2	
R9848,49	EXB2HV470JV	RESISTOR ARRAY	2	
R9850	ERJ3GEYJ473	M 47KOHM,J,1/16W	1	
R9854	ERJ3GEYJ101	M 100 OHM,J,1/16W	1	
R9859	EXB38V101J	RESISTOR ARRAY	1	

Ref. No.	Part No.	Part Name & Description	Pcs	Remarks
R9868	ERJ3GEYJ104	M 100KOHM,J,1/16W	1	
R9869-71	ERJ3GEYJ103	M 10KOHM,J,1/16W	3	
R9872	ERJ3GEY0R00	M 0 OHM, 1/16W	1	
R9875-77	ERJ3GEYJ103	M 10KOHM,J,1/16W	3	
R9878	ERJ3EKF3902	M 39KOHM, 1/16W	1	
R9879	ERJ3EKF2002	M 20KOHM, 1/16W	1	
R9880	ERJ3EKF3602	M 36KOHM, 1/16W	1	
R9883 R9884	ERJ3GEY0R00 ERJ3GEYJ104	M 0 OHM, 1/16W M 100KOHM,J,1/16W	1	
R9891	ERJ3EKF4702	M 47KOHM, 1/16W	1	
R9892	ERJ3EKF1502	M 15KOHM, 1/16W	1	
R9893	ERJ3EKF3602	M 36KOHM, 1/16W	1	
R9896	ERJ3GEY0R00	M 0 OHM, 1/16W	1	
R9897	ERJ3GEYJ104	M 100KOHM,J,1/16W	1	
		,,,,,,,,,,,,,,,,,,,,,,,,,,,,,,,,,,,,,,,		
RM2501	PNA4701M05TV	REMOTE RECEIVER	1	
RTL	TNPA3740AC	CIRCUIT BOARD XV	1	A.
RTL	TNPA3756CA	CIRCUIT BOARD DG	1	TH-50PX600B PAVCCZ
RTL	TNPA3756CG	CIRCUIT BOARD DG	1	TH-50PV600E PAVCCZ
RTL	TNPA3759	CIRCUIT BOARD H	1	TH-50PX600B PAVCCZ
RTL			1	PAVCCZ A
	TNPA3766	CIRCUIT BOARD HC		PAVCCZ A
RTL	TNPA3767	CIRCUIT BOARD TA	1	TH-50PV600E PAVCCZ
RTL	TNPA3767AB	CIRCUIT BOARD TA	1	TH-50PX600B PAVCCZ
RTL	TXNPA1BETB	CIRCUIT BOARD PA	1	PAVCCZ A
RTL	ETXMM610MEF	CIRCUIT BOARD P	1	
RTL	TXNC11BETB	CIRCUIT BOARD C1	1	PAVCCZ A
RTL	TXNC21BETB	CIRCUIT BOARD C2	1	PAVCCZ A
RTL	TXNC31BETB	CIRCUIT BOARD C3	1	PAVCCZ A
RTL	TXNC41BETB	CIRCUIT BOARD C4	1	PAVCCZ
RTL	TXNC51BETB	CIRCUIT BOARD C5	1	PAVCCZ A
RTL	TXNC61BETB	CIRCUIT BOARD C6	1	PAVCCZ A
RTL	TZTNP01BETB	CIRCUIT BOARD D	1	A
RTL	TXNSC1BETB	CIRCUIT BOARD SC	1	PAVCCZ A
RTL	TXNSD1BETB	CIRCUIT BOARD SD	1	PAVCCZ A
RTL	TXNSS21BETB	CIRCUIT BOARD SS2	1	PAVCCZ A
RTL	TXNSS1BETB	CIRCUIT BOARD SS	1	PAVCCZ A
RTL	TXNSS31BETB	CIRCUIT BOARD SS3	1	PAVCCZ A
RTL	TXNSU1BETB	CIRCUIT BOARD SU	1	PAVCCZ A
RTL	TXN/G1BJTB	CIRCUIT BOARD G	1	PAVCCZ A
RTL	TXNGK1BJTB	CIRCUIT BOARD GK	1	PAVCCZ A
RTL	TXN/K1BJTB	CIRCUIT BOARD K	1	TH-50PX600B PAVCCZ
RTL	TXN/K1BJTE	CIRCUIT BOARD K	1	TH-50PV600E PAVCCZ
	1	1		551 7500L 1 AVCGZ -
RTL	TXNGS1BETB	CIRCUIT BOARD GS	1	PAVCCZ A

Ref. No.	Part No.	Part Name & Description	Pcs	Remarks
RTL	TXN/S1BJTB	CIRCUIT BOARD S	1	PAVCCZ A
 S1	K1KA03BA0061	3P CONNECTOR	1	
<u> </u>		<u> </u>	-	
SC2	K1KA02A00626	2P CONNECTOR	1	
SC20	K1KA20AA0008	20P CONNECTOR	1	
SC23	K1KA03AA0193	3P CONNECTOR	1	
SC30	K1KA08AA0192	8P CONNECTOR	1	
SC41,42	K1ML80B00001	80P CONNECTOR	2	
SC45,46	K1KA09A00239	9P CONNECTOR	2	
SCMM2,M3	TMME260	CLAMPER	2	
SD1-D4	K1MN96B00006	96P CONNECTOR	4	
SD46	K1KB09A00045	9P CONNECTOR	1	
	W4W400485555	an activitation		
SS11	K1KA02A00626	2P CONNECTOR	1	
SS12	K1KA10AA0194	10P CONNECTOR	1	
SS20,21	K1KA07A00170	7P CONNECTOR	2	
SS22,23	K1KB07AA0087	7P CONNECTOR	2	
SS33	K1KA04AA0193	4P CONNECTOR	1	
SS34	K1KA03AA0193	3P CONNECTOR	1	
SS43	K1KA12AA0194	12P CONNECTOR	1	
SS44	K1KA04AA0193	4P CONNECTOR	1	
SS51-56	K1MN13B00020	13P CONNECTOR	6	
SU1-U4	K1MN96B00006	96P CONNECTOR	4	
SU45	K1KB09A00045	9P CONNECTOR	1	
SW2500	K0F162B00002	SWITCH	1	
SW3753-57	EVQ11G05R	SWITCH	5	
3443733-37	EVQTIGUSK	SWITCH	- 3	
T6602	ETS25AZ149AD	TRANS	1	
TA5	K1KB15B00013	15P CONNECTOR	1	
TA6	K1KB09B00019	9P CONNECTOR	1	
TU001	ENG37A12GF	TUNER	1	TH-50PV600E
TU001	ENGF7301GF	TUNER	1	TH-50PX600B PAVCCZ
TU8001	ENV57M01D8F	TUNER	1	TH-50PX600B PAVCCZ
VR6000	EVMEASA00B14	CONTROL 10KOHMB 0.3W	1	
VR6600	EVMEASA00B14 EVMEASA00B13	CONTROL 10KOHMB 0.3W	1	
VR6602	EVMEASA00B13	CONTROL 5KOHMB 0.3W	1	
X1100	H0J100500030	CRYSTAL	1	
X1101	H0J327200114	CRYSTAL	1	
X2101	H0J184500027	CRYSTAL	1	
X4004	H0J270500087	CRYSTAL	1	
X4006	H0J202500016	CRYSTAL	1	
X8003	H0J241500003	CRYSTAL	1	TH-50PX600B PAVCCZ
X8006	H0J270500090	CRYSTAL	1	TH-50PX600B PAVCCZ

	1			
Ref. No.	Part No.	Part Name & Description	Pcs	Remarks
X9500	H0J200500038	CRYSTAL	1	
XV01	K1KAB0A00011	CONNECTOR	1	TH-50PX600B
ZA2101-08	TESA169	SHIELD CLIP	8	
ZA2300,01	K4CZ01000027	COMPATIBLE WITH JALCO K9	2	
ZA3401-05	K4CZ01000027	COMPATIBLE WITH JALCO K9	5	
ZA3701	K4CD01000013	TERMINAL	1	
ZA4001,02	K4CD08000002	TERMINAL	2	
ZA6001-03	K4CD01000011	TERMINAL	3	
ZA6401-03	K4CD01000011	TERMINAL	3	
ZA7101-05	K4CD01000013	TERMINAL	5	
ZA7201-05	K4CD01000013	TERMINAL	5	
ZA7301-05	K4CD01000013	TERMINAL	5	
ZA7401-05	K4CD01000013	TERMINAL	5	
ZA7501-05	K4CD01000013	TERMINAL	5	
ZA7601-05	K4CD01000013	TERMINAL	5	
ZA9001	K4CD01000011	TERMINAL	1	
			-	
A101,02	RA362MSV7	ARRESTOR	2	<u>A</u>
				177
C101	ECQU2A105ML	P 1UF, 250V	1	Δ
C102	ECQU2A224ML	P 0.22UF, 250V	1	Δ
C103,04	ECKENA221KBR	C 221P 250V	2	⚠
C106,07	MMXC2W105K	C 1P 450V	2	
C108	ECJ2XB1H223K	C 0.022UF, K, 50V	1	
C109	ECJ2FB1H104K	C 0.1UF, K, 50V	1	
C110	ECJ2XC1H471J	C 470PF, J, 50V	1	
C111	ECJ2XB1H102K	C 1000PF, K, 50V	1	
C112	KZE1E470	C 470U 25V	1	
C113	ECJ2XC1H471J	C 470PF, J, 50V	1	
C114	ECJ2XC1H101J	C 100PF, J, 50V	1	
C115	ECQE6472B45	C 4700U 630V	1	
C116,17	KMQ2W221L	C 220U 450V	2	
C118			1	
C119	ECJ2FB1H104K ECKDNA331KB7	C 0.1UF, K, 50V C 330PF, Z,	1	A
C120	ECJ2FB1H104K	C 0.1UF, K, 50V	1	
C121	ECJ2XB1H223K	C 0.022UF, K, 50V	1	
C122,23	ECJ2FB1H104K	C 0.1UF, K, 50V	2	
C127	KMQ2W221L	C 220U 450V	1	
C128	TBB106K1A	C 10U 10V	1	
C129	ECJ2FB1H104K	C 0.1UF, K, 50V	1	
C201,02	KZE1E470	C 470U 25V	2	
C203,04	RR3DD101K7	C 100P 2KV	2	
C206	ECWH8473HV	P 0.047PF, J, 8KV	1	
C251	KMQ220901Z	C 900U 220V	1	
C253,54	KMQ220901Z	C 900U 220V	2	
C256,57	ECQE2473SKF	C 0.047U 250V	2	
C301	KZE1E470	C 470U 25V	1	
C302,03	RR3DD101K7	C 100P 2KV	2	
C305	ECWH8183HV	C 0.018UF 800V	1	
C306	KZE1E470	C 470U 25V	1	

Ref. No.	Part No.	Part Name & Description	Pcs	Remarks
C351-53	KZE1E182S	C 1800UF 25V	3	
C354,55	ECQV1H474JL	P 0.47UF, J, 50V	2	
C356	KZE1E821L	C 8200UF 25V	1	
C357	TEB104K5	C 0.1UF 50V	1	
C358	KZE1E331S	C 330UF 25V	1	
C359	TEB104K5	C 0.1UF 50V	1	
C360	KZE1E101	C 100UF 25V	1	
C361	TEB104K5	C 0.1UF 50V	1	
C363	KZE1E821L	C 8200UF 25V	1	
C364	TEB104K5	C 0.1UF 50V	1	
C365	KZE2A270	C 27UF 100V	1	
C401	KZE2A270	C 27UF 100V	1	
C402	KZE2A471S	C 470UF 100V	1	
C404,05	KZE2A471S	C 470UF 100V	2	
C501	ECQU2A473ML	P 0.047UF, M,250V	1	Δ
C502,03	ECJ2FB1H104K	C 0.1UF, K, 50V	2	
C504	KZE1E101	C 100UF 25V	1	
C505	KZE1E470	C 470U 25V	1	
C506	KXG2W330	C 330UF 450V	1	
C508	ECJ2FB1H104K	C 0.1UF, K, 50V	1	
C509	ECJ2XB1H103K	C 0.01UF, K, 50V	1	
C510	KZE1H101	C 100UF 50V	1	
C514	KZE1E101	C 100UF 25V	1	
C515	ECJ2FB1H104K	C 0.1UF, K, 50V	1	
C551	ECKENA221KBR	C 220P 250V	1	Δ
C552	KZE1E331S	C 330UF 25V	1	
C555	TBB474K2	C 0.47UF 25V	1	
C556	KZE1E101	C 100UF 25V	1	
C557	TBB475K1	C 4.7UF 16V	1	
C558	KZE1A471	C 470UF 10V	1	
C559-61	TEB104K5	C 0.1UF 50V	3	
D404.03	MA444	DIODE	2	
D101,02 D104	MA111	DIODE	1	
	S3V60	DIODE		
D107	MA111	DIODE	1	
D109	ERA15-10	DIODE	1	
D201,02	MA165	DIODE	2	
D203,04	MA728	DIODE	2	
D251	YG901C3R	DIODE	1	
D252	MA111	DIODE	1	
D253-55	YG901C3R	DIODE	3	
D301,02	MA165	DIODE	2	
D303,04	MA728	DIODE	2	
D351,52	YG805C06R	DIODE	2	
D355	AG01A	DIODE	1	
D401	YG901C3R	DIODE	1	
D402	AG01	DIODE	1	
D403	YG901C3R	DIODE	1	
D501	S1WBA80	DIODE	1	Δ
D502,03	ERA22-10	DIODE	2	
D505	MA111	DIODE	1	
D506	ST3D82	DIODE	1	
D508	AG01A	DIODE	1	


Ref. No.	Part No.	Part Name & Description	Pcs	Remarks
D511	ERA91-02	DIODE	1	
D551	RK39	DIODE	1	
D554	MA165	DIODE	1	
D555	MA111	DIODE	1	
D556	MA165	DIODE	1	
F201	216005BP	FUSE 250V 5A	1	Δ
F301	216005BP	FUSE 250V 5A	1	Δ
F501	216002BP	FUSE 250V 2A	1	<u>A</u>
IC101	FA5502P	CONTROL	1	
IC401	AN1431T	LINEAR IC	1	
IC501	MIP3E30MP	CONTROL	1	A
				1-1
K101	DG12D1-0	RELAY	1	Δ
K102	DLS12D1-0	RELAY	1	Δ
			-	7-1
L101,02	P3180207Z	CHOKE COIL	2	Δ
L103	ETB44CZ129AD	TRANS	1	1-1
L104	EXCELSR35T	BEAD CHOKE	1	
L106	EXCELSR35T	BEAD CHOKE	1	
L108	EXCELSR35T	BEAD CHOKE	1	
L352,53	EXCELDR35C	BEAD CHOKE	2	
L501	EXCELSA35	BEAD CHOKE	1	
L502	EXCELDR35C	BEAD CHOKE	1	
L302	EXCELDR33C	BEAD CHOKE		
MC101	MP00P7	MODULE	1	Δ
MC201	MLZNC101	MODULE	1	Δ
MC202	MP00R1	MODULE	1	Δ
MC301	MLZNC221	MODULE	1	Δ
MC502	MLWNB103	MODULE	1	Δ
MC601	MLSZA100	MODULE	1	Δ
MC701	MLZDC103	MODULE	1	Δ
P2	B2P3-VH-B	CONNECTOR	1	
P5	B11B-PH-KS	CONNECTOR	1	
P9	B3P4VH-B-L	CONNECTOR	1	Δ
P10	B6B-PH-KS	CONNECTOR	1	
P11	B2P3-VH-B	CONNECTOR	1	
P12	B10B-PH-KS	CONNECTOR	1	
P23	B3B-PH-KS	CONNECTOR	1	
P25	B20B-PHDSS	CONNECTOR	1	
PC503	PS2581A	PHOTO CAPLER	1	Ak
				<u>A</u>
PC505,06	PS2581A	PHOTO CAPLER	2	Δ
0103	2502182	TRANSISTOR	1	
Q103	2SD2185	TRANSISTOR	1	

R135 ERJ6GEYJ103 M 10KOHM,J,1/10W 1 R136 ERJ6ENF3162 M31.6KOHM, 1/10W 1 R137 ERJ6GEYJ123 M 12KOHM,J,1/10W 1 R138 ERJ6GEYJ474 M 470KOHM,J,1/10W 1 R139 ERJ6ENF3302 M 33KOHM, 1/10W 1 R140-42 ERJ6ENF5493 M 549KOHM, 1/10W 3 R143 ERJ6ENF6041 M6.04KOHM, 1/10W 1 R144 ERJ6ENF6191 M6.19KOHM, 1/10W 1 R145 ERJ6GEYJ204 M 200KOHM,J,1/10W 1 R146 ERJ6GEYJ893 M 39KOHM,J,1/10W 1 R147 ERJ6GEYJ893 M 39KOHM,J,1/10W 1 R149 ERJ6GEYJ393 M 39KOHM,J,1/10W 1 R150,51 ERJ6ENF2493 M 249KOHM, 1/10W 2 R201,02 ERJ12YJ221U M 220 OHM,J, 1/2W 2 R203,04 ERJ12YJ220 M 22 OHM,J, 1/2W 2 R205-07 ERJ12YJ683 M 68KOHM, 1/2W 3 R208,09 ERJ6GEYJ103 M 10KOHM,J,1/10W 2	Ref. No.	Part No.	Part Name & Description	Pcs	Remarks
3351,52 28K3813 FET 2 2 3353,54 28B1218A TRANSISTOR 2 2 3353,54 28B1218A TRANSISTOR 1 4 3 3 3 3 3 3 3 3 3	Q106	2SD1819A	TRANSISTOR	1	
Q353,54 Z5B1218A	Q301,02	2SK3568	FET	2	Δ
Q401	Q351,52	2SK3813	FET	2	
Q4092 2SK3302 FET 1 Q4093 2SD601A TRANSISTOR 1 Q4040,50 2SK2391 FET 2 Q406 2SK301A TRANSISTOR 1 Q501 2SK302 FET 1 Q501 2SK302 FET 1 Q551,52 HAT130R FET 2 Q553 2SB710A TRANSISTOR 1 R101 ERC12UGK185 S1.8MOHM, K,1/2W 1 R103 RSB100J W 10 OHM, J,5W 1 R103 RSB100J W 10 OHM, J,5W 1 R103 RSB100J W 10 OHM, J,5W 1 R104 ERJGERP1213 M 121KOHM, J10W 1 R107 ERJGERP1213 M 121KOHM, J10W 1 R108 ERJGERP123 M 12KOHM, J10W 1 R119 ERJGERP3302 M 3KOHM, J10W 1 R114 ERJGERP303 M 10KOHM, J,170W 1 R115 ERJGERP303 M 10KOHM, J,170W	Q353,54	2SB1218A	TRANSISTOR	2	
0404.05 2SN2391 FET 2 0 0404.05 2SN2391 FET 2 2 0404.05 2SN2391 FET 2 2 0406 2SD601A TRANSISTOR 1 0501 2SN2392 FET 1 0502 2SN2731T FET 1 05051.52 NATT 1	Q401	2SA1699	TRANSISTOR	1	
Q404.05 28X2391 FET 2 Q406 28D001A TRANSISTOR 1 Q501 28X3302 FET 1 Q502 28X2731T FET 1 Q551,52 HAT130R FET 2 Q551,52 HAT130R FET 2 Q553 28B710A TRANSISTOR 1 R101 ERC12UGK185 S.1.8MOHM, K,1/2W 1 R103 RSB100J W 10 OHM, J,5W 1 R104 ERJGEPY213 M 121KOHM, 710W 1 R107 ERJGEPY0700 M 0 OHM, J10W 1 R108 ERJGEPY123 M 121KOHM, 710W 1 R109 ERJGEPY18B F 0.18OHM, J,5W 3 R113 ERJGEPY303 M 35KOHM, 710W 1 R115 ERJGEPY3103 M 10KOHM, J,170W 1 R115 ERJGEYJ103 M 30KHM, J,172W 1 R116 ERJ22YJA70 M 47 OHM, J,172W 1 R117 ERJ22YJA70	Q402	2SK3302	FET	1	
Q406	Q403	2SD601A	TRANSISTOR	1	
Section					
QS61_22 2SK2731T FET 1 QS51_52 HATT130R FET 2 QS53 2SB710A TRANSISTOR 1 R101 ERC12UGK185 S.1.8MOHM, K.1/2W 1 R103 RSB100J W 10 OHM, J.5W 1 R103 RSB100J W 10 OHM, J.5W 1 R107 ERJGENF1213 M 121KOHM, 1/10W 1 R108 ERJGENF213 M 121KOHM, 1/10W 1 R108 ERJGENF1213 M 121KOHM, 1/10W 1 R109 ERJGENF213 M 121KOHM, 1/10W 1 R108 ERJGENF123 M 121KOHM, 1/10W 1 R113 ERJGENF302 M 3KOHM, 1/10W 1 R114 ERJGENF2703 M 10KOHM, 1/10W 1 R115 ERJGENF2703 M 10KOHM, 1/10W 1 R116 ERJ12YJ470 M 47 OHM, 1/10W 1 R117 ERJGEYJ103 M 10KOHM, 1/10W 1 R119 ERJGEYJ103 M 10KOHM, 1/10W 1	Q406	2SD601A	TRANSISTOR	1	
QS51.52 HAT1130R FET 2 QS53 2SB710A TRANSISTOR 1 R101 ERC12UGK185 S.1.8MOHM, K,1/2W 1 R103 RSB100J W 10 OHM, J,5W 1 R104-06 ERJGENF1213 M 121KOHM, 1/10W 3 R107 ERJGENF1213 M 121KOHM, 1/10W 1 R108 ERJGENF1213 M 121KOHM, 1/10W 1 R108 ERJGENF1213 M 121KOHM, 1/10W 1 R119 ERJGENF2013 M 121KOHM, 1/10W 1 R119 ERJGENF2020 M 33KOHM, 1/10W 1 R111 ERJGENF27010 M 2.7KOHM, 1/10W 1 R115 ERJGENF2703 M 10KOHM, 1/10W 1 R116 ERJ12YJ470 M 47 OHM, 1/12W 1 R118 ERJGEY1033 M 10KOHM, 1/10W 1 R118 ERJGEY103 M 10KOHM, 1/10W 1 R12 ERJ12YJ470 M 47 OHM, 1/10W 1 R122 ERJGEYJ103 M 10KOHM, 1/10W 1	Q501	2SK3302	FET	1	
QS51,52 HAT1130R FET 2 QS53 28B710A TRANSISTOR 1 R101 ERC12UGK185 S 1.8MOHM, K,1/2W 1 R103 RSB100J W 10 OHM, J,5W 1 R104-06 ERJSENF1213 M 121KOHM, 1/10W 3 R107 ERJSERP1213 M 121KOHM, 1/10W 1 R108 ERJSENF1213 M 121KOHM, 1/10W 1 R109-11 RFSEJR18B F 0.18OHM, J,5W 3 R113 ERJSENF2701 M 2.7KOHM, 1/10W 1 R114 ERJSENF2701 M 2.7KOHM, 1/10W 1 R115 ERJSECYJ103 M 10KOHM, J,1/2W 1 R116 ERJ12YJA70 M 47 OHM, J,1/2W 1 R117 ERJSECYJ103 M 33 OHM, J, 1/2W 1 R118 ERJSECYJ103 M 10KOHM, J,1/10W 1 R119 ERJSECYJ103 M 10KOHM, J,1/10W 1 R120 ERJ12YJ470 M 47 OHM, J,1/10W 1 R121 ERJSECYJ103 M 10KOHM, J,1/10W	Q502	2SK2731T	FET	1	
QS53 2SB710A TRANSISTOR 1 R101 ERC12UGK185 S 1.8MOHM, K,1/2W 1 R103 RSB100J W 10 OHM, J,5W 1 R104-06 ERJEEMF1213 M 121KOHM, 1/10W 3 R107 ERJGEPOR00 M 0 OHM, 1/10W 1 R108 ERJEEMF1213 M 121KOHM, 1/10W 1 R109-11 RFSEJR18B F 0.18OHM, 1/10W 1 R113 ERJGENF302 M 33KOHM, 1/10W 1 R114 ERJEEMF2701 M 2.7KOHM, 1/10W 1 R115 ERJGEYJ103 M 10KOHM, 1/10W 1 R116 ERJ12YJA70 M 47 OHM, 1/12W 1 R117 ERJ12YJA30 M 33 OHM, 1/12W 1 R118 ERJGEYJ103 M 10KOHM, 1/10W 1 R119 ERJGEYJ103 M 10KOHM, 1/10W 1 R120 ERJ12YJ470 M 47 OHM, 1/10W 1 R122 ERJGEYJ103 M 10KOHM, 1/10W 1 R123 ERJGEYJ10A M 15KOHM, 1/10W 1<	Q551.52	HAT1130R		2	
R101 ERC12UGK185 S.1.8MOHM, K,1/2W 1 R103 R5B100J W10 OHM, J,5W 1 R104-06 ERJEENF1213 M 121KOHM, 1/10W 3 R107 ERJEGEY0R00 M 0 OHM, 1/10W 1 R108 ERJEENF1213 M 121KOHM, 1/10W 1 R108 ERJEENF1213 M 121KOHM, 1/10W 1 R109-11 R7SEJR18B F 0.180HM, J,5W 3 R113 ERJEENF302 M 33KOHM, 1/10W 1 R114 ERJEENF2701 M 2.7KOHM, 1/10W 1 R115 ERJEGEYJ103 M 10KOHM, J,1/10W 1 R116 ERJ12YJ470 M 47 OHM, J,1/2W 1 R117 ERJ12YJ330 M 33 OHM, J, 1/2W 1 R118 ERJEGEYJ103 M 10KOHM, J,1/10W 1 R119 ERJEGEYJ101 M 100 OHM, J,1/10W 1 R110 ERJEGEYJ101 M 100 OHM, J,1/10W 1 R120 ERJ12YJ470 M 47 OHM, J,1/10W 1 R120 ERJ12YJ470 M 47 OHM, J,1/10W 1 R122 ERJEGEYJ101 M 100 OHM, J,1/10W 1 R123 ERJEGEYJ103 M 10KOHM, J,1/10W 1 R124 ERJEGEYJ103 M 10KOHM, J,1/10W 1 R125 ERJ12YJ470 M 47 OHM, J,1/10W 1 R126 ERJ12YJ470 M 49 OHM, J,1/10W 1 R127-29 ERJEGEYJ183 M 18KOHM, J,1/10W 1 R131 ERSEGEYJ103 M 10KOHM, J,1/10W 1 R131 ERSEGEYJ103 M 10KOHM, J,1/10W 1 R132 ERJEGEYJ103 M 10KOHM, J,1/10W 1 R133 ERJEGEYJ103 M 10KOHM, J,1/10W 1 R134 ERJEGEYJ103 M 10KOHM, J,1/10W 1 R135 ERJEGEYJ103 M 10KOHM, J,1/10W 1 R136 ERJEGEYJ103 M 10KOHM, J,1/10W 1 R137 ERJEGEYJ103 M 10KOHM, J,1/10W 1 R138 ERJEGEYJ103 M 10KOHM, J,1/10W 1 R139 ERJEGEYJ103 M 10KOHM, J,1/10W 1 R131 ERSEGEYJ103 M 10KOHM, J,1/10W 1 R132 ERJEGEYJ103 M 10KOHM, J,1/10W 1 R135 ERJEGEYJ103 M 10KOHM, J,1/10W 1 R136 ERJEGEYJ103 M 10KOHM, J,1/10W 1 R137 ERJEGEYJ103 M 10KOHM, J,1/10W 1 R138 ERJEGEYJ103 M 10KOHM, J,1/10W 1 R139 ERJEGEYJ103 M 10KOHM, J,1/10W 1 R144 ERJEENF6493 M 3SKOHM, J/10W 1 R145 ERJEGEYJ103 M 10KOHM, J,1/10W 1 R146 ERJEGEYJ204 M 470KOHM, J,1/10W 1 R147 ERJEGEYJ204 M 470KOHM, J,1/10W 1 R148 ERJEGEYJ303 M 3SKOHM, J,1/10W 1 R149 ERJEGEYJ303 M 3SKOHM, J,1/10W 1 R141 ERJEGEYJ303 M 3SKOHM, J,1/10W 1 R142 ERJEGEYJ303 M 3SKOHM, J,1/10W 1 R144 ERJEGEYJ604 M 680KOHM, J,1/10W 1 R145 ERJEGEYJ303 M 3SKOHM, J,1/10W 1 R146 ERJEGEYJ303 M 3SKOHM, J,1/10W 1 R147 ERJEGEYJ303 M 3SKOHM, J,1/10W 1 R148 ERJEGEYJ303 M 3SKOHM, J,1/10W 1 R149 ERJEGEYJ303 M 3SKOHM, J,1/10W 1 R150,01 ERJEZYJ22U M 22 OHM, J,1/10W 2 ERJEZYJ22U M 22 OHM, J,1/	· ·				
R103 R5B100J W 10 OHM, J, 5W 1 R104-06 ERJEENF1213 M 12 KICHM, 1/10W 3 R106-06 ERJEENF1213 M 12 KICHM, 1/10W 1 R107 ERJGEY0R00 M 0 OHM, 1/10W 1 R108 ERJGENF1213 M 12 KICHM, 1/10W 1 R109-11 RF5EJR18B F 0.18 OHM, J, 5W 3 R113 ERJGENF3302 M 33 KOHM, 1/10W 1 R114 ERJGENF2701 M 2.7 KOHM, 1/10W 1 R115 ERJGEYJ103 M 10 KOHM, J, 1/10W 1 R116 ERJ2YJ470 M 47 OHM, J, 1/12W 1 R117 ERJ12YJ330 M 33 OHM, J, 1/12W 1 R118 ERJGEYJ103 M 10 KOHM, J, 1/10W 1 R119 ERJGEYJ101 M 100 OHM, J, 1/10W 1 R119 ERJGEYJ101 M 100 OHM, J, 1/10W 1 R120 ERJ12YJ470 M 47 OHM, J, 1/12W 1 R120 ERJGEYJ104 M 150 KOHM, J, 1/10W 1 R122 ERJGEYJ104 M 150 KOHM, J, 1/10W 1 R123 ERJGEYJ103 M 10 KOHM, J, 1/10W 1 R126 ERJGEYJ104 M 150 KOHM, J, 1/10W 1 R127-29 ERJGEYJ103 M 10 KOHM, J, 1/10W 1 R130 ERJGEYJ104 M 10 KOHM, J, 1/10W 1 R131 ERJGEYJ104 M 10 KOHM, J, 1/10W 1 R132 ERJGEYJ104 M 10 KOHM, J, 1/10W 1 R131 ERJGEYJ104 M 10 KOHM, J, 1/10W 1 R132 ERJGEYJ104 M 10 KOHM, J, 1/10W 1 R136 ERJGEYJ103 M 10 KOHM, J, 1/10W 1 R137 ERJGERJ124 M 10 KOHM, J, 1/10W 1 R138 ERJGEYJ103 M 10 KOHM, J, 1/10W 1 R139 ERJGERJ124 M 10 KOHM, J, 1/10W 1 R130 ERJGERJ124 M 10 KOHM, J, 1/10W 1 R131 ERJGERJ124 M 10 KOHM, J, 1/10W 1 R132 ERJGERJ124 M 10 KOHM, J, 1/10W 1 R133 ERJGERJ124 M 10 KOHM, J, 1/10W 1 R136 ERJGERJ124 M 10 KOHM, J, 1/10W 1 R137 ERJGERJ124 M 10 KOHM, J, 1/10W 1 R138 ERJGERJ124 M 10 KOHM, J, 1/10W 1 R139 ERJGERJ124 M 10 KOHM, J, 1/10W 1 R140-42 ERJGENF5493 M 549 KOHM, J, 1/10W 1 R140 ERJGERJ302 M 33 KOHM, J, 1/10W 1 R141 ERJGERJ504 M 10 KOHM, J, 1/10W 1 R144 ERJGENF6191 M6.19 KOHM, J, 1/10W 1 R145 ERJGERJ303 M 39 KOHM, J, 1/10W 1 R146 ERJGERJ303 M 39 KOHM, J, 1/10W 1 R147 ERJGEYJ303 M 39 KOHM, J, 1/10W 1 R148 ERJGERJ504 M 20 KOHM, J, 1/10W 1 R149 ERJGERJ504 M 20 KOHM, J, 1/10W 1 R140 ERJGERJ504 M 20 KOHM, J, 1/10W 1 R150,51 ERJGERJ5030 M 30 KOHM, J, 1/10W 2 ERJGSOG ERJGEYJ303 M 30 KOHM, J					
R103 R5B100J W 10 OHM, J, 5W 1 R104-06 ERJEENF1213 M 12 KICHM, 1/10W 3 R106-06 ERJEENF1213 M 12 KICHM, 1/10W 1 R107 ERJGEY0R00 M 0 OHM, 1/10W 1 R108 ERJGENF1213 M 12 KICHM, 1/10W 1 R109-11 RF5EJR18B F 0.18 OHM, J, 5W 3 R113 ERJGENF3302 M 33 KOHM, 1/10W 1 R114 ERJGENF2701 M 2.7 KOHM, 1/10W 1 R115 ERJGEYJ103 M 10 KOHM, J, 1/10W 1 R116 ERJ2YJ470 M 47 OHM, J, 1/12W 1 R117 ERJ12YJ330 M 33 OHM, J, 1/12W 1 R118 ERJGEYJ103 M 10 KOHM, J, 1/10W 1 R119 ERJGEYJ101 M 100 OHM, J, 1/10W 1 R119 ERJGEYJ101 M 100 OHM, J, 1/10W 1 R120 ERJ12YJ470 M 47 OHM, J, 1/12W 1 R120 ERJGEYJ104 M 150 KOHM, J, 1/10W 1 R122 ERJGEYJ104 M 150 KOHM, J, 1/10W 1 R123 ERJGEYJ103 M 10 KOHM, J, 1/10W 1 R126 ERJGEYJ104 M 150 KOHM, J, 1/10W 1 R127-29 ERJGEYJ103 M 10 KOHM, J, 1/10W 1 R130 ERJGEYJ104 M 10 KOHM, J, 1/10W 1 R131 ERJGEYJ104 M 10 KOHM, J, 1/10W 1 R132 ERJGEYJ104 M 10 KOHM, J, 1/10W 1 R131 ERJGEYJ104 M 10 KOHM, J, 1/10W 1 R132 ERJGEYJ104 M 10 KOHM, J, 1/10W 1 R136 ERJGEYJ103 M 10 KOHM, J, 1/10W 1 R137 ERJGERJ124 M 10 KOHM, J, 1/10W 1 R138 ERJGEYJ103 M 10 KOHM, J, 1/10W 1 R139 ERJGERJ124 M 10 KOHM, J, 1/10W 1 R130 ERJGERJ124 M 10 KOHM, J, 1/10W 1 R131 ERJGERJ124 M 10 KOHM, J, 1/10W 1 R132 ERJGERJ124 M 10 KOHM, J, 1/10W 1 R133 ERJGERJ124 M 10 KOHM, J, 1/10W 1 R136 ERJGERJ124 M 10 KOHM, J, 1/10W 1 R137 ERJGERJ124 M 10 KOHM, J, 1/10W 1 R138 ERJGERJ124 M 10 KOHM, J, 1/10W 1 R139 ERJGERJ124 M 10 KOHM, J, 1/10W 1 R140-42 ERJGENF5493 M 549 KOHM, J, 1/10W 1 R140 ERJGERJ302 M 33 KOHM, J, 1/10W 1 R141 ERJGERJ504 M 10 KOHM, J, 1/10W 1 R144 ERJGENF6191 M6.19 KOHM, J, 1/10W 1 R145 ERJGERJ303 M 39 KOHM, J, 1/10W 1 R146 ERJGERJ303 M 39 KOHM, J, 1/10W 1 R147 ERJGEYJ303 M 39 KOHM, J, 1/10W 1 R148 ERJGERJ504 M 20 KOHM, J, 1/10W 1 R149 ERJGERJ504 M 20 KOHM, J, 1/10W 1 R140 ERJGERJ504 M 20 KOHM, J, 1/10W 1 R150,51 ERJGERJ5030 M 30 KOHM, J, 1/10W 2 ERJGSOG ERJGEYJ303 M 30 KOHM, J	R101	ERC12UGK185	S 1.8MOHM. K.1/2W	1	
R104-06 ERJ6ENF1213 M 121KOHM, 1/10W 3 R107 ERJ6GEY0R00 M 0 OHM, 1/10W 1 R108 ERJ6ENF1213 M 121KOHM, 1/10W 1 R108 ERJ6ENF1213 M 121KOHM, 1/10W 1 R109-11 RF5EJR18B F 0.180-HM, J, 5W 3 R113 ERJ6ENF3302 M 33KOHM, 1/10W 1 R114 ERJ6ENF2701 M 7.KOHM, 1/10W 1 R115 ERJ6GEYJ103 M 10KOHM, 1/10W 1 R116 ERJ12YJ470 M 74 OHM, J, 1/2W 1 R117 ERJ12YJ330 M 33 OHM, J, 1/2W 1 R118 ERJ6GEYJ103 M 10KOHM, J, 1/10W 1 R119 ERJ6GEYJ101 M 100 OHM, J, 1/10W 1 R120 ERJ12YJ470 M 74 OHM, J, 1/2W 1 R122 ERJ6GEYJ101 M 100 OHM, J, 1/10W 1 R123 ERJ6GEYJ154 M 150KOHM, J, 1/10W 1 R125 ERJ12YJ470 M 74 OHM, J, 1/10W 1 R126 ERJ6EYJ154 M 150KOHM, J, 1/10W 1 R127-29 ERJ6GEYJ154 M 150KOHM, J, 1/10W 1 R127-29 ERJ6GEYJ103 M 10KOHM, J, 1/10W 1 R128 ERJ6GEYJ103 M 10KOHM, J, 1/10W 1 R130 ERJ6GEYJ104 M 10KOHM, J, 1/10W 1 R131 ER0SCKF4993 M 49KOHM, F, 1/4W 1 R132 ERJ6EYJ104 M 10KOHM, J, 1/10W 1 R134 ERJ6EYJ103 M 10KOHM, J, 1/10W 1 R135 ERJ6EYJ104 M 10KOHM, J, 1/10W 1 R136 ERJ6EYJ103 M 10KOHM, J, 1/10W 1 R137 ERJ6GEYJ103 M 10KOHM, J, 1/10W 1 R138 ERJ6GEYJ103 M 10KOHM, J, 1/10W 1 R139 ERJ6ENF2493 M 29KOHM, F, 1/4W 1 R139 ERJ6ENF2493 M 29KOHM, F, 1/4W 1 R139 ERJ6ENF3162 M31.6KOHM, 1/10W 1 R139 ERJ6GEYJ103 M 10KOHM, J, 1/10W 1 R139 ERJ6ENF3162 M31.6KOHM, 1/10W 1 R130 ERJ6GEYJ103 M 10KOHM, J, 1/10W 1 R131 EROSCKF4993 M 39KOHM, 1/10W 1 R132 ERJ6GEYJ103 M 10KOHM, J, 1/10W 1 R134 ERJ6ENF2493 M 24WOHM, 1/10W 1 R135 ERJ6GEYJ103 M 10KOHM, J, 1/10W 1 R136 ERJ6ENF3162 M31.6KOHM, 1/10W 1 R137 ERJ6GEYJ103 M 10KOHM, J, 1/10W 1 R138 ERJ6GEYJ393 M 39KOHM, 1/10W 1 R140-42 ERJ6ENF2493 M 24WOHM, 1/10W 1 R144 ERJ6ENF2493 M 24WOHM, 1/10W 1 R145 ERJ6GEYJ393 M 39KOHM, 1/10W 1 R146 ERJ6GEYJ393 M 39KOHM, 1/10W 1 R147 ERJ6GEYJ393 M 39KOHM, 1/10W 1 R148 ERJ6ENF2493 M 24WOHM, 1/10W 1 R149 ERJ6ENF2493 M 24WOHM, 1/10W 1 R149 ERJ6ENF2493 M 24WOHM, 1/10W 1 R149 ERJ6EYJ200 M 22WOHM, 1/10W 2 R201,00 ERJ12YJ220 M 22 OHM, 1, 1/2W 2 R203,00 ERJ6EYJ303 M 39KOHM, 1/2W 3 R208,00 ERJ6EYJ103 M 10KOHM, 1/10W 2			<u> </u>		
R107 ERJ6GEY0R00 M 0 OHM, 1/10W 1 R108 ERJ6GENF1213 M 121KOHM, 1/10W 1 R109-11 RF5EJR18B F 0.180HM, J, 5W 3 R113 ERJ6ENF3302 M 33KOHM, 1/10W 1 R114 ERJ6ENF2701 M 2.7KOHM, 1/10W 1 R115 ERJ6GEYJ103 M 10KOHM, J, 1/10W 1 R116 ERJ12YJ470 M 47 OHM, J, 1/2W 1 R117 ERJ12YJ470 M 47 OHM, J, 1/2W 1 R118 ERJ6GEYJ103 M 10KOHM, J, 1/10W 1 R119 ERJ6GEYJ103 M 10KOHM, J, 1/10W 1 R119 ERJ6GEYJ101 M 100 OHM, J, 1/2W 1 R110 ERJ12YJ470 M 47 OHM, J, 1/2W 1 R112 ERJ12YJ470 M 47 OHM, J, 1/2W 1 R120 ERJ12YJ470 M 47 OHM, J, 1/2W 1 R121 ERJ6GEYJ101 M 100 OHM, J, 1/10W 1 R122 ERJ6GEYJ103 M 10KOHM, J, 1/10W 1 R123 ERJ6GEYJ103 M 10KOHM, J, 1/10W 1 R124 ERJ6GEYJ103 M 10KOHM, J, 1/10W 1 R125 ERJ12YJ470 M 47 OHM, J, 1/2W 1 R127-29 ERJ6GEYJ103 M 10KOHM, J, 1/10W 1 R130 ERJ6GEYJ103 M 10KOHM, J, 1/10W 3 R131 EROS2CKF4993 M 18KOHM, J, 1/10W 1 R131 EROS2CKF4993 M 498KOHM, F, 1/4W 1 R134 ERJ6GEYJ103 M 10KOHM, J, 1/10W 1 R135 ERJ6GEYJ103 M 10KOHM, J, 1/10W 1 R136 ERJ6GEYJ103 M 10KOHM, J, 1/10W 1 R137 ERJ6GEYJ103 M 10KOHM, J, 1/10W 1 R138 ERJ6GEYJ103 M 10KOHM, J, 1/10W 1 R139 ERJ6GEYJ103 M 10KOHM, J, 1/10W 1 R140 ERJ6GEYJ103 M 10KOHM, J, 1/10W 1 R141 ERJ6GEYJ64 M 470KOHM, J, 1/10W 1 R145 ERJ6GEYJ64 M M 470KOHM, J, 1/10W 1 R146 ERJ6GEYJ693 M 38KOHM, 1/10W 1 R147 ERJ6GEYJ103 M 12KOHM, J, 1/10W 1 R146 ERJ6GEYJ894 M 880KOHM, 1/10W 1 R147 ERJ6GEYJ993 M 39KOHM, 1/10W 1 R148 ERJ6GEYJ894 M 880KOHM, 1/10W 1 R149 ERJ6GEYJ993 M 39KOHM, 1/10W 1 R149 ERJ6GEYJ893 M 39KOHM, 1/10W 1			. ,		
R108 ERJ6ENF1213 M 121KOHM, 1/10W 1 R109-11 RFSEJR18B F 0.180HM, J, SW 3 R113 ERJ6ENF3302 M 33KOHM, 1/10W 1 R114 ERJ6ENF3701 M 2.7KOHM, 1/10W 1 R115 ERJ6GEYJ103 M 10KOHM, J, 1/10W 1 R116 ERJ12YJ470 M 47 OHM, J, 1/2W 1 R117 ERJ12YJ330 M 33 OHM, J, 1/2W 1 R118 ERJ6GEYJ103 M 10KOHM, J, 1/10W 1 R119 ERJ6GEYJ101 M 100 OHM, J, 1/10W 1 R120 ERJ12YJ470 M 47 OHM, J, 1/2W 1 R120 ERJ12YJ470 M 47 OHM, J, 1/2W 1 R122 ERJ6GEYJ101 M 100 OHM, J, 1/10W 1 R120 ERJ12YJ470 M 47 OHM, J, 1/2W 1 R122 ERJ6GEYJ103 M 10KOHM, J, 1/10W 1 R123 ERJ6GEYJ103 M 10KOHM, J, 1/10W 1 R124 ERJ6GEYJ103 M 10KOHM, J, 1/10W 1 R125 ERJ12YJ470 M 47 OHM, J, 1/2W 1 R127-29 ERJ6GEYJ183 M 18KOHM, J, 1/10W 3 R130 ERJ6GEYJ103 M 10KOHM, J, 1/10W 1 R131 ER0S2CKF4993 M 499KOHM, F, 1/4W 1 R132,33 ERJ6ENF2493 M 249KOHM, 1/10W 2 R134 ERJ6GEYJ103 M 10KOHM, J, 1/10W 1 R135 ERJ6GEYJ103 M 10KOHM, J, 1/10W 1 R136 ERJ6GEYJ103 M 10KOHM, J, 1/10W 1 R137 ERJ6GEYJ103 M 10KOHM, J, 1/10W 1 R138 ERJ6GEYJ103 M 10KOHM, J, 1/10W 1 R139 ERJ6GEYJ103 M 10KOHM, J, 1/10W 1 R139 ERJ6GEYJ103 M 10KOHM, J, 1/10W 1 R138 ERJ6GEYJ103 M 10KOHM, J, 1/10W 1 R139 ERJ6GEYJ103 M 10KOHM, J, 1/10W 1 R140-42 ERJ6GEYJ64 M 47 OKOHM, J, 1/10W 1 R141 ERJ6ENF5493 M 33KOHM, 1/10W 1 R142 ERJ6ENF5493 M 549KOHM, 1/10W 1 R143 ERJ6ENF5493 M 549KOHM, 1/10W 1 R144 ERJ6ENF6041 M 6.9KOHM, J, 1/10W 1 R145 ERJ6ENF5493 M 549KOHM, 1/10W 1 R146 ERJ6ENF5493 M 549KOHM, 1/10W 1 R147 ERJ6GEYJ393 M 39KOHM, 1/10W 1 R148 ERJ6ENF5493 M 549KOHM, 1/10W 1 R149 ERJ6ENF5493 M 39KOHM, 1/10W 1 R140 ERJ6EYJ393 M 39KOHM, 1/10W 1 R140 ERJ6EYJ393 M 39KOHM, 1/10W 1 R141 ERJ6ENF5493 M 549KOHM, 1/10W 1 R145 ERJ6ERY393 M 39KOHM, 1/10W 1 R146 ERJ6EYJ393 M 39KOHM, 1/10W 1 R147 ERJ6EYJ393 M 39KOHM, 1/10W 1 R149 ERJ6ERY393 M 39KOHM, 1/10W 1 R149 ERJ6ENF5493 M 549KOHM, 1/10W 2 R201,02 ERJ12YJ220 M 22 OHM, 1/10W 2 R203,04 ERJ12YJ220 M 22 OHM, 1/10W 2			· ·		
R109-11 RF5EJR18B F 0.18OHM, J, 5W 3 R113 ERJ6ENF3302 M 33KOHM, 1/10W 1 R114 ERJ6ENF2701 M 2.7KOHM, 1/10W 1 R115 ERJ6GEYJ103 M 10KOHM, J,1/10W 1 R116 ERJ12YJ470 M 47 OHM, J,1/2W 1 R117 ERJ12YJ330 M 33 OHM, J, 1/2W 1 R118 ERJ6GEYJ103 M 10KOHM, J,1/10W 1 R119 ERJ6GEYJ101 M 100 OHM, J,1/10W 1 R119 ERJ6GEYJ101 M 100 OHM, J,1/10W 1 R120 ERJ12YJ470 M 47 OHM, J,1/10W 1 R121 ERJ6GEYJ103 M 10KOHM, J,1/10W 1 R122 ERJ6GEYJ103 M 10KOHM, J,1/10W 1 R123 ERJ6GEYJ103 M 10KOHM, J,1/10W 1 R124 ERJ6GEYJ103 M 10KOHM, J,1/10W 1 R152 ERJ12YJ470 M 47 OHM, J,1/10W 1 R153 ERJ6GEYJ103 M 10KOHM, J,1/10W 3 R154 ERJ6GEYJ103 M 10KOHM, J,1/10W 1 R154 ERJ6GEYJ103 M 10KOHM, J,1/10W 1 R155 ERJ6GEYJ103 M 10KOHM, J,1/10W 1 R156 ERJ6GEYJ103 M 10KOHM, J,1/10W 1 R157 ERJ6GEYJ103 M 10KOHM, J,1/10W 1 R157 ERJ6GEYJ103 M 10KOHM, J,1/10W 1 R158 ERJ6GEYJ103 M 10KOHM, J,1/10W 1 R159 ERJ6GEYJ103 M 10KOHM, J,1/10W 1 R136 ERJ6GEYJ103 M 10KOHM, J,1/10W 1 R137 ERJ6GEYJ103 M 10KOHM, J,1/10W 1 R138 ERJ6GEYJ103 M 10KOHM, J,1/10W 1 R139 ERJ6GEYJ103 M 10KOHM, J,1/10W 1 R139 ERJ6GEYJ103 M 10KOHM, J,1/10W 1 R140-42 ERJ6ENF3403 M 38KOHM, 1/10W 1 R144 ERJ6ENF5403 M 549KOHM, 1/10W 1 R145 ERJ6GEYJ204 M 200KOHM, J,1/10W 1 R146 ERJ6GEYJ303 M 549KOHM, 1/10W 1 R147 ERJ6GEYJ303 M 549KOHM, 1/10W 1 R148 ERJ6ENF5403 M 549KOHM, 1/10W 1 R149 ERJ6GEYJ303 M 39KOHM, J,1/10W 1 R150,51 ERJ6ENF2403 M 249KOHM, J,1/10W 1 R161 ERJ6ENF3403 M 249KOHM, J,1/10W 1 R161 ERJ6ENF3403 M 249KOHM, J,1/10W 1 R162 ERJ6EYJ303 M 39KOHM, J,1/10W 1 R164 ERJ6EYJ303 M 39KOHM, J,1/10W 1 R1650-FI ERJ6ENF3403 M 249KOHM, J,1/10W 1 R1690-FI ERJ6ENF3403 M 249KOHM, J,1/10W 1 R1690-FI ERJ6ENF3403 M 249KOHM, J,1/10W 2 R200-FI ERJ12YJ220 M 22 OHM, J, J/10W 2 R200-FI ERJ12YJ220 M 22 OHM, J, J/10W 2 R200-FI ERJ12YJ220 M 22 OHM, J, J/10W 2			<u> </u>		
R113 ERJ6ENF3302 M 33KOHM, 1/10W 1 R114 ERJ6ENF2701 M 2.7KOHM, 1/10W 1 R115 ERJ6GEYJ103 M 10KOHM, J,1/10W 1 R116 ERJ12YJ470 M 47 OHM, J,1/2W 1 R117 ERJ12YJ330 M 33 OHM, J, 1/2W 1 R118 ERJ6GEYJ103 M 10KOHM, J,1/10W 1 R119 ERJ6GEYJ101 M 100 OHM, J,1/10W 1 R119 ERJ6GEYJ101 M 100 OHM, J,1/10W 1 R120 ERJ12YJ470 M 47 OHM, J,1/10W 1 R121 ERJ6GEYJ154 M 150KOHM, J,1/10W 1 R122 ERJ6GEYJ154 M 150KOHM, J,1/10W 1 R123 ERJ6GEYJ153 M 10KOHM, J,1/10W 1 R124 ERJ6GEYJ153 M 10KOHM, J,1/10W 1 R155 ERJ12YJ470 M 47 OHM, J,1/10W 1 R175 ERJ6GEYJ183 M 10KOHM, J,1/10W 1 R175 ERJ6GEYJ183 M 10KOHM, J,1/10W 1 R176 ERJ6GEYJ104 M 100KOHM, J,1/10W 1 R177 ERJ6GEYJ104 M 100KOHM, J,1/10W 1 R178 ERJ6GEYJ104 M 100KOHM, J,1/10W 1 R179 ERJ6GEYJ103 M 10KOHM, J,1/10W 1 R170 ERJ6GEYJ393 M 39KOHM, J,1/10W 2 R170 ERJ6GEY			· · · · · · · · · · · · · · · · · · ·		
R114 ERJGENF2701 M 2.7KOHII, 1/10W 1 R115 ERJGEYJ103 M 10KOHM_J,1/10W 1 R116 ERJ12YJ470 M 47 OHM, J,1/2W 1 R117 ERJ12YJ330 M 33 OHM_J,1/2W 1 R118 ERJGEGYJ103 M 10KOHM_J,1/10W 1 R119 ERJGEGYJ101 M 100 OHM_J,1/10W 1 R120 ERJ12YJ470 M 47 OHM, J,1/2W 1 R122 ERJGEYJ154 M 150KOHM_J,1/10W 1 R123 ERJGGEYJ154 M 150KOHM_J,1/10W 1 R124 ERJGEYJ155 M 10KOHM_J,1/10W 1 R125 ERJ12YJ470 M 47 OHM, J,1/10W 1 R126 ERJ12YJ470 M 47 OHM, J,1/10W 1 R127-29 ERJGEYJ133 M 10KOHM_J,1/10W 3 R130 ERJGGEYJ103 M 10KOHM_J,1/10W 3 R130 ERJGGEYJ104 M 100KOHM_J,1/10W 1 R131 ER052CKF4993 M 499KOHM, F,1/4W 1 R132,33 ERJGENF2493 M 499KOHM, F,1/4W 1 R134 ERJGEYJ470 M 47 OHM_J,1/10W 1 R135 ERJGEYJ470 M 47 OHM_J,1/10W 1 R136 ERJGEYJ470 M 47 OHM_J,1/10W 1 R137 ERJGEYJ470 M 47 OHM_J,1/10W 1 R138 ERJGEYJ470 M 47 OHM_J,1/10W 1 R139 ERJGENF3162 M31.6KOHM, 1/10W 1 R139 ERJGENF3162 M31.6KOHM, 1/10W 1 R139 ERJGENF3302 M 38KOHM, 1/10W 1 R139 ERJGENF3302 M 38KOHM, 1/10W 1 R140-42 ERJGENF3493 M 549KOHM, 1/10W 1 R141 ERJGEYJ474 M 470KOHM,J,1/10W 1 R142 ERJGENF3493 M 549KOHM, 1/10W 1 R143 ERJGENF3493 M 549KOHM, 1/10W 1 R144 ERJGENF3493 M 549KOHM, 1/10W 1 R145 ERJGENF3493 M 549KOHM, 1/10W 1 R146 ERJGEYJ884 M 680KOHM, 1/10W 1 R147 ERJGEYJ984 M 100KOHM,J,1/10W 1 R149 ERJGEYJ993 M 39KOHM,J,1/10W 1 R140-02 ERJ12YJ22U M 22 OHM,J,1/10W 2 R201,002 ERJ12YJ22U M 22 OHM,J, 1/2W 2 R205-07 ERJ12YJ683 M 68KOHM,J,1/10W 3					
R115 ERJ6GEYJ103 M 10KOHM,J,1/10W 1 R116 ERJ12YJ470 M 47 OHM, J,1/2W 1 R117 ERJ12YJ330 M 33 OHM,J, 1/2W 1 R118 ERJ6GEYJ103 M 10KOHM,J,1/10W 1 R119 ERJ6GEYJ101 M 10KOHM,J,1/10W 1 R119 ERJ6GEYJ101 M 10KOHM,J,1/10W 1 R120 ERJ12YJ470 M 47 OHM, J,1/2W 1 R122 ERJ6GEYJ154 M 150KOHM,J,1/10W 1 R123 ERJ6GEYJ153 M 10KOHM,J,1/10W 1 R124 ERJ6GEYJ154 M 150KOHM,J,1/10W 1 R125 ERJ12YJ470 M 47 OHM, J,1/2W 1 R127-29 ERJ6GEYJ183 M 18KOHM,J,1/10W 3 R126 ERJ6GEYJ183 M 18KOHM,J,1/10W 1 R1310 ERJ6GEYJ104 M 100KOHM,J,1/10W 1 R131 ER052CKF4993 M 499KOHM, F,1/4W 1 R132,33 ERJ6GEYJ493 M 249KOHM, 1/10W 2 R134 ERJ6GEYJ470 M 47 OHM,J,1/10W 1 R135 ERJ6GEYJ470 M 47 OHM,J,1/10W 1 R136 ERJ6GEYJ103 M 10KOHM,J,1/10W 1 R137 ERJ6GEYJ103 M 10KOHM,J,1/10W 1 R138 ERJ6GEYJ103 M 12KOHM,J,1/10W 1 R139 ERJ6GEYJ123 M 12KOHM,J,1/10W 1 R139 ERJ6GEYJ474 M 470KOHM,J,1/10W 1 R140-42 ERJ6ENF5493 M 549KOHM, 1/10W 1 R143 ERJ6ENF5493 M 549KOHM, 1/10W 1 R144 ERJ6GEYJ474 M 470KOHM,J,1/10W 1 R145 ERJ6GEYJ6H M 6.04KOHM,J,1/10W 1 R146 ERJ6GEYJ6H M 6.04KOHM,J,1/10W 1 R147 ERJ6ENF5493 M 59KOHM,J,1/10W 1 R148 ERJ6ENF5493 M 59KOHM,J,1/10W 1 R149 ERJ6EYJ294 M 20KOHM,J,1/10W 1 R149 ERJ6GEYJ393 M 39KOHM,J,1/10W 1 R150,51 ERJ6ENF2493 M 249KOHM,J,1/10W 2 R201,02 ERJ12YJ221U M 22 OHM,J, 1/2W 2 R203,04 ERJ12YJ221U M 22 OHM,J, 1/2W 2 R205-07 ERJ12YJ683 M 68KOHM,J,1/10W 3			-		
R116 ERJ12YJ470 M 47 OHM, J,1/2W 1 R117 ERJ12YJ330 M 33 OHM,J, 1/2W 1 R118 ERJ6GEYJ103 M 10KOHM,J,1/10W 1 R119 ERJ6GEYJ101 M 100 OHM,J,1/10W 1 R120 ERJ12YJ470 M 47 OHM, J,1/2W 1 R122 ERJ6GEYJ154 M 150KOHM,J,1/10W 1 R123 ERJ6GEYJ103 M 10KOHM,J,1/10W 1 R125 ERJ12YJ470 M 47 OHM, J,1/2W 1 R126 ERJ12YJ470 M 47 OHM, J,1/2W 1 R170 ERJ6GEYJ183 M 10KOHM,J,1/10W 1 R170 ERJ6GEYJ183 M 10KOHM,J,1/10W 3 R170 ERJ6GEYJ183 M 10KOHM,J,1/10W 1 R170 ERJ6GEYJ184 M 100KOHM,J,1/10W 1 R170 ERJ6GEYJ194 M 100KOHM,J,1/10W 1 R171 EROSZCKF4993 M 499KOHM, F,1/4W 1 R171 EROSZCKF4993 M 10KOHM,J,1/10W 1 R171 ERJ6GEYJ470 M 47 OHM,J,1/10W 1 R171 ERJ6GEYJ470 M 47 OHM,J,1/10W 1 R171 ERJ6GEYJ103 M 10KOHM,J,1/10W 1 R171 ERJ6GEYJ474 M 470KOHM,J,1/10W 1 R171 ERJ6GEYJ474 M 470KOHM,J,1/10W 1 R171 ERJ6GEYJ474 M 470KOHM,J,1/10W 1 R171 ERJ6GEYJ493 M 549KOHM, 1/10W 1 R171 ERJ6GEYJ494 M 660KOHM,J,1/10W 1 R171 ERJ6GEYJ494 M 660KOHM,J,1/10W 1 R171 ERJ6GEYJ294 M M 10KOHM,J,1/10W 1 R171 ERJ6GEYJ294 M M 10KOHM,J,1/10W 1 R171 ERJ6GEYJ393 M 39KOHM,J,1/10W 1 R172 ERJ6GEYJ393 M 39KOHM,J,1/10W 1			•		
R117 ERJ12YJ330 M 33 OHM,J, 1/2W 1 R118 ERJ6GEYJ103 M 10KOHM,J,1/10W 1 R119 ERJ6GEYJ101 M 100 OHM,J,1/10W 1 R120 ERJ12YJ470 M 47 OHM, J,1/2W 1 R122 ERJ6GEYJ154 M 150KOHM,J,1/10W 1 R123 ERJ6GEYJ103 M 10KOHM,J,1/10W 1 R125 ERJ12YJ470 M 47 OHM, J,1/2W 1 R127-29 ERJ6GEYJ183 M 18KOHM,J,1/10W 3 R130 ERJ6GEYJ104 M 100KOHM,J,1/10W 1 R131 ER0S2CKF4993 M 499KOHM,F,1/4W 1 R132 ERJ6ENF2493 M 249KOHM, 1/10W 2 R134 ERJ6ENF2493 M 499KOHM, 1/10W 1 R135 ERJ6GEYJ103 M 10KOHM,J,1/10W 1 R136 ERJ6ENF3162 M31.6KOHM, 1/10W 1 R137 ERJ6ENF3162 M31.6KOHM, 1/10W 1 R138 ERJ6ENF3162 M31.6KOHM, 1/10W 1 R139 ERJ6ENF3162 M31.6KOHM, 1/10W 1 R139 ERJ6ENF3102 M 12KOHM,J,1/10W 1 R140-42 ERJ6ENF3103 M 549KOHM, 1/10W 1 R140-42 ERJ6ENF302 M 33KOHM, 1/10W 1 R144 ERJ6ENF6041 M 6.04KOHM, 1/10W 1 R145 ERJ6ENF6041 M 6.04KOHM, 1/10W 1 R146 ERJ6ENF6191 M 6.19KOHM, 1/10W 1 R147 ERJ6GEYJ204 M 200KOHM, 1/10W 1 R148 ERJ6GEYJ393 M 38KOHM, 1/10W 1 R149 ERJ6GEYJ393 M 39KOHM, 1/10W 1 R150,51 ERJ6ENF2493 M 22 OHM,J, 1/10W 2 R203,04 ERJ12YJ220 M 22 OHM,J, 1/2W 2 R203,04 ERJ12YJ263 M 68KOHM, 1/2W 3 R208,09 ERJ6GEYJ103 M 10KOHM,J,1/10W 2			· · ·		
R118 ERJ6GEYJ103 M 10KOHM,J,1/10W 1 R119 ERJ6GEYJ101 M 100 OHM,J,1/10W 1 R120 ERJ12YJ470 M 47 OHM, J,1/10W 1 R122 ERJ6GEYJ154 M 150KOHM,J,1/10W 1 R123 ERJ6GEYJ103 M 10KOHM,J,1/10W 1 R125 ERJ12YJ470 M 47 OHM, J,1/10W 1 R127-29 ERJ6GEYJ183 M 18KOHM,J,1/10W 3 R130 ERJ6GEYJ104 M 100KOHM,J,1/10W 1 R131 ER0S2CKF4993 M 499KOHM, F,1/4W 1 R132,33 ERJ6ENF2493 M 249KOHM, 1/10W 2 R134 ERJ6GEYJ470 M 47 OHM,J,1/10W 1 R135 ERJ6GEYJ103 M 10KOHM,J,1/10W 1 R136 ERJ6GEYJ103 M 10KOHM,J,1/10W 1 R137 ERJ6GEYJ103 M 10KOHM,J,1/10W 1 R138 ERJ6GEYJ123 M 12KOHM,J,1/10W 1 R139 ERJ6GEYJ123 M 12KOHM,J,1/10W 1 R139 ERJ6ENF302 M 33KOHM,J/1/10W 1 R140-42 ERJ6ENF302 M 33KOHM,J/1/10W 1 R141 ERJ6ENF6493 M 549KOHM,J/1/10W 1 R142 ERJ6ENF6491 M6.04KOHM,J/1/10W 1 R143 ERJ6ENF6493 M 549KOHM,J/1/10W 1 R144 ERJ6ENF6191 M6.19KOHM,J/1/10W 1 R145 ERJ6ENF6191 M6.19KOHM,J/1/10W 1 R146 ERJ6EYJ204 M 200KOHM,J/1/10W 1 R147 ERJ6GEYJ393 M 39KOHM,J/1/10W 1 R149 ERJ6GEYJ393 M 39KOHM,J/1/10W 1 R140 ERJ6ENF6493 M 200KOHM,J/1/10W 1 R141 ERJ6EYJ393 M 39KOHM,J/1/10W 1 R142 ERJ6EYJ393 M 39KOHM,J/1/10W 1 R143 ERJ6GEYJ393 M 39KOHM,J/1/10W 1 R144 ERJ6EYJ393 M 39KOHM,J/1/10W 1 R145 ERJ6GEYJ393 M 39KOHM,J/1/10W 1 R146 ERJ6GEYJ393 M 39KOHM,J/1/10W 1 R147 ERJ6GEYJ393 M 39KOHM,J/1/10W 1 R149 ERJ6GEYJ393 M 39KOHM,J/1/10W 1 R140 ERJ6ENF6493 M 220 OHM,J/1/10W 1 R150,51 ERJ6ENF6493 M 220 OHM,J/1/10W 2 R201,02 ERJ12YJ221U M 220 OHM,J/1/2W 2 R203,04 ERJ12YJ220 M 22 OHM,J/1/2W 2 R203,04 ERJ12YJ220 M 22 OHM,J/1/10W 3 R208,09 ERJ6EYJ103 M 10KOHM,J/1/10W 2					
R119 ERJ6GEYJ101 M 100 OHM,J,1/10W 1 R120 ERJ12YJ470 M 47 OHM, J,1/2W 1 R122 ERJ6GEYJ154 M 150KOHM,J,1/10W 1 R123 ERJ6GEYJ103 M 10KOHM,J,1/10W 1 R125 ERJ12YJ470 M 47 OHM, J,1/2W 1 R126 ERJ12YJ470 M 47 OHM, J,1/2W 1 R127-29 ERJ6GEYJ183 M 18KOHM,J,1/10W 3 R130 ERJ6GEYJ104 M 100KOHM,J,1/10W 1 R131 ER0S2CKF4993 M 499KOHM, F,1/4W 1 R132,33 ERJ6ENF2493 M 249KOHM, 1/10W 2 R134 ERJ6GEYJ470 M 47 OHM,J,1/10W 1 R135 ERJ6GEYJ103 M 10KOHM,J,1/10W 1 R136 ERJ6GEYJ103 M 10KOHM,J,1/10W 1 R137 ERJ6GEYJ103 M 10KOHM,J,1/10W 1 R138 ERJ6GEYJ123 M 12KOHM,J/1/10W 1 R138 ERJ6GEYJ474 M 470KOHM,J,1/10W 1 R139 ERJ6ENF3162 M31,6KOHM, 1/10W 1 R140-42 ERJ6ENF302 M 33KOHM, 1/10W 1 R140-42 ERJ6ENF302 M 33KOHM, 1/10W 1 R140-42 ERJ6ENF6041 M6.04KOHM,J,1/10W 1 R144 ERJ6ENF6191 M6.19KOHM, 1/10W 1 R145 ERJ6EYJ204 M 200KOHM,J,1/10W 1 R146 ERJ6GEYJ393 M 39KOHM,J,1/10W 1 R147 ERJ6GEYJ393 M 39KOHM,J,1/10W 1 R149 ERJ6GEYJ393 M 39KOHM,J,1/10W 2 R203,04 ERJ12YJ221U M 220 OHM,J,1/12W 2 R203,04 ERJ12YJ221U M 220 OHM,J,1/10W 3 R208,09 ERJ6GEYJ103 M 10KOHM,J,1/10W 3					
R120 ERJ12YJ470 M 47 OHM, J,1/2W 1 R122 ERJ6GEYJ154 M 150KOHM,J,1/10W 1 R123 ERJ6GEYJ103 M 10KOHM,J,1/10W 1 R125 ERJ12YJ470 M 47 OHM, J,1/2W 1 R127-29 ERJ6GEYJ183 M 18KOHM,J,1/10W 3 R130 ERJ6GEYJ104 M 10KOHM,J,1/10W 1 R131 ER0S2CKF4993 M 499KOHM, F,1/4W 1 R132,33 ERJ6ENF2493 M 249KOHM, F,1/4W 1 R134 ERJ6GEYJ103 M 10KOHM,J,1/10W 1 R135 ERJ6GEYJ103 M 10KOHM,J,1/10W 1 R136 ERJ6ENF3162 M31.6KOHM, I/10W 1 R137 ERJ6GEYJ123 M 12KOHM,J,1/10W 1 R138 ERJ6EYJ23 M 12KOHM,J,1/10W 1 R139 ERJ6ENF3302 M 33KOHM, 1/10W 1 R140-42 ERJ6ENF3302 M 33KOHM, 1/10W 1 R140-42 ERJ6ENF643 M 549KOHM,J,1/10W 1 R144 ERJ6ENF6191 M6.19KOHM, I/10W 1 R145 ERJ6ENF6041 M6.04KOHM, I/10W 1 R146 ERJ6EYJ204 M 200KOHM,J,1/10W 1 R147 ERJ6GEYJ393 M 39KOHM,J/1/10W 1 R149 ERJ6EYJ393 M 39KOHM,J/1/10W 1 R150,51 ERJ6ENF2493 M 249KOHM, J/1/10W 2 R203,04 ERJ12YJ221U M 220 CHM,J, J/2W 2 R203,04 ERJ12YJ220 M 22 OHM,J, J/2W 2 R205-07 ERJ12YJ683 M 68KOHM, J/1/10W 3 R208,09 ERJ6GEYJ103 M 10KOHM,J/1/10W 2					
R122 ERJ6GEYJ154 M 150KOHM,J,1/10W 1 R123 ERJ6GEYJ103 M 10KOHM,J,1/10W 1 R125 ERJ12YJ470 M 47 OHM, J,1/2W 1 R127-29 ERJ6GEYJ183 M 18KOHM,J,1/10W 3 R130 ERJ6GEYJ104 M 100KOHM,J,1/10W 1 R131 ER0S2CKF4993 M 499KOHM, F,1/4W 1 R132,33 ERJ6ENF2493 M 249KOHM, 1/10W 2 R134 ERJ6GEYJ470 M 47 OHM,J,1/10W 1 R135 ERJ6GEYJ103 M 10KOHM,J,1/10W 1 R136 ERJ6GEYJ103 M 10KOHM,J,1/10W 1 R137 ERJ6GEYJ123 M 12KOHM,J,1/10W 1 R138 ERJ6GEYJ23 M 12KOHM,J,1/10W 1 R139 ERJ6GEYJ474 M 470KOHM,J,1/10W 1 R140-42 ERJ6ENF5493 M 549KOHM, 1/10W 1 R144 ERJ6ENF6191 M6.19KOHM, 1/10W 1 R145 ERJ6GEYJ204 M 100,04KOHM, 1/10W 1 R146 ERJ6ENF6191 M6.19KOHM, 1/10W 1 R147 ERJ6GEYJ393 M 39KOHM, 1/10W 1 R148 ERJ6GEYJ393 M 39KOHM, 1/10W 1 R149 ERJ6GEYJ393 M 39KOHM, 1/10W 1 R140-1 ERJ6GEYJ393 M 39KOHM, 1/10W 1 R141 ERJ6GEYJ393 M 39KOHM, 1/10W 1 R142 ERJ6GEYJ393 M 39KOHM, 1/10W 1 R144 ERJ6GEYJ393 M 39KOHM,J,1/10W 1 R145 ERJ6GEYJ393 M 39KOHM,J,1/10W 1 R147 ERJ6GEYJ393 M 39KOHM,J,1/10W 1 R149 ERJ6GEYJ393 M 39KOHM,J,1/10W 1					
R123 ERJ6GEYJ103 M 10KOHM,J,1/10W 1 R125 ERJ12YJ470 M 47 OHM, J,1/2W 1 R127-29 ERJ6GEYJ183 M 18KOHM,J,1/10W 3 R130 ERJ6GEYJ104 M 100KOHM,J,1/10W 1 R131 ER0S2CKF4993 M 499KOHM, F,1/4W 1 R132,33 ERJ6ENF2493 M 249KOHM, 1/10W 2 R134 ERJ6GEYJ470 M 47 OHM,J,1/10W 1 R135 ERJ6GEYJ103 M 10KOHM,J,1/10W 1 R136 ERJ6GEYJ103 M 10KOHM,J,1/10W 1 R137 ERJ6GEYJ123 M 12KOHM, 1/10W 1 R138 ERJ6GEYJ123 M 12KOHM,J,1/10W 1 R139 ERJ6GEYJ474 M 470KOHM,J,1/10W 1 R140-42 ERJ6ENF3102 M 33KOHM, 1/10W 1 R140-42 ERJ6ENF5493 M 549KOHM, 1/10W 3 R1441 ERJ6ENF6041 M6.04KOHM, 1/10W 1 R144 ERJ6ENF6191 M6.19KOHM, 1/10W 1 R145 ERJ6GEYJ204 M 200KOHM,J,1/10W 1 R146 ERJ6GEYJ393 M 39KOHM,J,1/10W 1 R147 ERJ6GEYJ393 M 39KOHM,J,1/10W 1 R149 ERJ6GEYJ221U M 220KOHM,J,1/10W 2 R201,02 ERJ12YJ221U M 22 OHM,J, 1/2W 2 R203,04 ERJ12YJ220 M 22 OHM,J, 1/2W 2 R203,04 ERJ12YJ220 M 22 OHM,J, 1/2W 3 R208,09 ERJ6GEYJ103 M 10KOHM,J,1/10W 2					
R125 ERJ12YJ470 M 47 OHM, J,1/2W 1 R127-29 ERJ6GEYJ183 M 18KOHM,J,1/10W 3 R130 ERJ6GEYJ104 M 100KOHM,J,1/10W 1 R131 ER0S2CKF4993 M 499KOHM, F,1/4W 1 R132,33 ERJ6ENF2493 M 249KOHM, 1/10W 2 R134 ERJ6GEYJ470 M 47 OHM,J,1/10W 1 R135 ERJ6GEYJ103 M 10KOHM,J,1/10W 1 R136 ERJ6GEYJ103 M 10KOHM,J,1/10W 1 R137 ERJ6GEYJ123 M 12KOHM, J/10W 1 R138 ERJ6GEYJ474 M 470KOHM,J,1/10W 1 R139 ERJ6ENF3102 M 33KOHM, 1/10W 1 R140-42 ERJ6ENF5493 M 549KOHM, J/10W 1 R1414 ERJ6ENF6041 M6.04KOHM, J/10W 1 R144 ERJ6ENF6191 M6.19KOHM, J/10W 1 R145 ERJ6GEYJ204 M 200KOHM, J/10W 1 R146 ERJ6GEYJ884 M 680KOHM, J/10W 1 R147 ERJ6GEYJ393 M 39KOHM, J/10W 1 R149 ERJ6GEYJ393 M 39KOHM,J,1/10W 1 R149 ERJ6GEYJ221U M 220KOHM,J,1/10W 2 R201,02 ERJ12YJ221U M 22 OHM,J, 1/2W 2 R203,04 ERJ12YJ220 M 22 OHM,J, 1/2W 2 R205-07 ERJ12YJ2683 M 68KOHM,J,1/10W 2					
R127-29 ERJ6GEYJ183 M 18KOHM,J,1/10W 3 R130 ERJ6GEYJ104 M 100KOHM,J,1/10W 1 R131 ER0S2CKF4993 M 499KOHM, F,1/4W 1 R132,33 ERJ6ENF2493 M 249KOHM, 1/10W 2 R134 ERJ6GEYJ470 M 47 OHM,J,1/10W 1 R135 ERJ6GEYJ103 M 10KOHM,J,1/10W 1 R136 ERJ6GEYJ123 M 12KOHM,J,1/10W 1 R137 ERJ6GEYJ123 M 12KOHM,J,1/10W 1 R138 ERJ6GEYJ474 M 470KOHM,J,1/10W 1 R139 ERJ6ENF3302 M 33KOHM, 1/10W 1 R140-42 ERJ6ENF5493 M 549KOHM, 1/10W 1 R143 ERJ6ENF6041 M6.04KOHM, 1/10W 1 R144 ERJ6ENF6191 M6.19KOHM, 1/10W 1 R145 ERJ6GEYJ204 M 200KOHM,J,1/10W 1 R146 ERJ6GEYJ393 M 39KOHM,J,1/10W 1 R147 ERJ6GEYJ393 M 39KOHM,J,1/10W 1 R149 ERJ6GEYJ393 M 39KOHM,J,1/10W 1 R149 ERJ6GEYJ393			· · ·		
R130 ERJGEYJ104 M 100KOHM,J,1/10W 1 R131 ER0S2CKF4993 M 499KOHM, F,1/4W 1 R132,33 ERJGENF2493 M 249KOHM, 1/10W 2 R134 ERJGGEYJ470 M 47 OHM,J,1/10W 1 R135 ERJGGEYJ103 M 10KOHM,J,1/10W 1 R136 ERJGENF3162 M31.6KOHM, 1/10W 1 R137 ERJGGEYJ123 M 12KOHM,J,1/10W 1 R138 ERJGGEYJ474 M 470KOHM,J,1/10W 1 R139 ERJGENF3302 M 33KOHM, 1/10W 1 R140-42 ERJGENF5493 M 549KOHM, 1/10W 3 R144 ERJGENF6041 M6.04KOHM, 1/10W 1 R145 ERJGENF6191 M6.19KOHM, 1/10W 1 R146 ERJGGEYJ204 M 200KOHM,J,1/10W 1 R147 ERJGGEYJ393 M 39KOHM,J,1/10W 1 R149 ERJGGEYJ393 M 39KOHM,J,1/10W 2 R201,02 ERJ12YJ221U M 220 OHM,J, 1/2W 2 R203,04 ERJ12YJ220 M 22 OHM,J, 1/2W 2 R205-07 ERJ12YJ683 M 68KOHM, J/1/10W 3 R208,09 ERJGGEYJ103 M 10KOHM,J,1/10W 2		ERJ12YJ470	M 47 OHM, J,1/2W		
R131 ER0S2CKF4993 M 499KOHM, F,1/4W 1 R132,33 ERJ6ENF2493 M 249KOHM, 1/10W 2 R134 ERJ6GEYJ470 M 47 OHM,J,1/10W 1 R135 ERJ6GEYJ103 M 10KOHM,J,1/10W 1 R136 ERJ6GEYJ103 M 10KOHM,J,1/10W 1 R137 ERJ6GEYJ123 M 12KOHM,J,1/10W 1 R138 ERJ6GEYJ123 M 12KOHM,J,1/10W 1 R139 ERJ6GEYJ474 M 470KOHM,J,1/10W 1 R140-42 ERJ6ENF3302 M 33KOHM, 1/10W 3 R140-42 ERJ6ENF5493 M 549KOHM, 1/10W 3 R144 ERJ6ENF6041 M6.04KOHM, 1/10W 1 R145 ERJ6ENF6191 M6.19KOHM, 1/10W 1 R146 ERJ6GEYJ204 M 200KOHM,J,1/10W 1 R147 ERJ6GEYJ393 M 39KOHM,J,1/10W 1 R149 ERJ6GEYJ393 M 39KOHM,J,1/10W 2 R201,02 ERJ12YJ221U M 220 OHM,J, 1/2W 2 R203,04 ERJ12YJ220 M 22 OHM,J, 1/2W 2 R205-07 ERJ12YJ683 M 68KOHM,J,1/10W 2	_	ERJ6GEYJ183	M 18KOHM,J,1/10W		
R132,33		ERJ6GEYJ104	M 100KOHM,J,1/10W	1	
R134 ERJ6GEYJ470 M 47 OHM,J,1/10W 1 R135 ERJ6GEYJ103 M 10KOHM,J,1/10W 1 R136 ERJ6ENF3162 M31.6KOHM, 1/10W 1 R137 ERJ6GEYJ123 M 12KOHM,J,1/10W 1 R138 ERJ6GEYJ474 M 470KOHM,J,1/10W 1 R139 ERJ6ENF3302 M 33KOHM, 1/10W 1 R140-42 ERJ6ENF5493 M 549KOHM, 1/10W 3 R143 ERJ6ENF6041 M6.04KOHM, 1/10W 1 R144 ERJ6ENF6191 M6.19KOHM, 1/10W 1 R145 ERJ6GEYJ204 M 200KOHM,J,1/10W 1 R146 ERJ6GEYJ393 M 39KOHM,J,1/10W 1 R147 ERJ6GEYJ393 M 39KOHM,J,1/10W 1 R149 ERJ6GEYJ393 M 39KOHM,J,1/10W 1 R150,51 ERJ6ENF2493 M 249KOHM, 1/10W 2 R201,02 ERJ12YJ221U M 220 OHM,J, 1/2W 2 R203,04 ERJ12YJ220 M 22 OHM,J, 1/2W 2 R205-07 ERJ12YJ683 M 68KOHM,J,1/10W 3 R208,09 ERJ6GEYJ103 M 10KOHM,J,1/10W 2	R131	ER0S2CKF4993	M 499KOHM, F,1/4W	1	
R135 ERJ6GEYJ103 M 10KOHM,J,1/10W 1 R136 ERJ6ENF3162 M31.6KOHM, 1/10W 1 R137 ERJ6GEYJ123 M 12KOHM,J,1/10W 1 R138 ERJ6GEYJ474 M 470KOHM,J,1/10W 1 R139 ERJ6ENF3302 M 33KOHM, 1/10W 1 R140-42 ERJ6ENF5493 M 549KOHM, 1/10W 3 R143 ERJ6ENF6041 M6.04KOHM, 1/10W 1 R144 ERJ6ENF6191 M6.19KOHM, 1/10W 1 R145 ERJ6GEYJ204 M 200KOHM,J,1/10W 1 R146 ERJ6GEYJ893 M 39KOHM,J,1/10W 1 R147 ERJ6GEYJ893 M 39KOHM,J,1/10W 1 R149 ERJ6GEYJ393 M 39KOHM,J,1/10W 1 R150,51 ERJ6ENF2493 M 249KOHM, 1/10W 2 R201,02 ERJ12YJ221U M 220 OHM,J, 1/2W 2 R203,04 ERJ12YJ220 M 22 OHM,J, 1/2W 2 R205-07 ERJ12YJ683 M 68KOHM, 1/2W 3 R208,09 ERJ6GEYJ103 M 10KOHM,J,1/10W 2	R132,33	ERJ6ENF2493	M 249KOHM, 1/10W	2	
R136 ERJ6ENF3162 M31.6KOHM, 1/10W 1 R137 ERJ6GEYJ123 M 12KOHM,J,1/10W 1 R138 ERJ6GEYJ474 M 470KOHM,J,1/10W 1 R139 ERJ6ENF3302 M 33KOHM, 1/10W 1 R140-42 ERJ6ENF5493 M 549KOHM, 1/10W 3 R143 ERJ6ENF6041 M6.04KOHM, 1/10W 1 R144 ERJ6ENF6191 M6.19KOHM, 1/10W 1 R145 ERJ6GEYJ204 M 200KOHM,J,1/10W 1 R146 ERJ6GEYJ303 M 39KOHM,J,1/10W 1 R147 ERJ6GEYJ393 M 39KOHM,J,1/10W 1 R149 ERJ6GEYJ393 M 39KOHM,J,1/10W 1 R149 ERJ6GEYJ393 M 39KOHM,J,1/10W 1 R150,51 ERJ6ENF2493 M 249KOHM, 1/10W 2 R201,02 ERJ12YJ221U M 220 OHM,J, 1/2W 2 R203,04 ERJ12YJ220 M 22 OHM,J, 1/2W 2 R205-07 ERJ12YJ683 M 68KOHM, 1/2W 3 R208,09 ERJ6GEYJ103 M 10KOHM,J,1/10W 2	R134	ERJ6GEYJ470	M 47 OHM,J,1/10W	1	
R137 ERJ6GEYJ123 M 12KOHM,J,1/10W 1 R138 ERJ6GEYJ474 M 470KOHM,J,1/10W 1 R139 ERJ6ENF3302 M 33KOHM, 1/10W 1 R140-42 ERJ6ENF5493 M 549KOHM, 1/10W 3 R143 ERJ6ENF6041 M6.04KOHM, 1/10W 1 R144 ERJ6ENF6191 M6.19KOHM, 1/10W 1 R145 ERJ6GEYJ204 M 200KOHM,J,1/10W 1 R146 ERJ6GEYJ684 M 680KOHM,J,1/10W 1 R147 ERJ6GEYJ393 M 39KOHM,J,1/10W 1 R149 ERJ6GEYJ393 M 39KOHM,J,1/10W 1 R150,51 ERJ6ENF2493 M 249KOHM, 1/10W 2 R201,02 ERJ12YJ221U M 220 OHM,J, 1/2W 2 R203,04 ERJ12YJ220 M 22 OHM,J, 1/2W 2 R205-07 ERJ12YJ683 M 68KOHM, J,1/10W 2 R208,09 ERJ6GEYJ103 M 10KOHM,J,1/10W 2	R135	ERJ6GEYJ103	M 10KOHM,J,1/10W	1	
R138 ERJ6GEYJ474 M 470KOHM,J,1/10W 1 R139 ERJ6ENF3302 M 33KOHM, 1/10W 1 R140-42 ERJ6ENF5493 M 549KOHM, 1/10W 3 R143 ERJ6ENF6041 M6.04KOHM, 1/10W 1 R144 ERJ6ENF6191 M6.19KOHM, 1/10W 1 R145 ERJ6GEYJ204 M 200KOHM,J,1/10W 1 R146 ERJ6GEYJ884 M 680KOHM,J,1/10W 1 R147 ERJ6GEYJ393 M 39KOHM,J,1/10W 1 R149 ERJ6GEYJ393 M 39KOHM,J,1/10W 1 R150,51 ERJ6ENF2493 M 249KOHM, 1/10W 2 R201,02 ERJ12YJ221U M 220 OHM,J, 1/2W 2 R203,04 ERJ12YJ220 M 22 OHM,J, 1/2W 2 R205-07 ERJ12YJ683 M 68KOHM, 1/10W 2 R208,09 ERJ6GEYJ103 M 10KOHM,J,1/10W 2	R136	ERJ6ENF3162	M31.6KOHM, 1/10W	1	
R139 ERJ6ENF3302 M 33KOHM, 1/10W 1 R140-42 ERJ6ENF5493 M 549KOHM, 1/10W 3 R143 ERJ6ENF6041 M6.04KOHM, 1/10W 1 R144 ERJ6ENF6191 M6.19KOHM, 1/10W 1 R145 ERJ6GEYJ204 M 200KOHM,J,1/10W 1 R146 ERJ6GEYJ684 M 680KOHM,J,1/10W 1 R147 ERJ6GEYJ393 M 39KOHM,J,1/10W 1 R149 ERJ6GEYJ393 M 39KOHM,J,1/10W 1 R150,51 ERJ6ENF2493 M 249KOHM, 1/10W 2 R201,02 ERJ12YJ221U M 220 OHM,J, 1/2W 2 R203,04 ERJ12YJ220 M 22 OHM,J, 1/2W 2 R205-07 ERJ12YJ683 M 68KOHM, 1/2W 3 R208,09 ERJ6GEYJ103 M 10KOHM,J,1/10W 2	R137	ERJ6GEYJ123	M 12KOHM,J,1/10W	1	
R140-42 ERJ6ENF5493 M 549KOHM, 1/10W 3 R143 ERJ6ENF6041 M6.04KOHM, 1/10W 1 R144 ERJ6ENF6191 M6.19KOHM, 1/10W 1 R145 ERJ6GEYJ204 M 200KOHM,J,1/10W 1 R146 ERJ6GEYJ684 M 680KOHM,J,1/10W 1 R147 ERJ6GEYJ393 M 39KOHM,J,1/10W 1 R149 ERJ6GEYJ393 M 39KOHM,J,1/10W 1 R150,51 ERJ6ENF2493 M 249KOHM, 1/10W 2 R201,02 ERJ12YJ221U M 220 OHM,J, 1/2W 2 R203,04 ERJ12YJ220 M 22 OHM,J, 1/2W 2 R205-07 ERJ12YJ683 M 68KOHM, 1/2W 3 R208,09 ERJ6GEYJ103 M 10KOHM,J,1/10W 2	R138	ERJ6GEYJ474	M 470KOHM,J,1/10W	1	
R143 ERJ6ENF6041 M6.04KOHM, 1/10W 1 R144 ERJ6ENF6191 M6.19KOHM, 1/10W 1 R145 ERJ6GEYJ204 M 200KOHM,J,1/10W 1 R146 ERJ6GEYJ684 M 680KOHM,J,1/10W 1 R147 ERJ6GEYJ393 M 39KOHM,J,1/10W 1 R149 ERJ6GEYJ393 M 39KOHM,J,1/10W 1 R150,51 ERJ6ENF2493 M 249KOHM, 1/10W 2 R201,02 ERJ12YJ221U M 220 OHM,J, 1/2W 2 R203,04 ERJ12YJ220 M 22 OHM,J, 1/2W 2 R205-07 ERJ12YJ683 M 68KOHM, 1/2W 3 R208,09 ERJ6GEYJ103 M 10KOHM,J,1/10W 2	R139	ERJ6ENF3302	M 33KOHM, 1/10W	1	
R144 ERJ6ENF6191 M6.19KOHM, 1/10W 1 R145 ERJ6GEYJ204 M 200KOHM,J,1/10W 1 R146 ERJ6GEYJ684 M 680KOHM,J,1/10W 1 R147 ERJ6GEYJ393 M 39KOHM,J,1/10W 1 R149 ERJ6GEYJ393 M 39KOHM,J,1/10W 1 R150,51 ERJ6ENF2493 M 249KOHM, 1/10W 2 R201,02 ERJ12YJ221U M 220 OHM,J, 1/2W 2 R203,04 ERJ12YJ220 M 22 OHM,J, 1/2W 2 R205-07 ERJ12YJ683 M 68KOHM, 1/2W 3 R208,09 ERJ6GEYJ103 M 10KOHM,J,1/10W 2	R140-42	ERJ6ENF5493	M 549KOHM, 1/10W	3	
R145 ERJ6GEYJ204 M 200KOHM,J,1/10W 1 R146 ERJ6GEYJ684 M 680KOHM,J,1/10W 1 R147 ERJ6GEYJ393 M 39KOHM,J,1/10W 1 R149 ERJ6GEYJ393 M 39KOHM,J,1/10W 1 R150,51 ERJ6ENF2493 M 249KOHM, 1/10W 2 R201,02 ERJ12YJ221U M 220 OHM,J, 1/2W 2 R203,04 ERJ12YJ220 M 22 OHM,J, 1/2W 2 R205-07 ERJ12YJ683 M 68KOHM, 1/2W 3 R208,09 ERJ6GEYJ103 M 10KOHM,J,1/10W 2	R143	ERJ6ENF6041	M6.04KOHM, 1/10W	1	
R146 ERJ6GEYJ684 M 680KOHM,J,1/10W 1 R147 ERJ6GEYJ393 M 39KOHM,J,1/10W 1 R149 ERJ6GEYJ393 M 39KOHM,J,1/10W 1 R150,51 ERJ6ENF2493 M 249KOHM, 1/10W 2 R201,02 ERJ12YJ221U M 220 OHM,J, 1/2W 2 R203,04 ERJ12YJ220 M 22 OHM,J, 1/2W 2 R205-07 ERJ12YJ683 M 68KOHM, 1/2W 3 R208,09 ERJ6GEYJ103 M 10KOHM,J,1/10W 2	R144	ERJ6ENF6191	M6.19KOHM, 1/10W	1	
R147 ERJ6GEYJ393 M 39KOHM,J,1/10W 1 R149 ERJ6GEYJ393 M 39KOHM,J,1/10W 1 R150,51 ERJ6ENF2493 M 249KOHM, 1/10W 2 R201,02 ERJ12YJ221U M 220 OHM,J, 1/2W 2 R203,04 ERJ12YJ220 M 22 OHM,J, 1/2W 2 R205-07 ERJ12YJ683 M 68KOHM, 1/2W 3 R208,09 ERJ6GEYJ103 M 10KOHM,J,1/10W 2	R145	ERJ6GEYJ204	M 200KOHM,J,1/10W	1	
R149 ERJ6GEYJ393 M 39KOHM,J,1/10W 1 R150,51 ERJ6ENF2493 M 249KOHM, 1/10W 2 R201,02 ERJ12YJ221U M 220 OHM,J, 1/2W 2 R203,04 ERJ12YJ220 M 22 OHM,J, 1/2W 2 R205-07 ERJ12YJ683 M 68KOHM, 1/2W 3 R208,09 ERJ6GEYJ103 M 10KOHM,J,1/10W 2	R146	ERJ6GEYJ684	M 680KOHM,J,1/10W	1	
R150,51 ERJ6ENF2493 M 249KOHM, 1/10W 2 R201,02 ERJ12YJ221U M 220 OHM,J, 1/2W 2 R203,04 ERJ12YJ220 M 22 OHM,J, 1/2W 2 R205-07 ERJ12YJ683 M 68KOHM, 1/2W 3 R208,09 ERJ6GEYJ103 M 10KOHM,J,1/10W 2	R147	ERJ6GEYJ393	M 39KOHM,J,1/10W	1	
R201,02 ERJ12YJ221U M 220 OHM,J, 1/2W 2 R203,04 ERJ12YJ220 M 22 OHM,J, 1/2W 2 R205-07 ERJ12YJ683 M 68KOHM, 1/2W 3 R208,09 ERJ6GEYJ103 M 10KOHM,J,1/10W 2	R149	ERJ6GEYJ393	M 39KOHM,J,1/10W	1	
R203,04 ERJ12YJ220 M 22 OHM,J, 1/2W 2 R205-07 ERJ12YJ683 M 68KOHM, 1/2W 3 R208,09 ERJ6GEYJ103 M 10KOHM,J,1/10W 2	R150,51	ERJ6ENF2493	M 249KOHM, 1/10W	2	
R205-07 ERJ12YJ683 M 68KOHM, 1/2W 3 R208,09 ERJ6GEYJ103 M 10KOHM,J,1/10W 2	R201,02	ERJ12YJ221U	M 220 OHM,J, 1/2W	2	
R208,09 ERJ6GEYJ103 M 10KOHM,J,1/10W 2	R203,04	ERJ12YJ220	M 22 OHM,J, 1/2W	2	
	R205-07	ERJ12YJ683	M 68KOHM, 1/2W	3	
R210 ERX12SJ1R0 M 0.1 OHM, J,1/2W 1	R208,09	ERJ6GEYJ103	M 10KOHM,J,1/10W	2	
	R210	ERX12SJ1R0	M 0.1 OHM, J,1/2W	1	

Ref. No.	Part No.	Part Name & Description	Pcs	Remarks
R251,52	ERG2SJ183H	M 18KOHM, J, 2W	2	
R253-55	ERJ6GEYJ114	M 110KOHM,J,1/10W	3	
R256,57	ERJ6GEYJ682	M 6.8KOHM,J,1/10W	2	
R258-61	ERJ6ENF6192	M61.9KOHM, 1/10W	4	
R262	ERJ6GEYJ220	M 22 OHM,J,1/10W	1	
R301,02	ERJ12YJ101	M 100 OHM,J, 1/2W	2	
R303,04	ERJ12YJ220	M 22 OHM,J, 1/2W	2	
R305-07	ERJ12YJ683	M 68KOHM,J, 1/2W	3	
R308,09	ERJ6GEYJ103	M 10KOHM,J,1/10W	2	
R310	ERX12SJ1R0	M 0.1 OHM, J,1/2W	1	
R351	ERJ6GEYJ103	M 10KOHM,J,1/10W	1	
R353	ERJ6GEYJ223	M 22KOHM,J,1/10W	1	
R354	ERJ6GEYJ101	M 100 OHM,J,1/10W	1	
R356,57	ERJ6GEYJ103	M 10KOHM,J,1/10W	2	
R358	ERJ6GEYJ222	M 2.2KOHM,J,1/10W	1	
R359,60	ERJ6GEYJ223	M 22KOHM,J,1/10W	2	
R361	ERJ6GEYJ103	M 10KOHM,J,1/10W	1	
R362	ERDS2TJ101	C 100 OHM, J,1/4W	1	
R363	ERJ6GEYJ332	M 3.3KOHM,J,1/10W	1	
R364	ERJ6GEYJ101	M 100 OHM,J,1/10W	1	
R365-67	ERJ6GEYJ223	M 22KOHM,J,1/10W	3	
R368	ERJ6GEYJ101	M 100 OHM,J,1/10W	1	
R369,70	ERJ6GEYJ222	M 2.2KOHM,J,1/10W	2	
R371	ERJ6ENF1622	M16.2KOHM, 1/10W	1	
R372	ERJ6GEYJ1R0	M 1 OHM,J,1/10W	1	
R373	ERDS2TJ471	C 470 OHM, J,1/4W	1	
R401	ERJ12YJ100	M 10 OHM,J, 1/2W	1	
R402,03	ERJ12YJ104U	M 100KOHM, 1/2W	2	
R404	ERJ6GEYJ103	M 10KOHM, J,1/10W	1	
R405,06	ERJ6GEYJ184	M 180KOHM,J,1/10W	2	
R407	ERJ6GEYJ103	M 10KOHM,J,1/10W	1	
R408	ERJ6GEYJ102	M 1KOHM,J,1/10W	1	
R409	ERG2SJ682	M 6.8KOHM, J, 2W	1	
R410	ERJ6GEYJ472	M 4.7KOHM,J,1/10W	1	
R412	ERJ6GEYJ104	M 100KOHM,J,1/10W	1	
R413	ERJ6GEYJ473	M 47KOHM,J,1/10W	1	
R414-17	ERJ6GEYJ123	M 12KOHM,J,1/10W	4	
R414-17	ERJ6GEYJ332	M 3.3KOHM,J,1/10W	1	
		* * * * * * * * * * * * * * * * * * * *		
R420	ERJ6GEYJ101	M 100 OHM,J,1/10W	1	
R421	ERJ6ENF4751	M4.75KOHM, 1/10W	1	
R422	ERJ6ENF1581	M1.58KOHM, 1/10W	1	
R423,24	ERJ6ENF7152	M71.5KOHM, 1/10W	2	
R425	ERJ6ENF3002	M 30KOHM, 1/10W	1	
R426	RF2EJR47B	W0.47 OHM, J, 2W	1	
R428	ERJ6ENF6342	M6.34KOHM, 1/10W	1	
R429	ERJ6ENF5362	M5.36KOHM, 1/10W	1	
R430	ERJ6GEYJ103	M 10KOHM, J, 1/10W	1	
R474	ERJ6ENF1052	M10.5KOHM, 1/10W	1	
R477-80	ERJ6ENF1052	M10.5KOHM, 1/10W	4	
R501	ERJ12YJ474	M 470KOHM, 1/2W	1	
R503	ERJ12YJ474	M 470KOHM, 1/2W	1	
R505	ERJ6GEYJ334	M 330KOHM,J,1/10W	1	
R507,08	ERJ6GEYJ334	M 330KOHM,J,1/10W	2	
R509-12	ERJ6ENF8253	M 825KOHM, 1/10W	4	

Ref. No.	Part No.	Part Name & Description	Pcs	Remarks
R514,15	ERJ6ENF8253	M 825KOHM, 1/10W	2	
R518	ERJ12YJ100	M 10 OHM,J, 1/2W	1	
R519	ERJ6GEYJ103	M 10KOHM,J,1/10W	1	
R528,29	ERJ6ENF2703	M 270KOHM, 1/10W	2	
R530	ER0S2TKF5363	M 536KOHM, F,1/4W	1	
R531	ERJ6GEYJ4R7	M 4.7 OHM,J,1/10W	1	
R560	ERJ6GEYJ473	M 47KOHM,J,1/10W	1	
R561	ERDS2TJ332	C 3.3KOHM, J,1/4W	1	
R563	ERJ6GEYJ332	M 3.3KOHM,J,1/10W	1	
R564	ERJ6GEYJ391	M 390 OHM,J,1/10W	1	
R565	ERJ6GEYJ473	M 47KOHM,J,1/10W	1	
R566	ERJ6GEYJ222	M 2.2KOHM,J,1/10W	1	
R567	ERJ6GEYJ103	M 10KOHM,J,1/10W	1	
R568	ERJ6GEYJ102	M 1KOHM,J,1/10W	1	
R569,70	ERJ12YJ151	M 150 OHM,J, 1/2W	2	
R571	ERJ6GEYJ332	M 3.3KOHM,J,1/10W	1	
R572,73	ERJ6ENF2703	M 270KOHM, 1/10W	2	
R574	ER0S2TKF5363	M 536KOHM, F,1/4W	1	
R580	ERJ6GEYJ102	M 1KOHM,J,1/10W	1	
RF101	A5MC100JP2	139C 10	1	Δ
T201	ETB57LZ156AD	TRANS	1	Δ.
T301	ETB50LZ116AD	TRANS	1	<u>A</u>
T501	ETB25KA1C6AD	TRANS	1	<u>A</u>
1301	LIBZORATOGAD	ITANO	<u> </u>	<u>117</u>
VR251	EVMEASA01B54	VARIABLE RESISTOR	1	
VR351	EVMEASA01B14	VARIABLE RESISTOR	1	
VR401	EVMEASA01B34	VARIABLE RESISTOR	1	
Z101	TND14V751	VARISTOR	1	⚠
Z102	ERZVGAD471	VARISTOR	1	Δ
Z501	ERZVGAD471	VARISTOR	1	Δ
7D101	MA9054	ZENED DIODE	4	
ZD101	MA8051	ZENER DIODE	1	
ZD351-54	MA8150	ZENER DIODE	4	
ZD405,06	MA4300N	ZENER DIODE	2	
ZD407	MA4120N	ZENER DIODE	1	
ZD408	MA8220	ZENER DIODE	1	
ZD501	MA8270	ZENER DIODE	1	
ZD502	MA4300N	ZENER DIODE	1	

17. Schematic Diagram for printing with A4

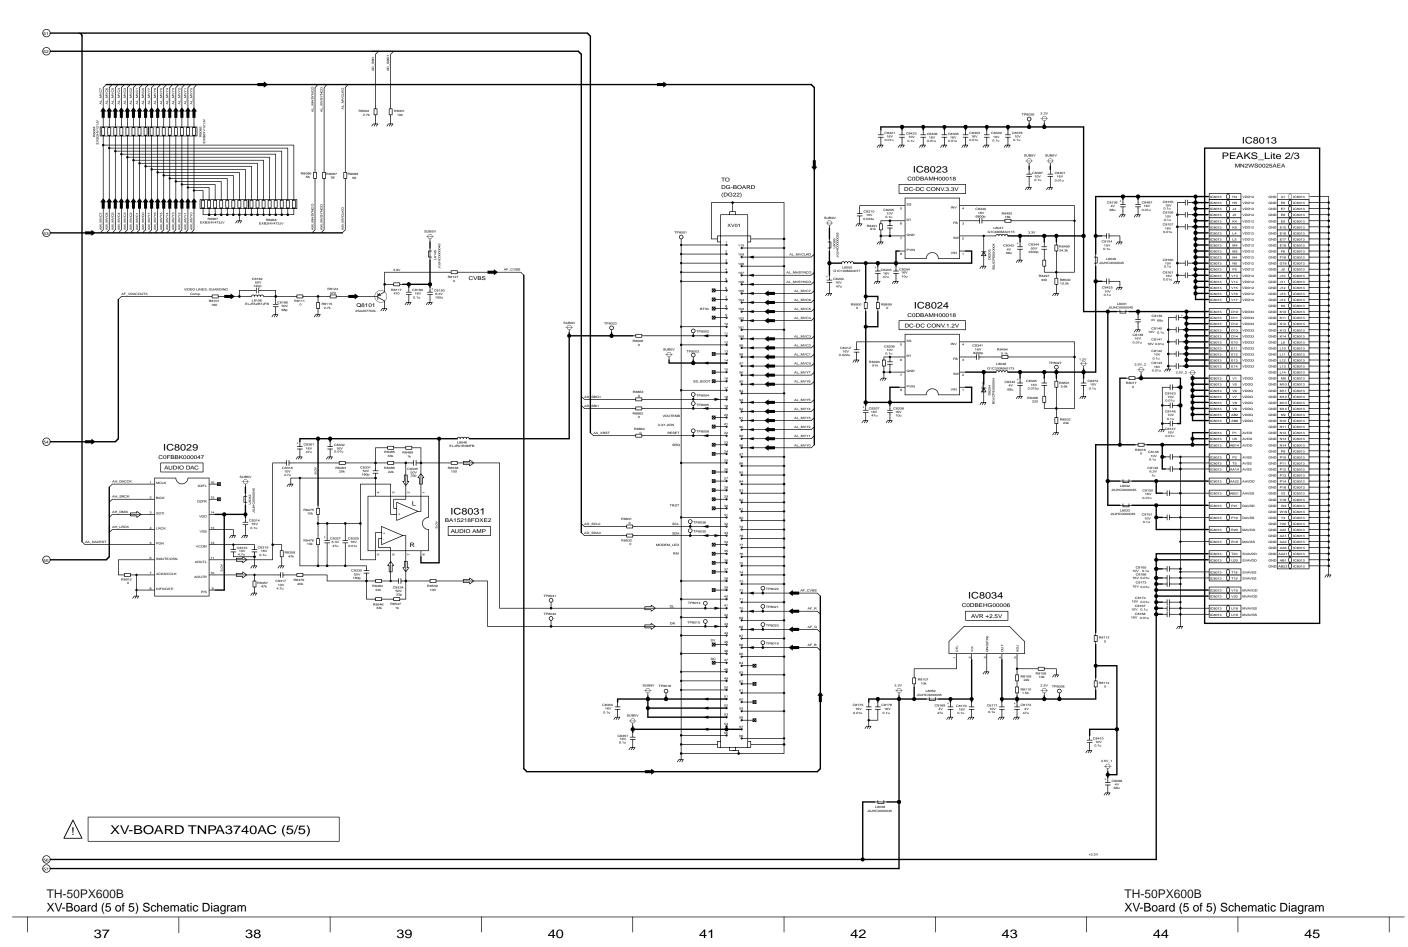

14 Schematic and Block Diagram

14.1. Schematic Diagram Notes

Important Safety Notice

Components identified by \triangle mark have special characteristics important for safety. When replacing any of these components, use only manufacture's specified parts.

Notes:

1. Resistor

Unit of resistance is OHM [Ω] (K=1,000, M=1,000,000).

2. Capacitor

Unit of capacitance is µF, unless otherwise noted.

Co

Unit of inductance is H, unless otherwise noted.

4. Test Point

○ : Test Point position

5. Earth Symbol

6. Voltage Measurement

Voltage is measured by a DC voltmeter.

Conditions of the measurement are the following:

Power Source AC220-240V, 50/60Hz
Receiving Signal Colour Bar signal (RF)
All customer's controls Maximum positions

- 7. When arrow mark (\nearrow) is found, connection is easily found from the direction of arrow.
- 8. Indicates the major signal flow.

: Video →

Audio ⇒

9. This schematic diagram is the latest at the time of printing and subject to change without notice.

Remarks:

1. The Power Circuit contains a circuit area which uses a separate power supply to isolate the earth connection.


The circuit is defined by HOT and COLD indications in the schematic diagram. Take the follwing precautions.

All circuits, except the Power Circuit, are cold.


Precautions

- a. Do not touch the hot part or the hot and cold parts at the same time or you may be shocked.
- b. Do not short- circuit the hot and cold circuits or a fuse may blow and parts may break.
- c. Do not connect an instrument, such as an oscilloscope, to the hot and cold circuits simultaneously or a fuse may blow.
 Connect the earth of instruments to the earth connection of the circuit being measured.
- d. Make sure to disconnect the power plug before removing the chassis.

14.2. Main Block Diagram

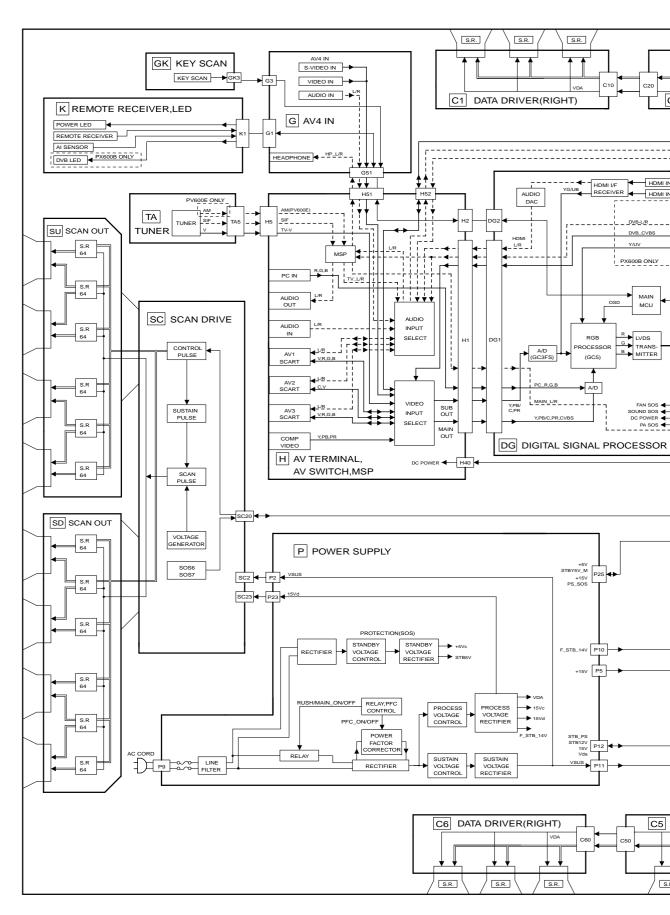


TH-50PV600E, TH-50PX600B Main Block Diagram

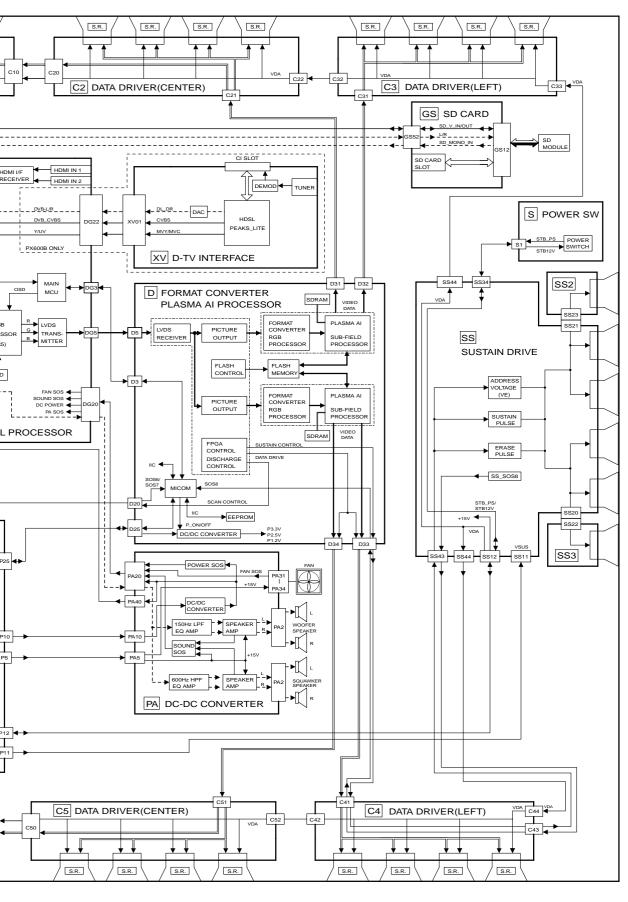


TH-50PV600E, TH-50PX600B Main Block Diagram

14.3. P-Board Block Diagram

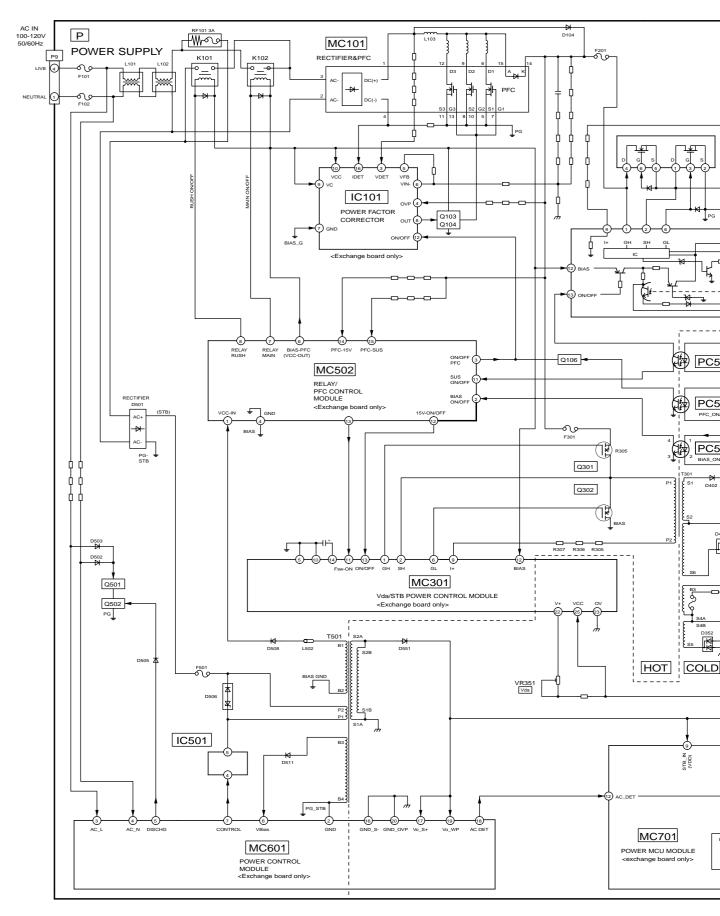



TH-50PV600E, TH-50PX600B P-Board Block Diagram

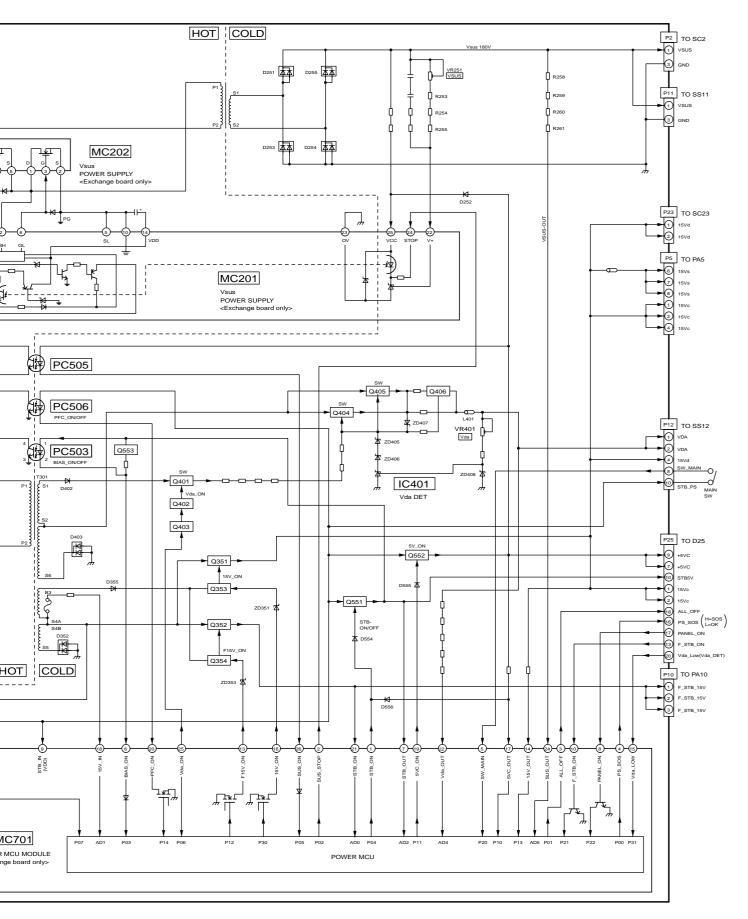


TH-50PV600E, TH-50PX600B P-Board Block Diagram


14.4. P-Board (1 of 2) Schematic Diagram

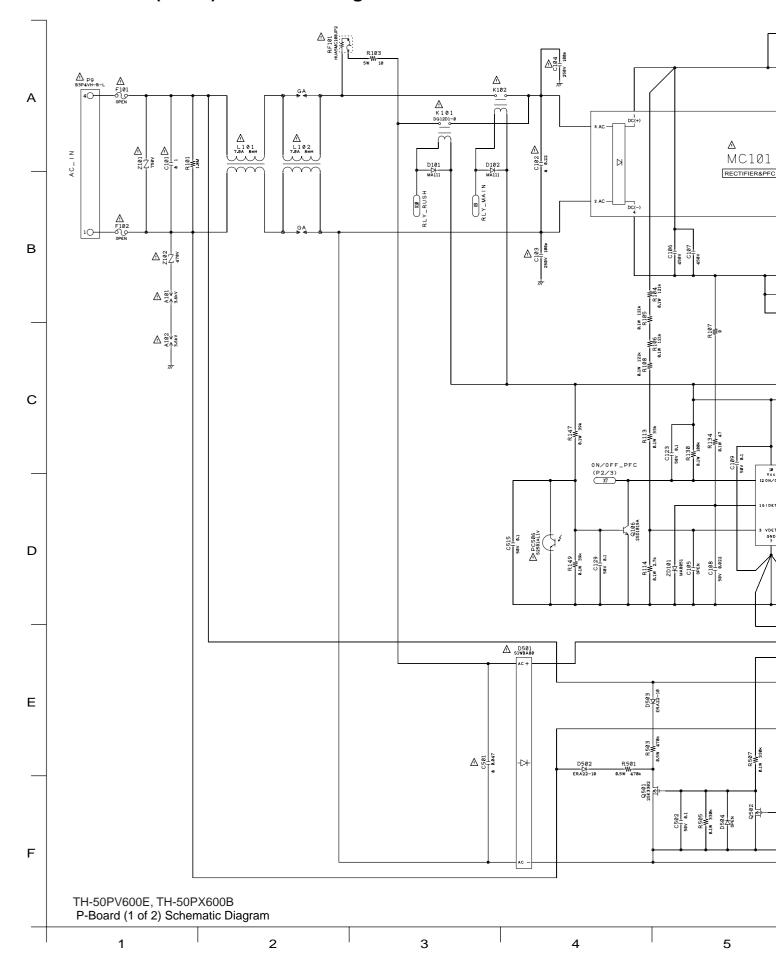

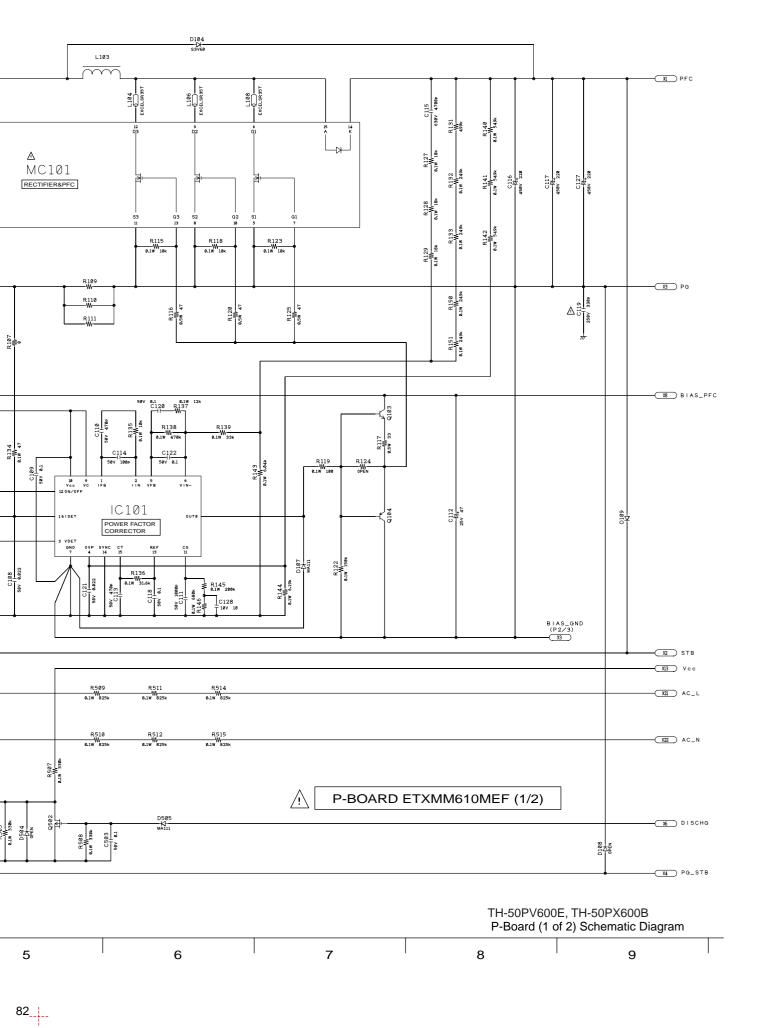


14.5. P-Board (2 of 2) Schematic Diagram

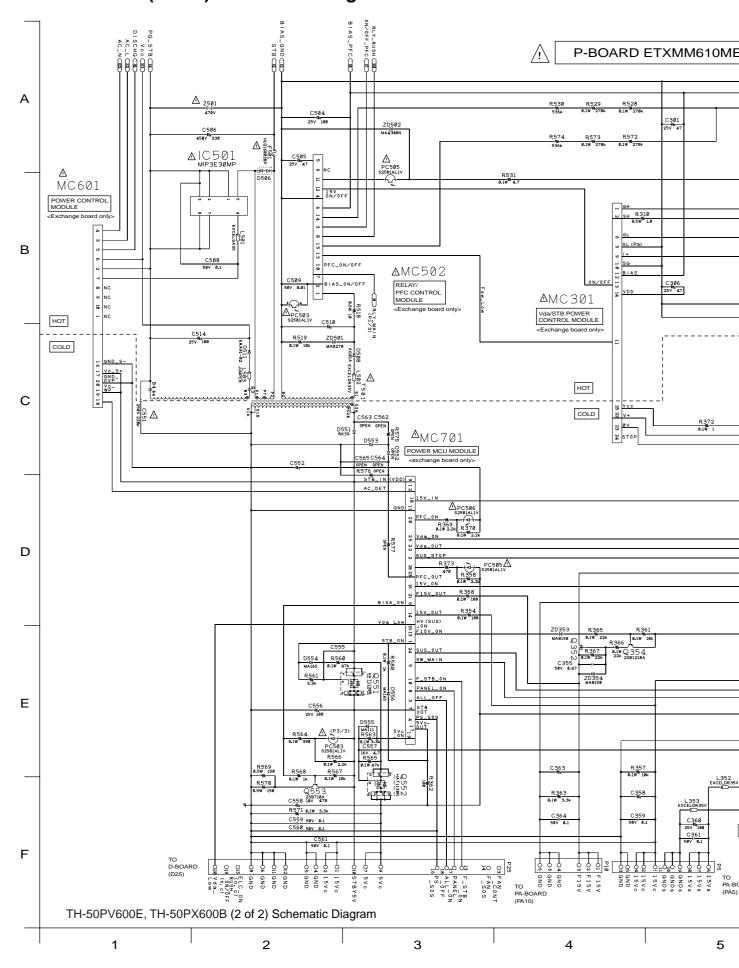


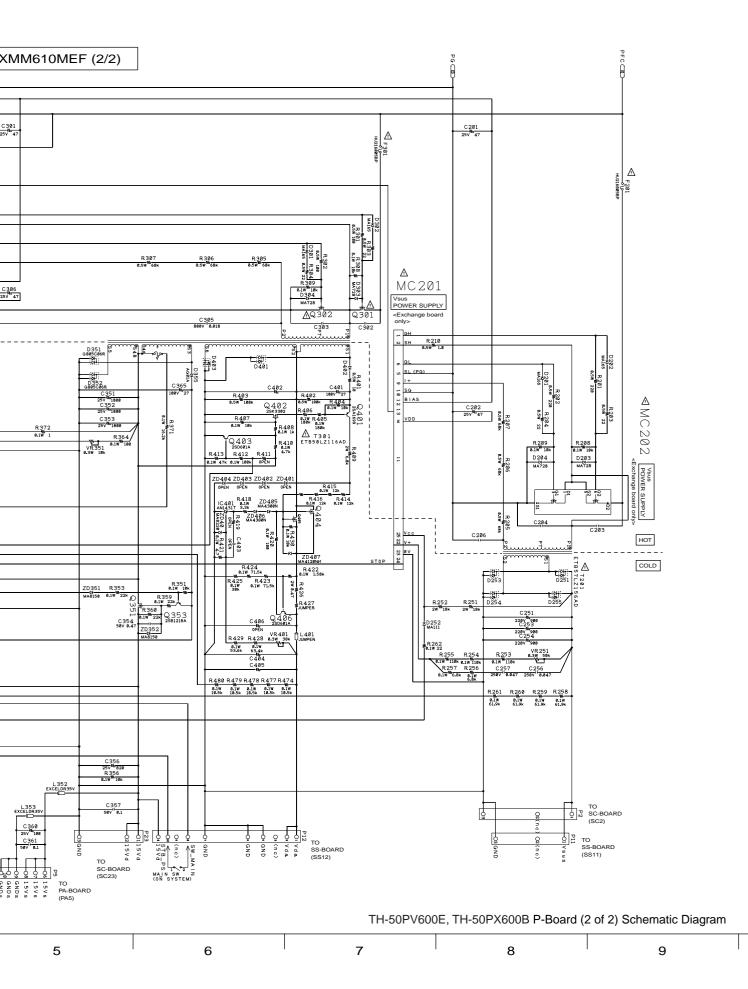

14.6. PA-Board Block Diagram

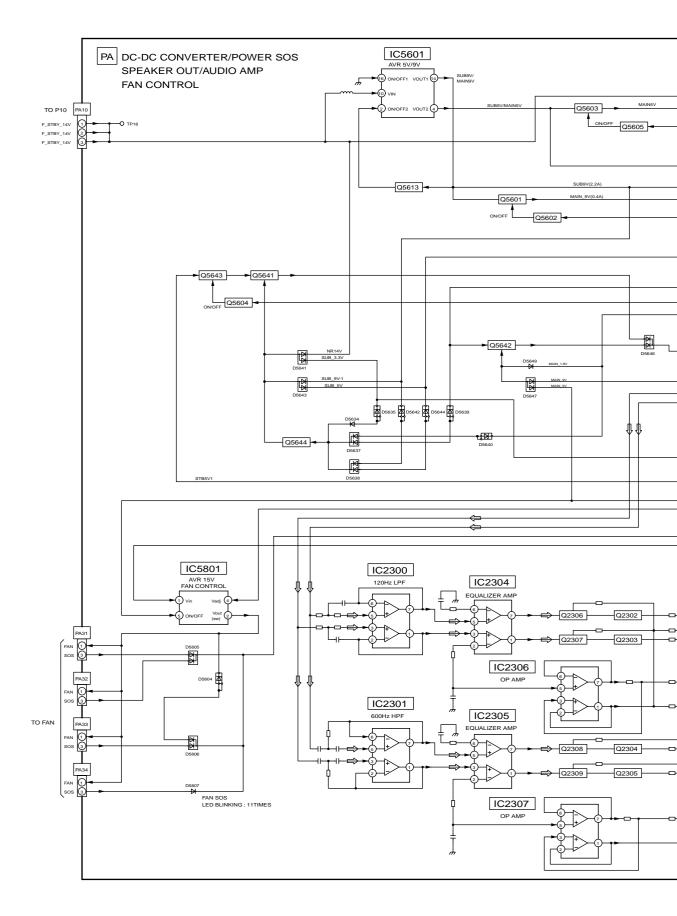



TH-50PV600E, TH-50PX600B PA-Board Block Diagram

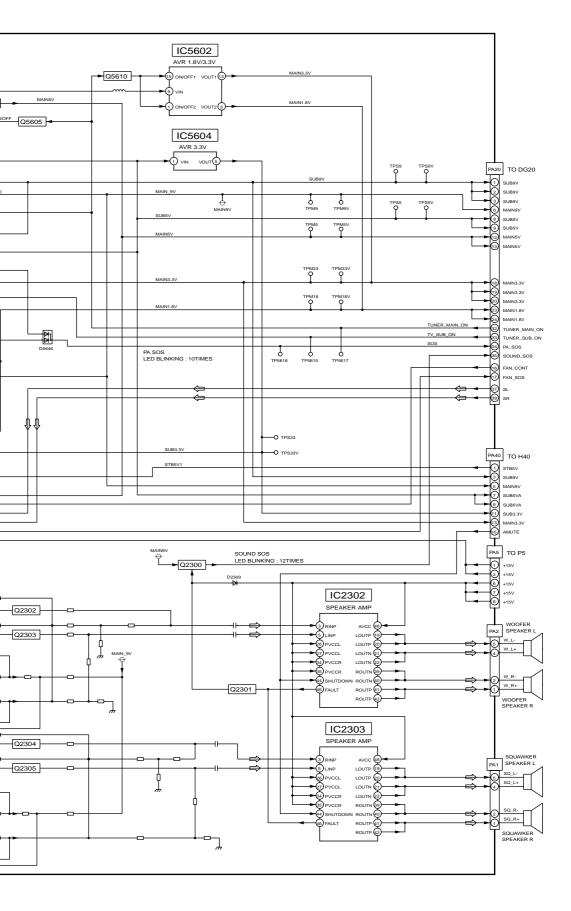


TH-50PV600E, TH-50PX600B PA-Board Block Diagram


14.7. PA-Board (1 of 3) Schematic Diagram

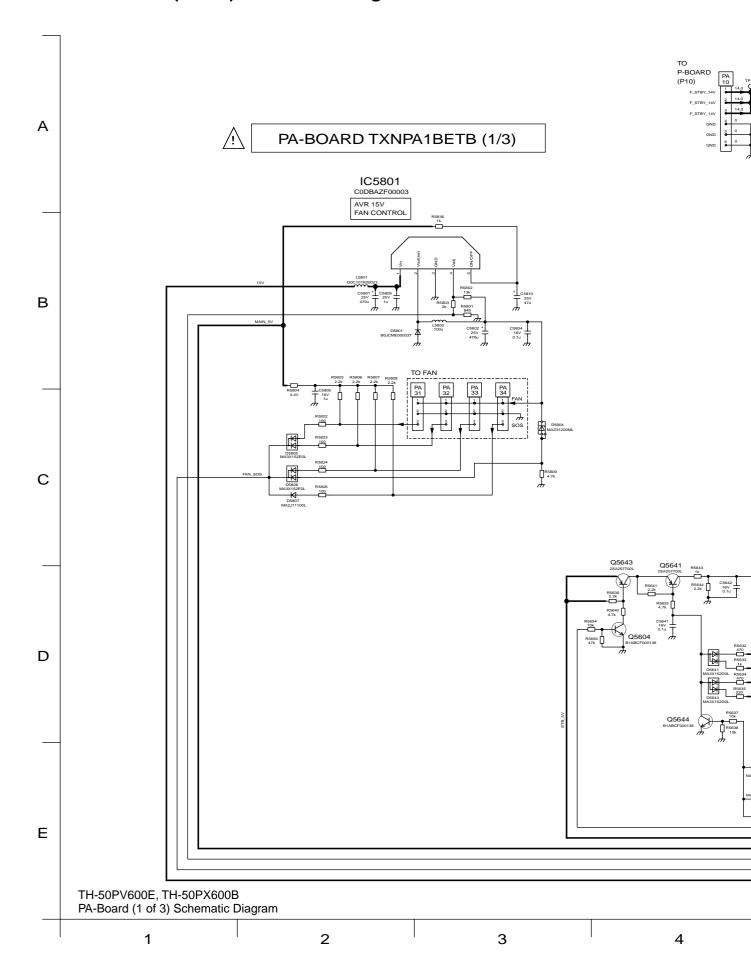

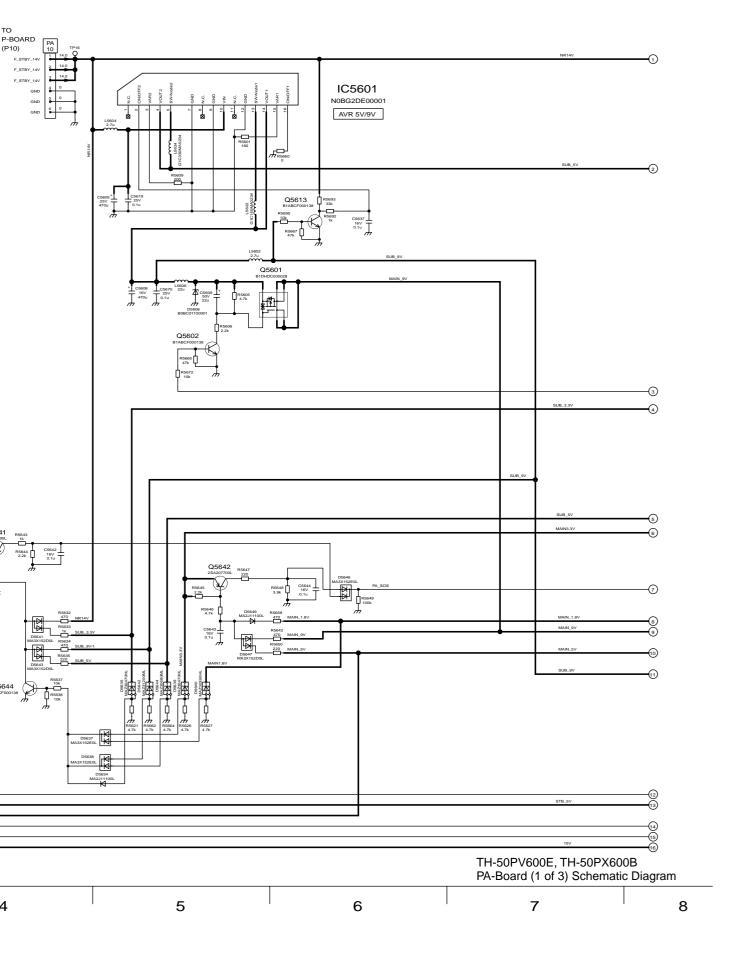


14.8. PA-Board (2 of 3) Schematic Diagram

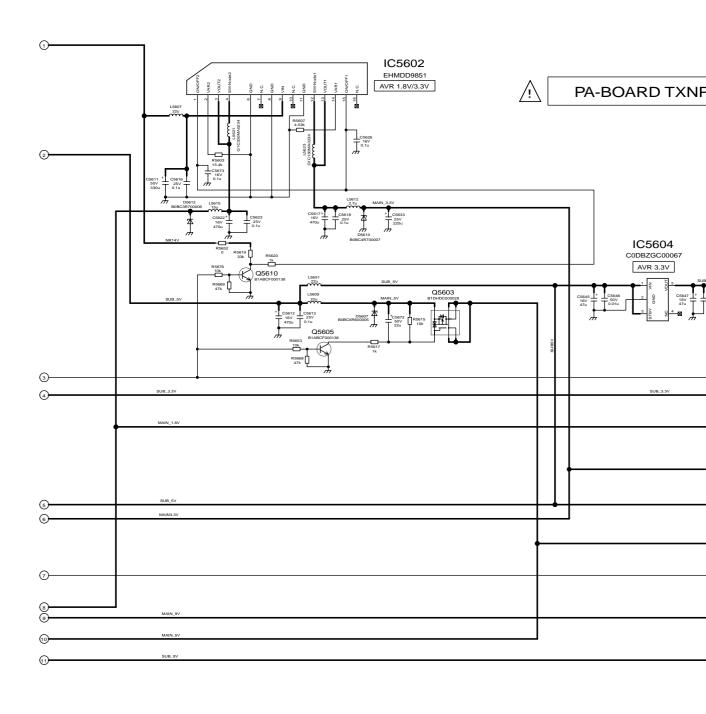


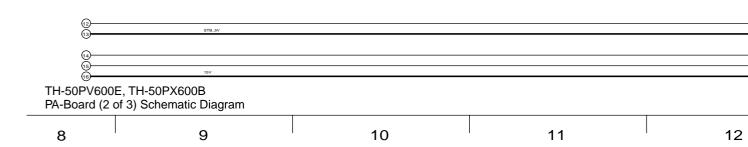


ARD TXNPA1BETB (2/3)

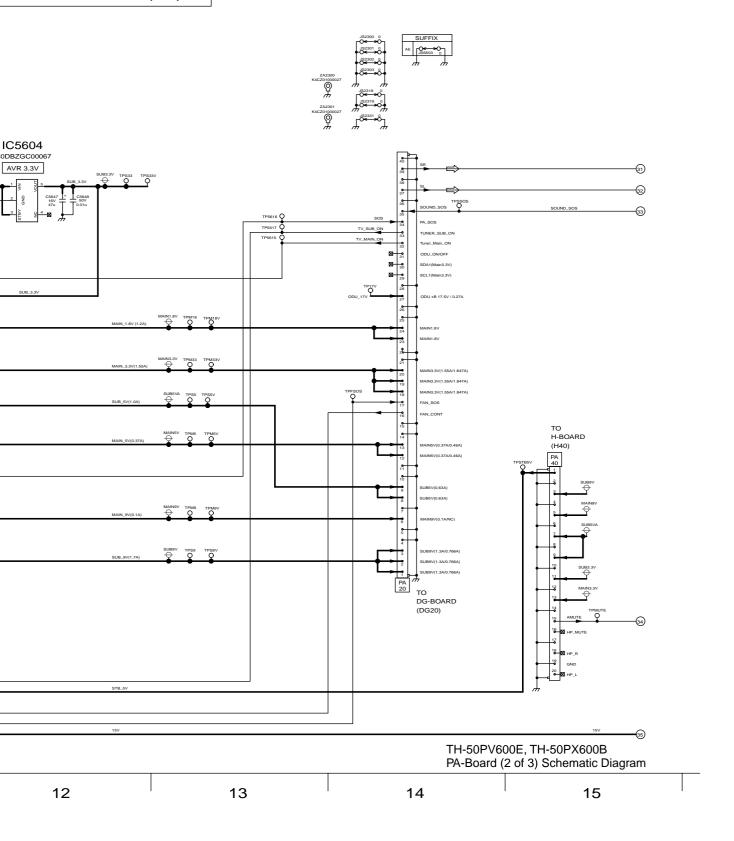

14.9. PA-Board (3 of 3) Schematic Diagram

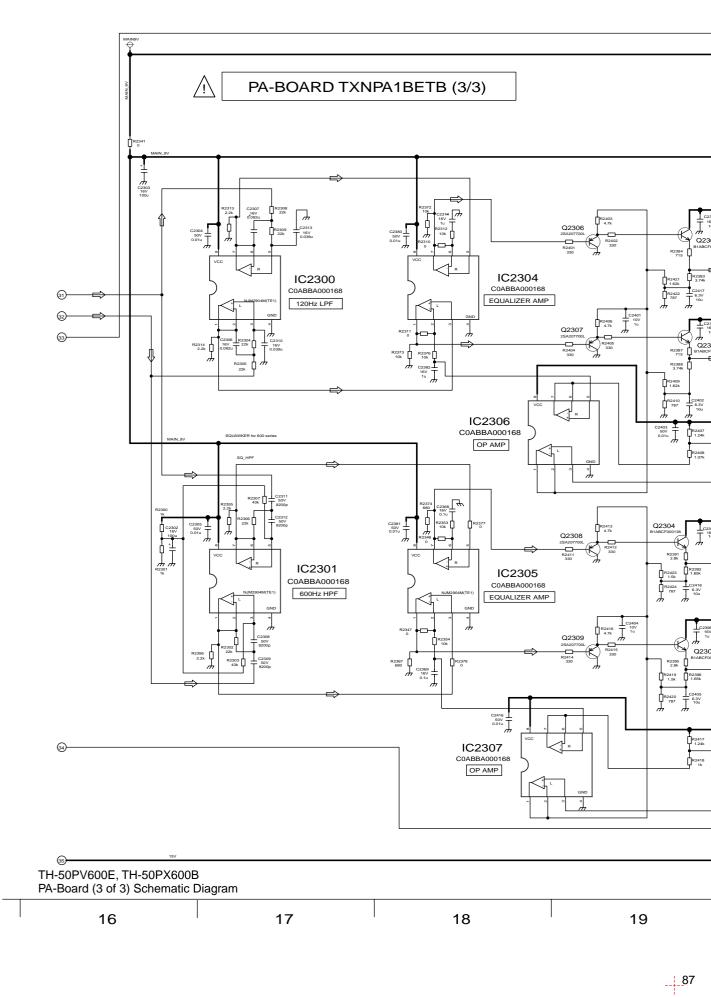



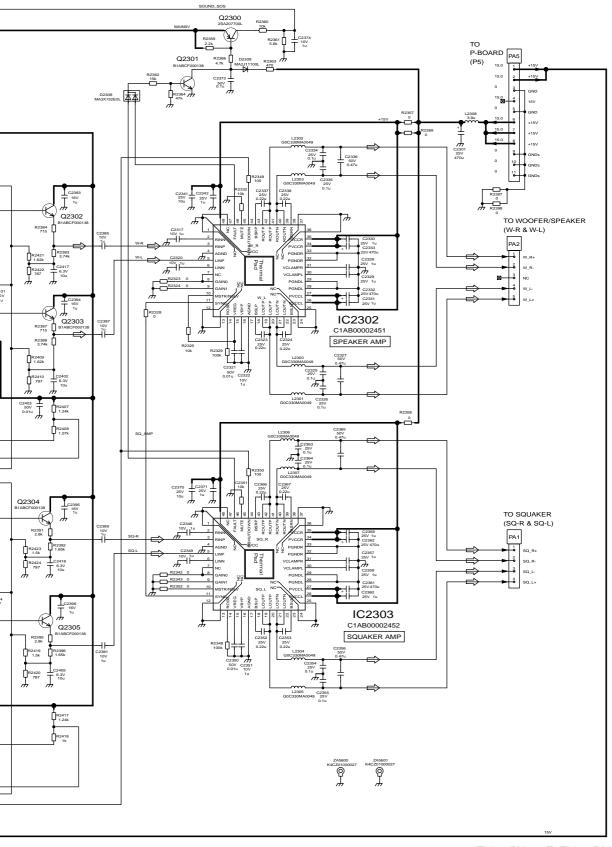

21


TH-50PV600E, TH-50PX600B PA-Board (3 of 3) Schematic Diagram

___87


20

9

14.10. H and TA-Board Block Diagram

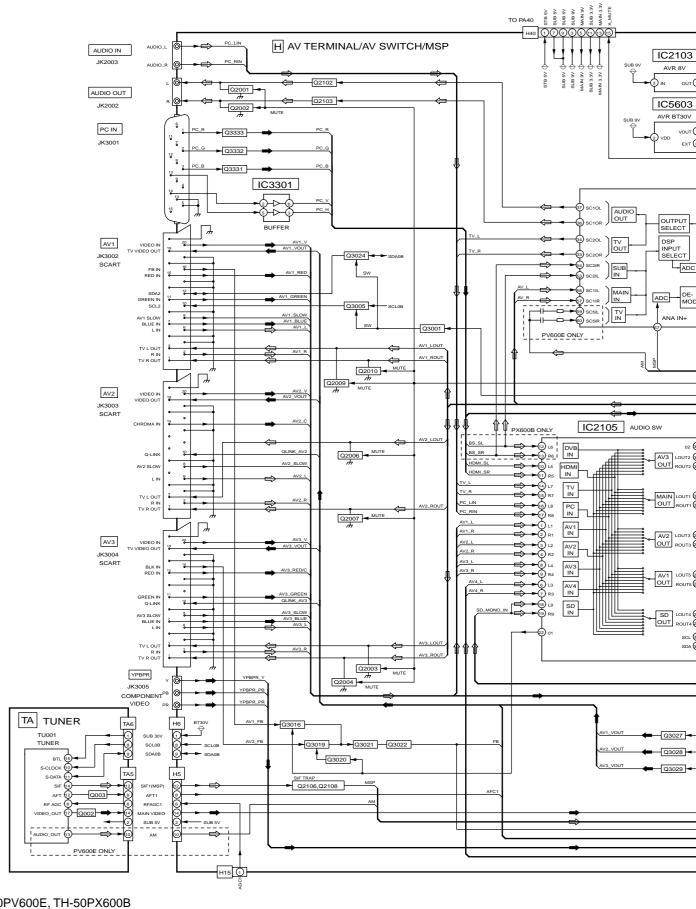


TH-50PV600E, TH-50PX600B H-Board Block Diagram

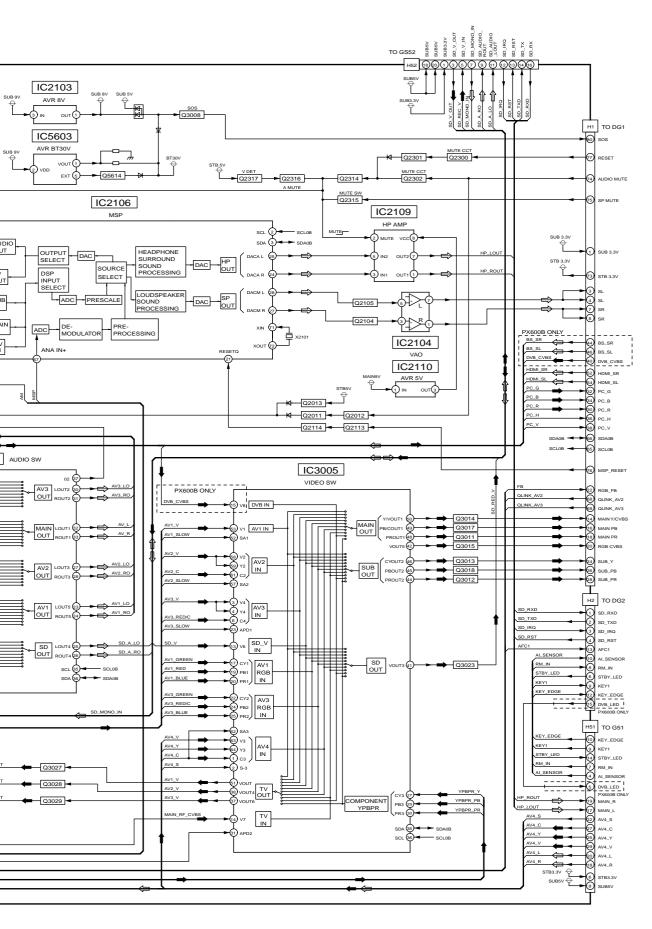


TH-50PV600E, TH-50PX600B H-Board Block Diagram

14.11. G, GK, GS, HC and K-Board Block Diagram

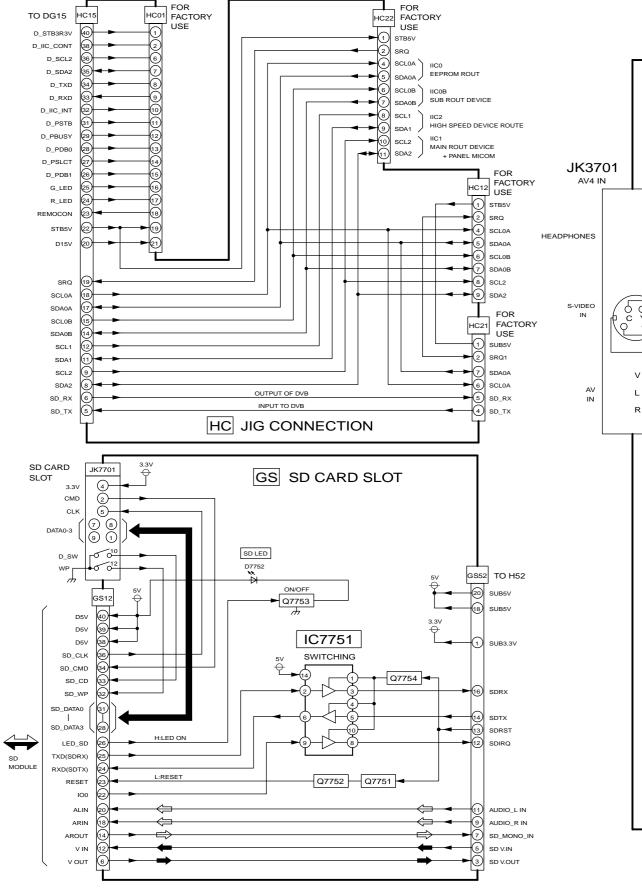


TH-50PV600E, TH-50PX600B G, GK, GS, HC and K-Board Block Diagram




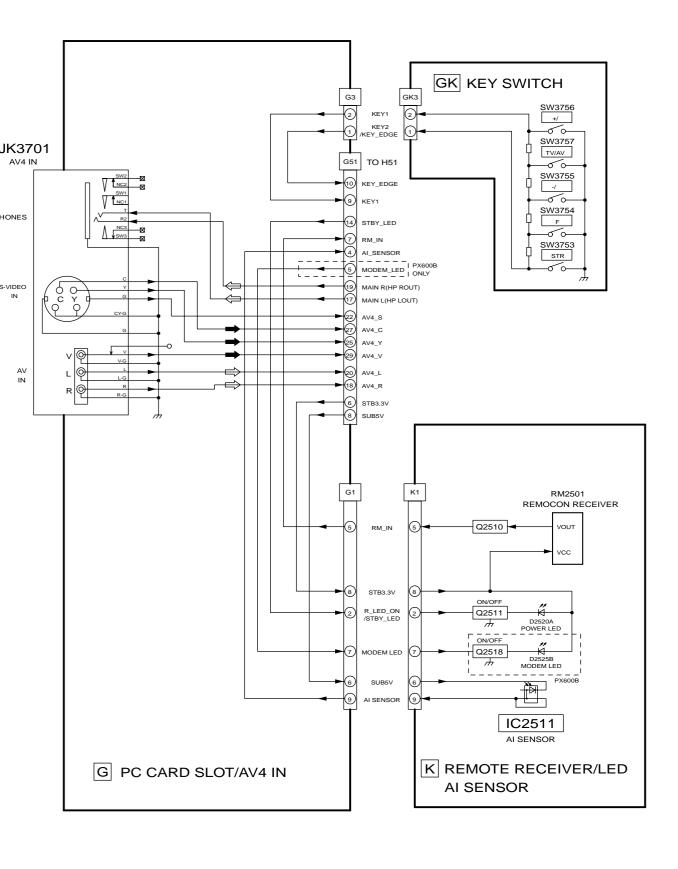


TH-50PV600E, TH-50PX600B G, GK, GS, HC and K-Board Block Diagram


14.12. H-Board (1 of 3)Schematic Diagram

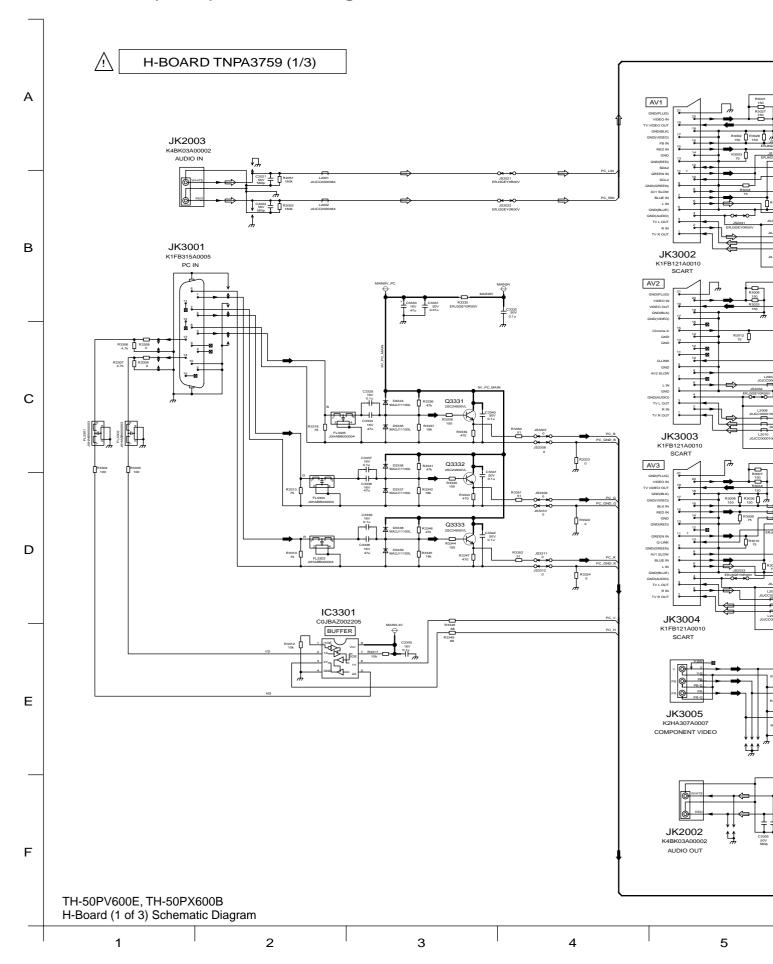

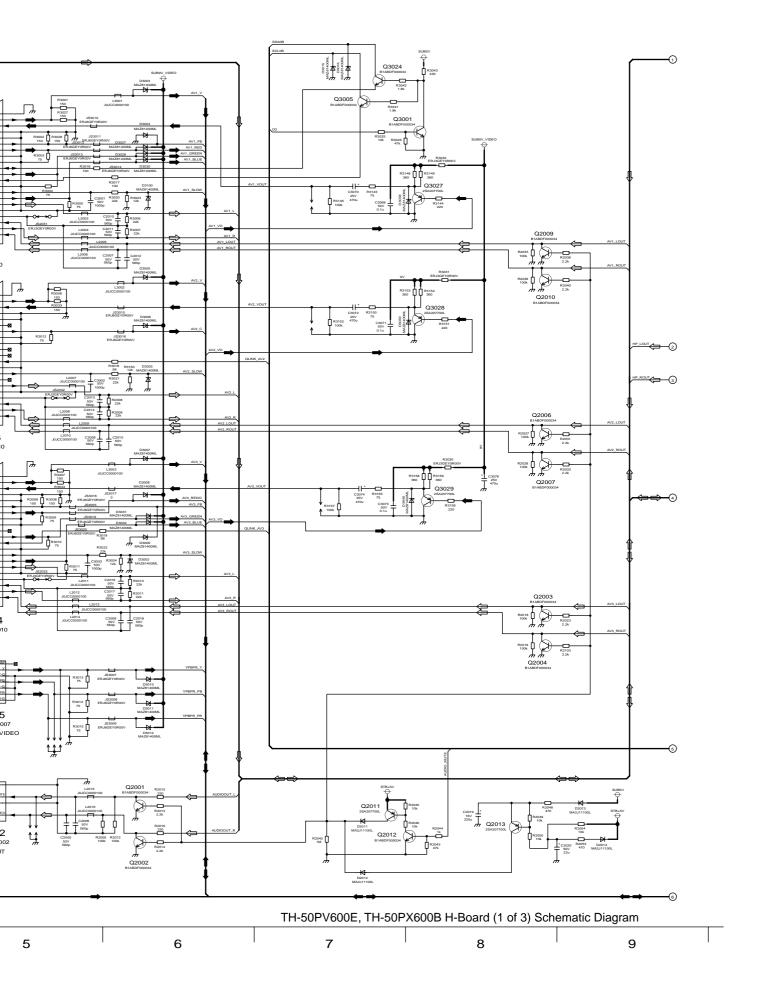



14.13. H-Board (2 of 3)Schematic Diagram

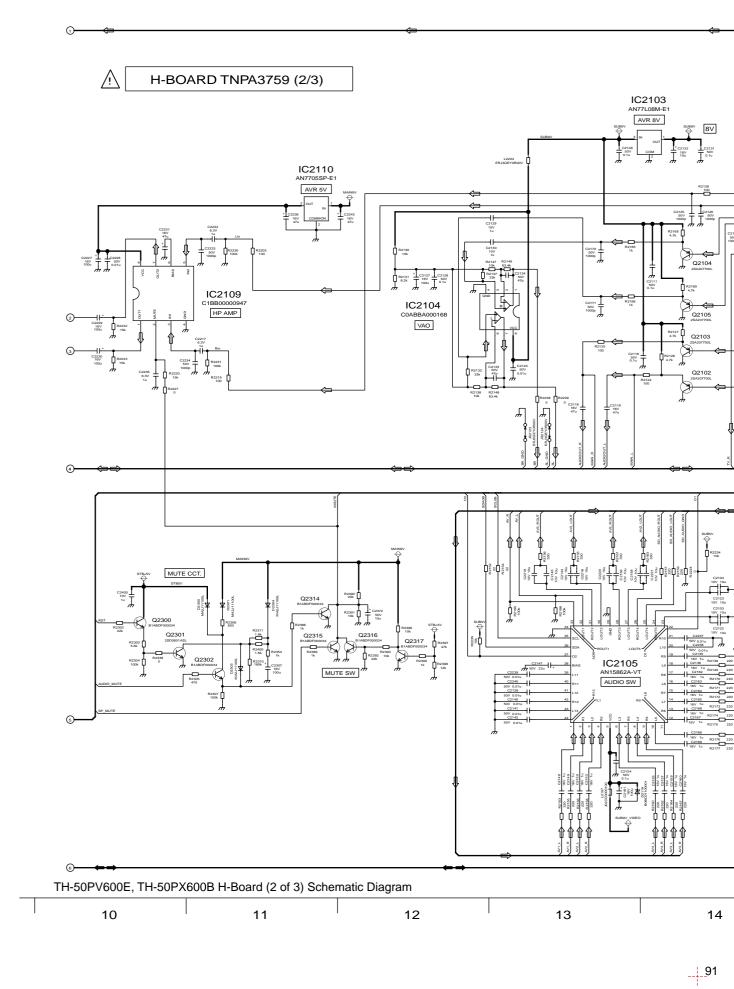

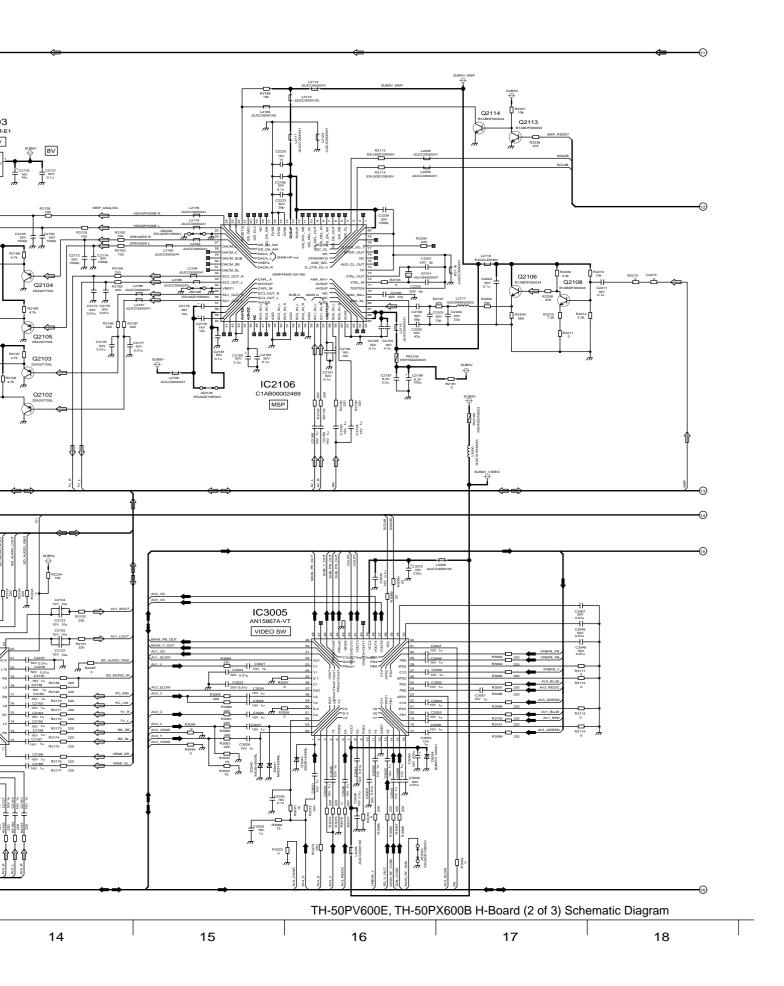


14.14. H-Board (3 of 3)Schematic Diagram

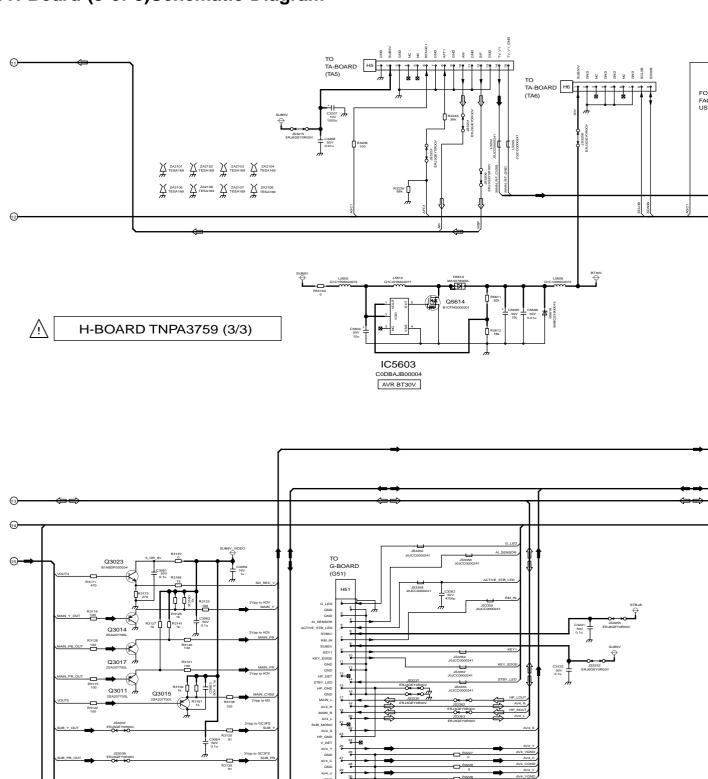






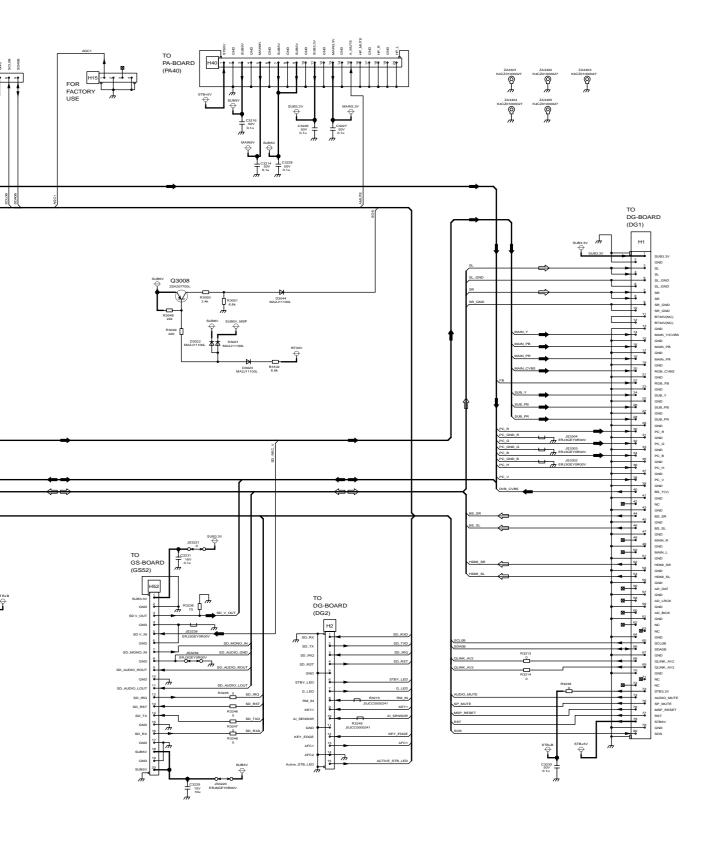





14.15. G-Board Schematic Diagram

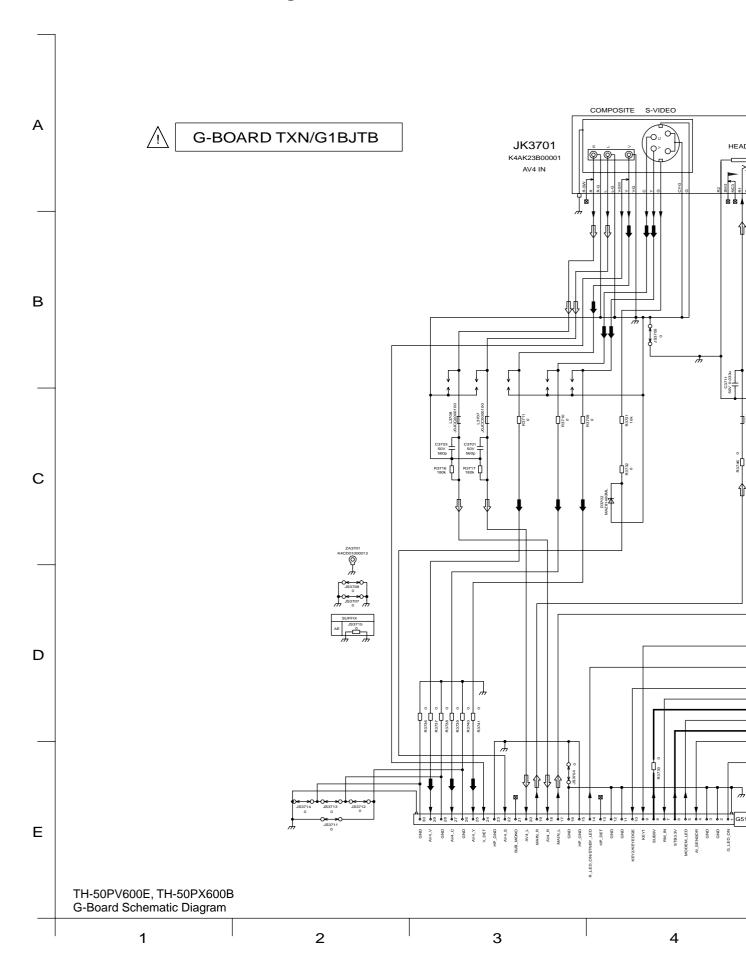




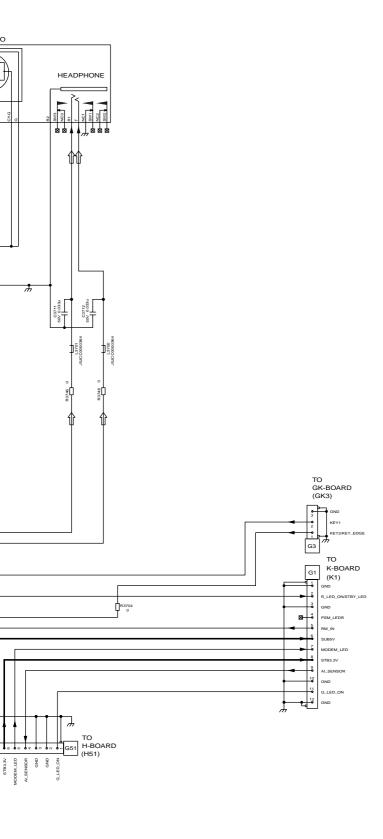




___93

14.16. GS-Board Schematic Diagram

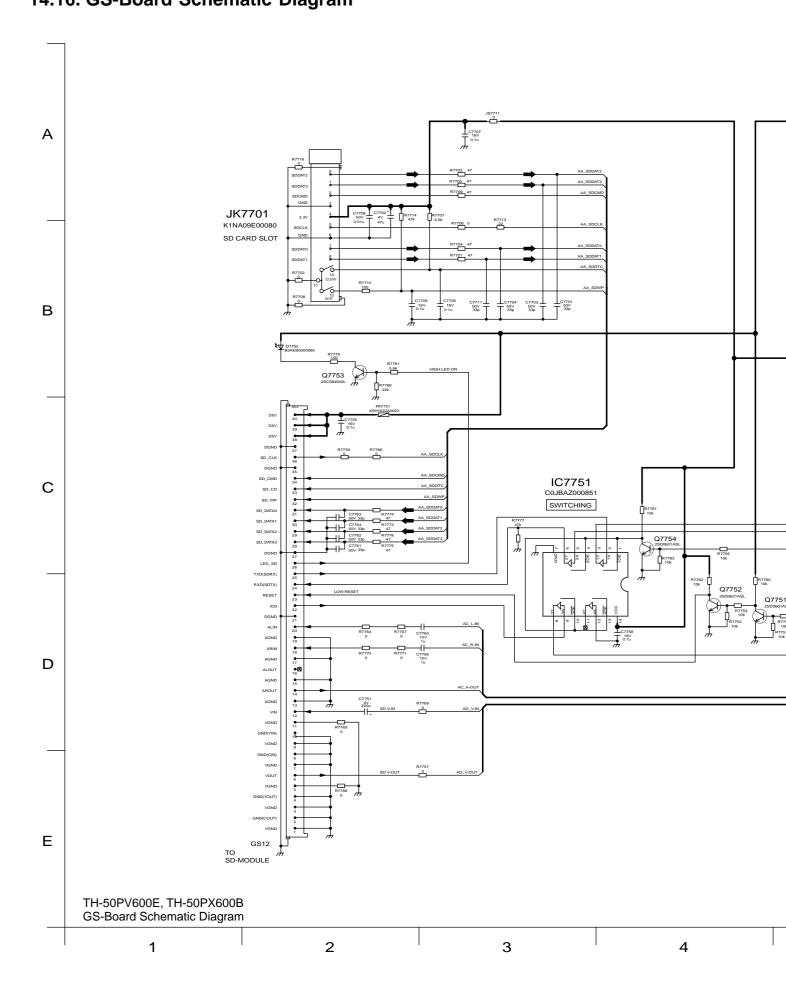




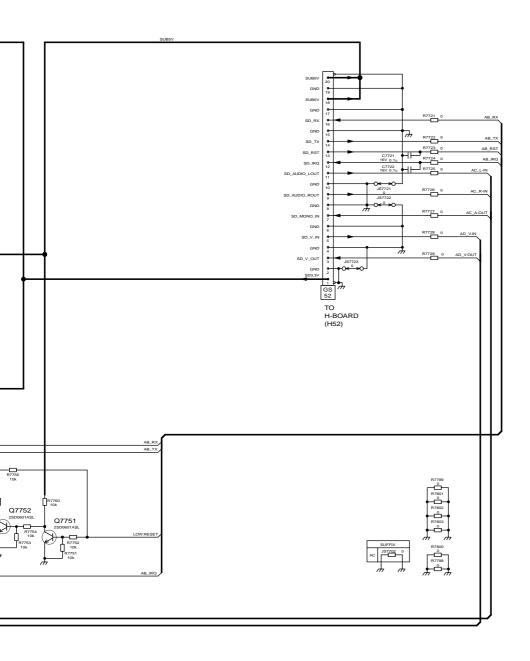


GS-BOARD TXNGS1BETB




14.17. GK, K, HC and TA-Board Schematic Diagram

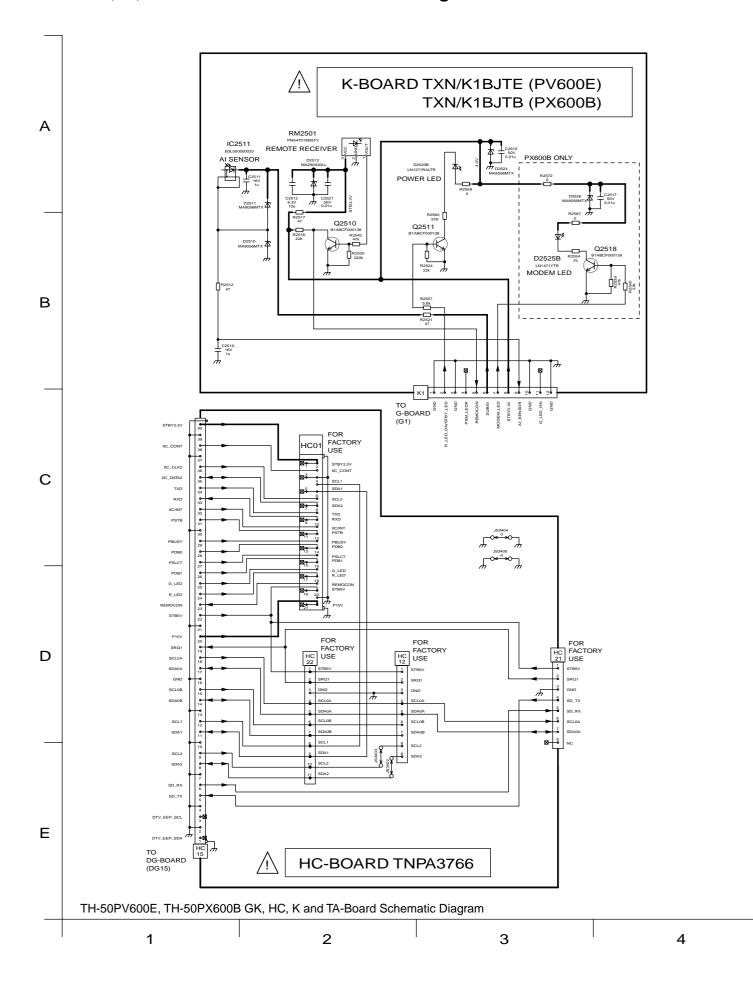



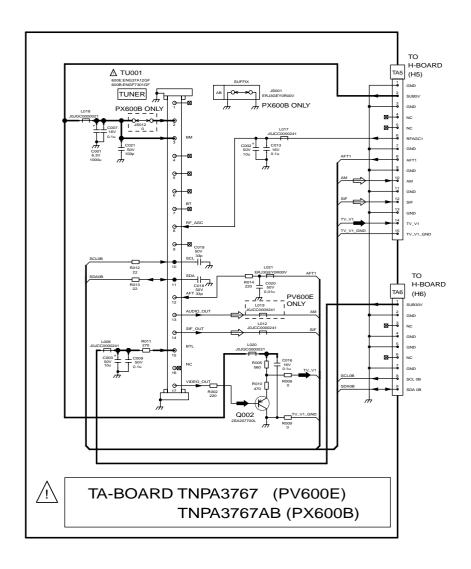


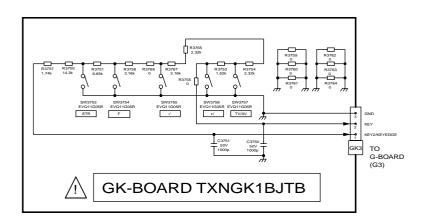


TH-50PV600E, TH-50PX600B
GK, HC, K and TA-Board Schematic Diagram

5 6 7 8

14.18. DG-Board (1 of 3) Block Diagram

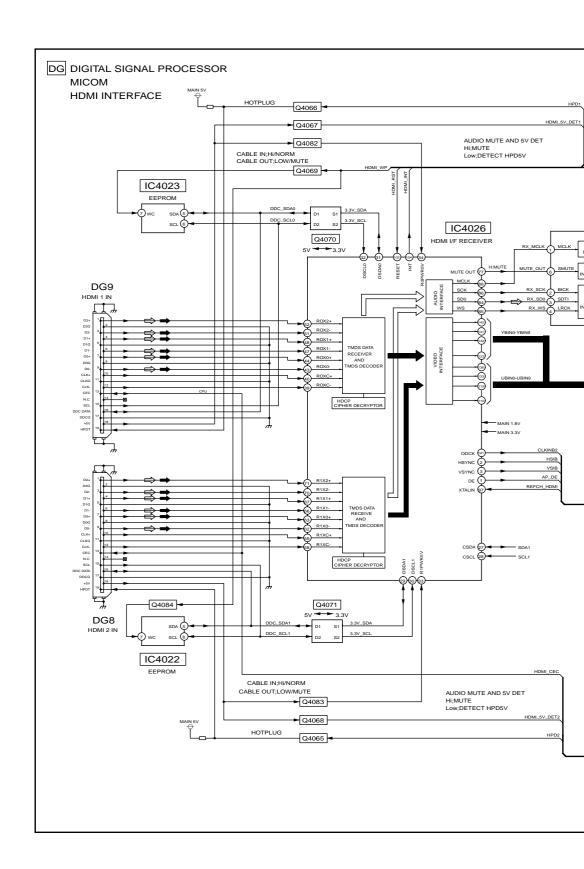




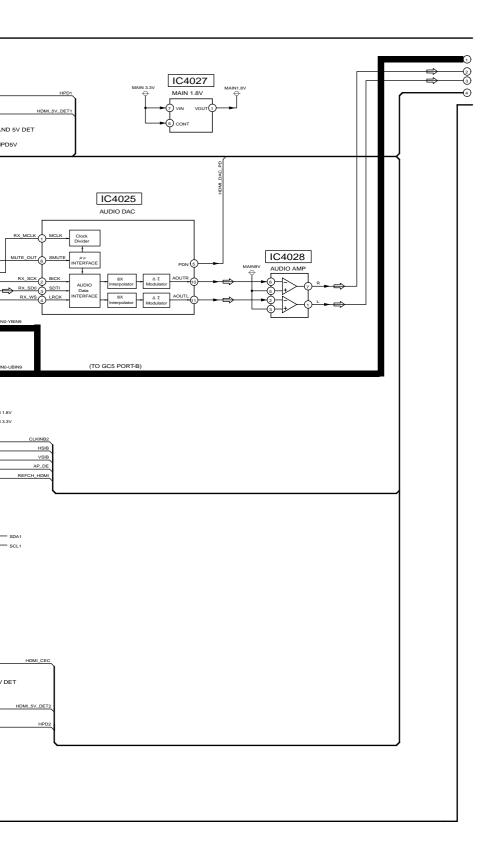


TH-50PV600E, TH-50PX600B DG-Board (1 of 3) Block Diagram


14.19. DG-Board (2 of 3) Block Diagram

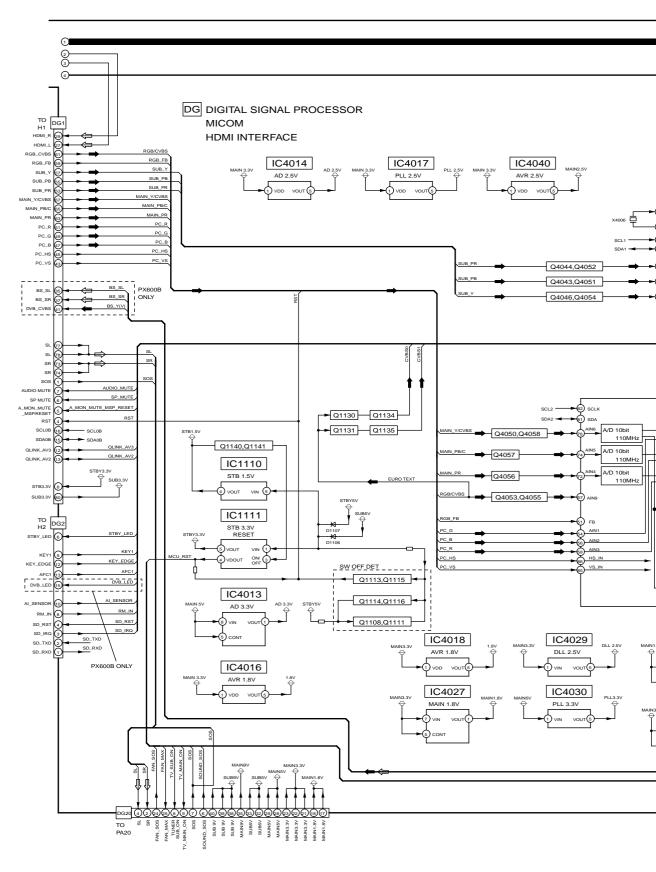


TH-50PV600E, TH-50PX600B DG-Board (2 of 3) Block Diagram

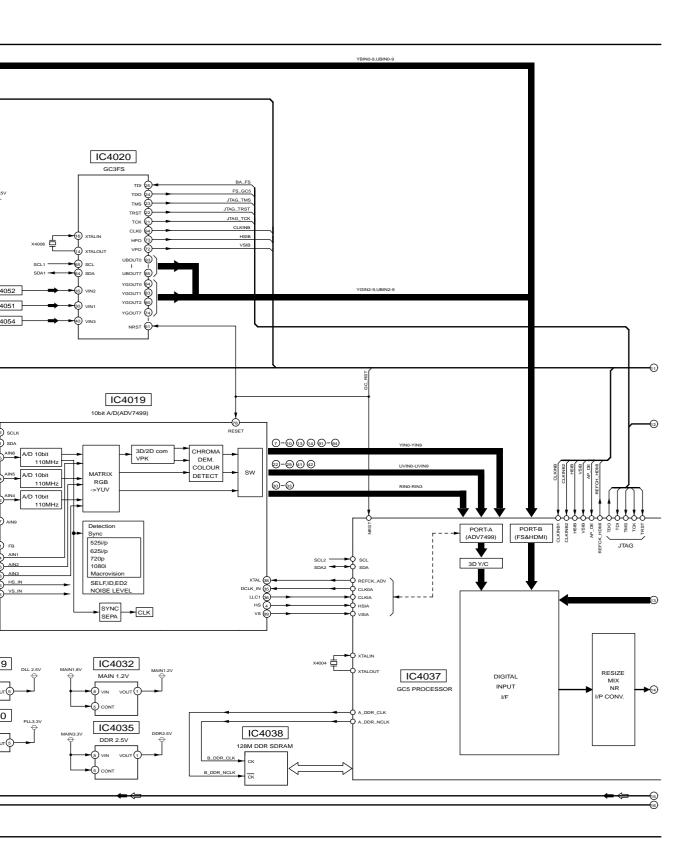

14.20. DG-Board (3 of 3) Block Diagram

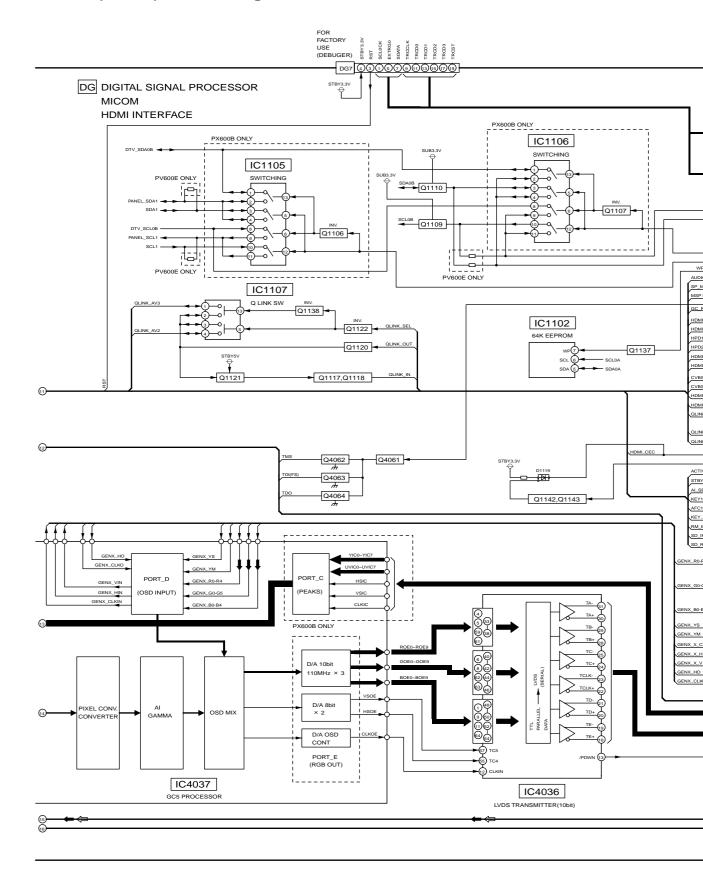



TH-50PV600E, TH-50PX600B DG-Board (3 of 3) Block Diagram

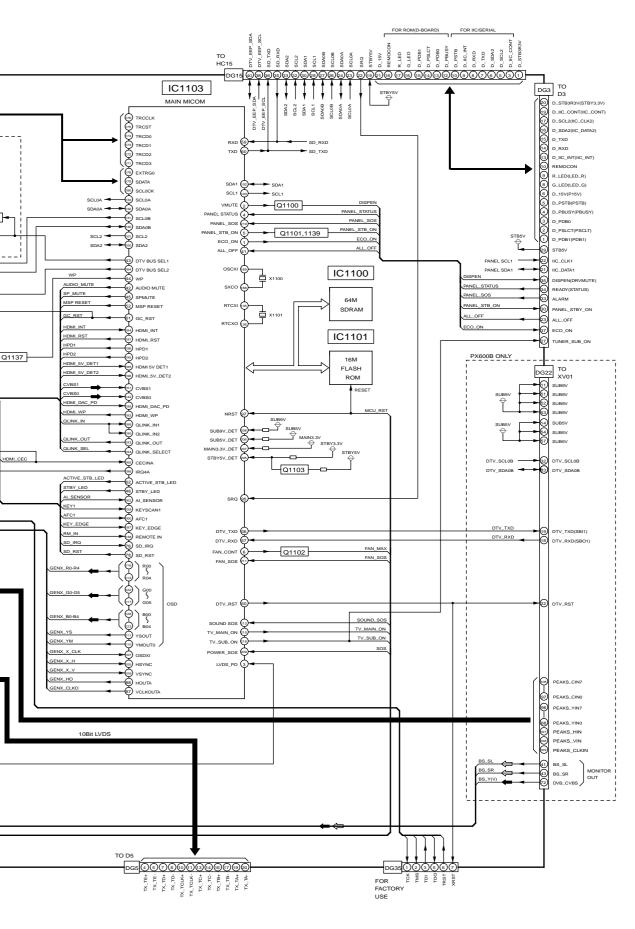


TH-50PV600E, TH-50PX600B DG-Board (3 of 3) Block Diagram


14.21. DG-Board (1 of 8) Schematic Diagram

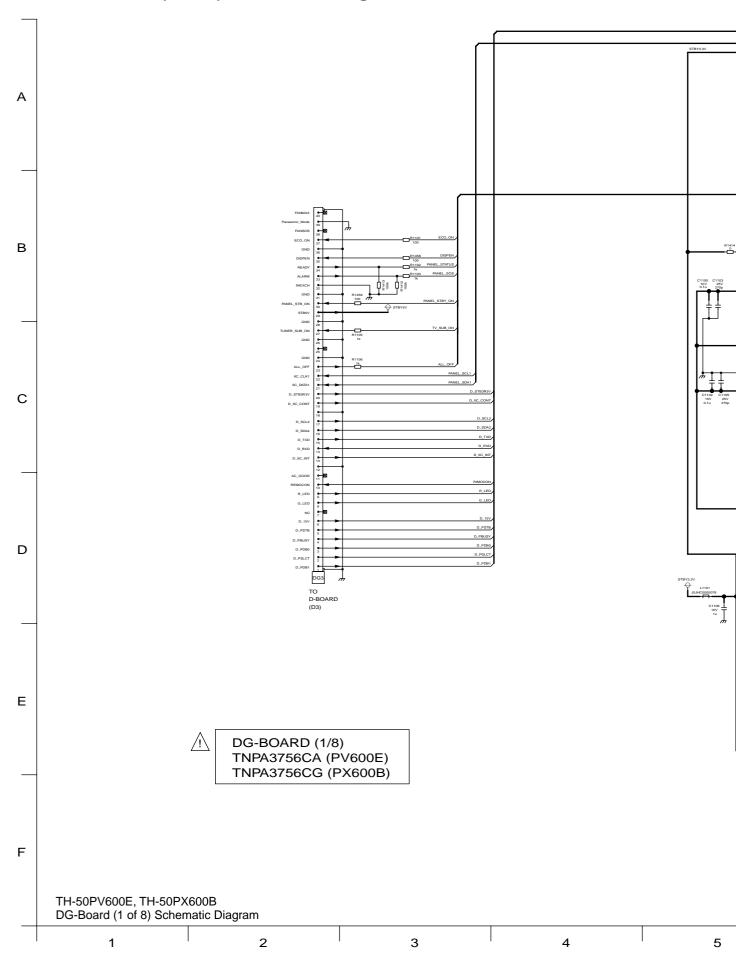

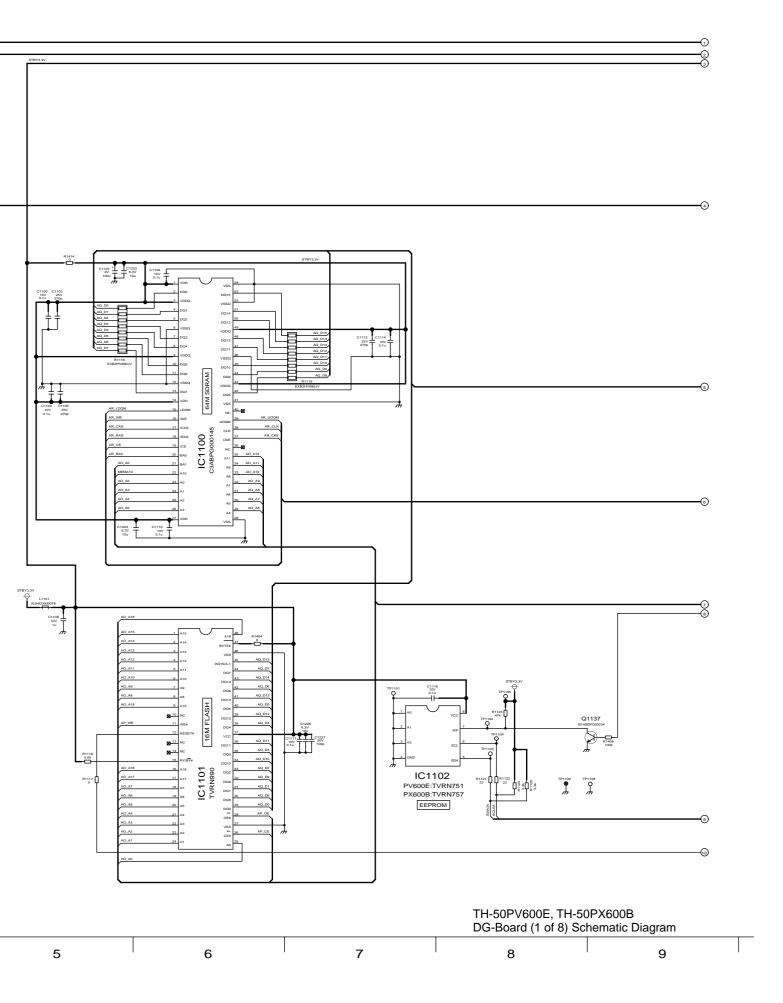



14.22. DG-Board (2 of 8) Schematic Diagram

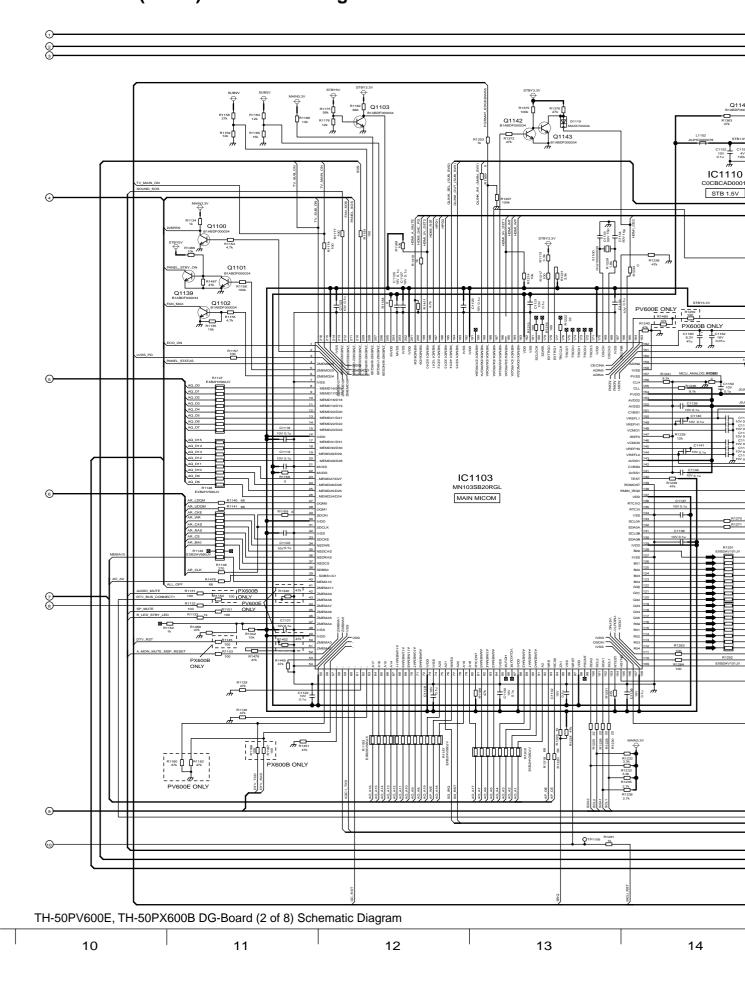

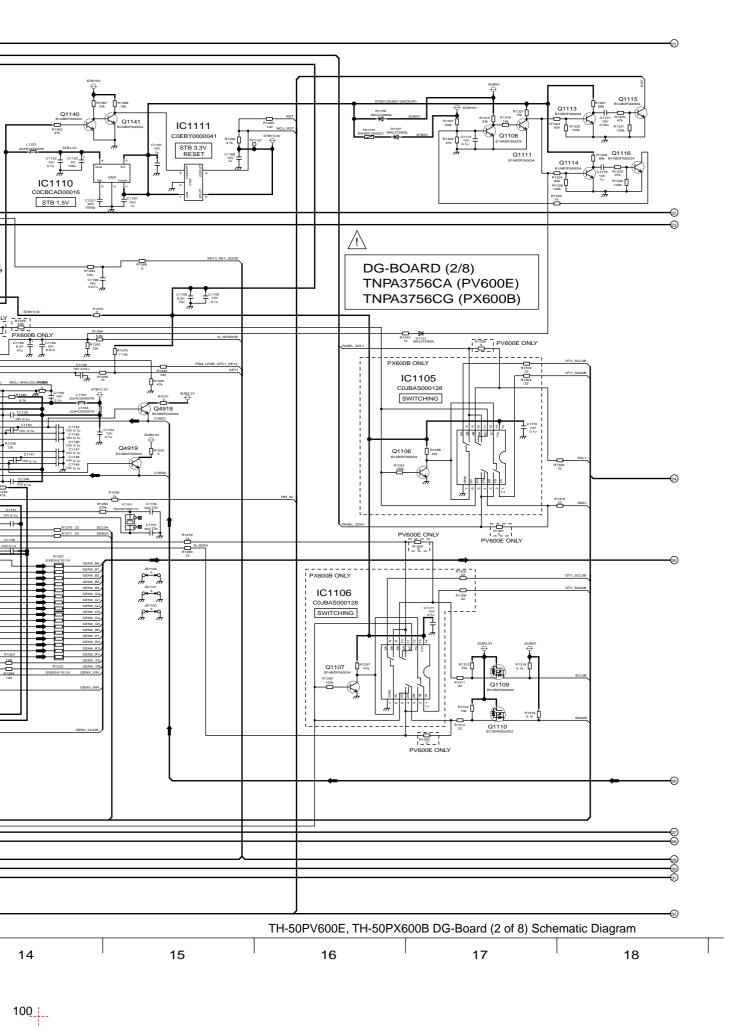


14.23. DG-Board (3 of 8) Schematic Diagram

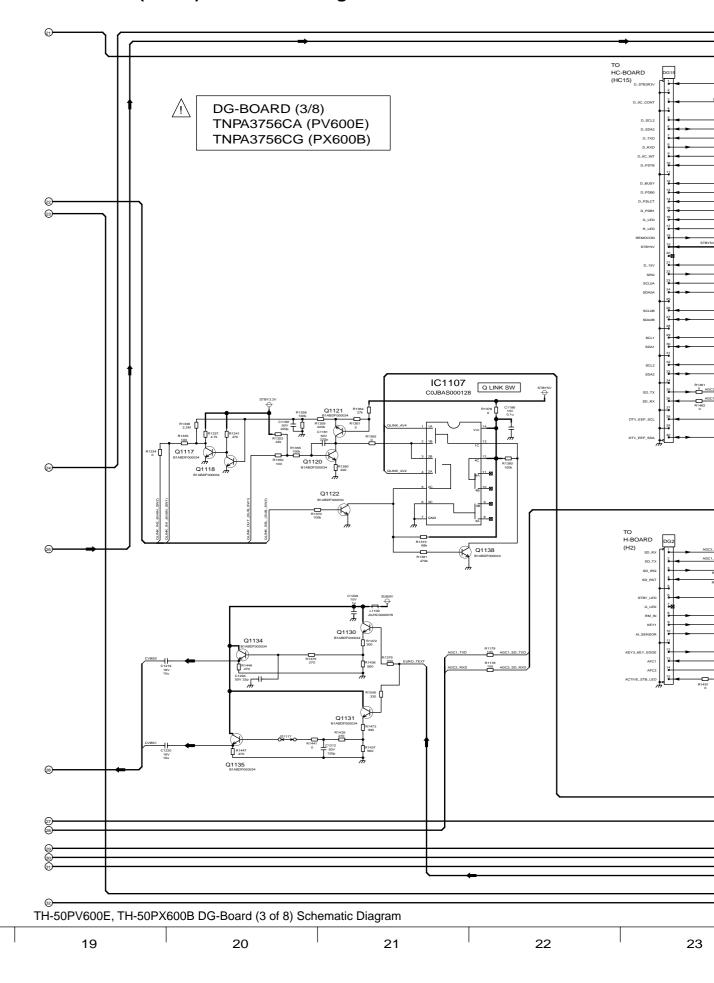


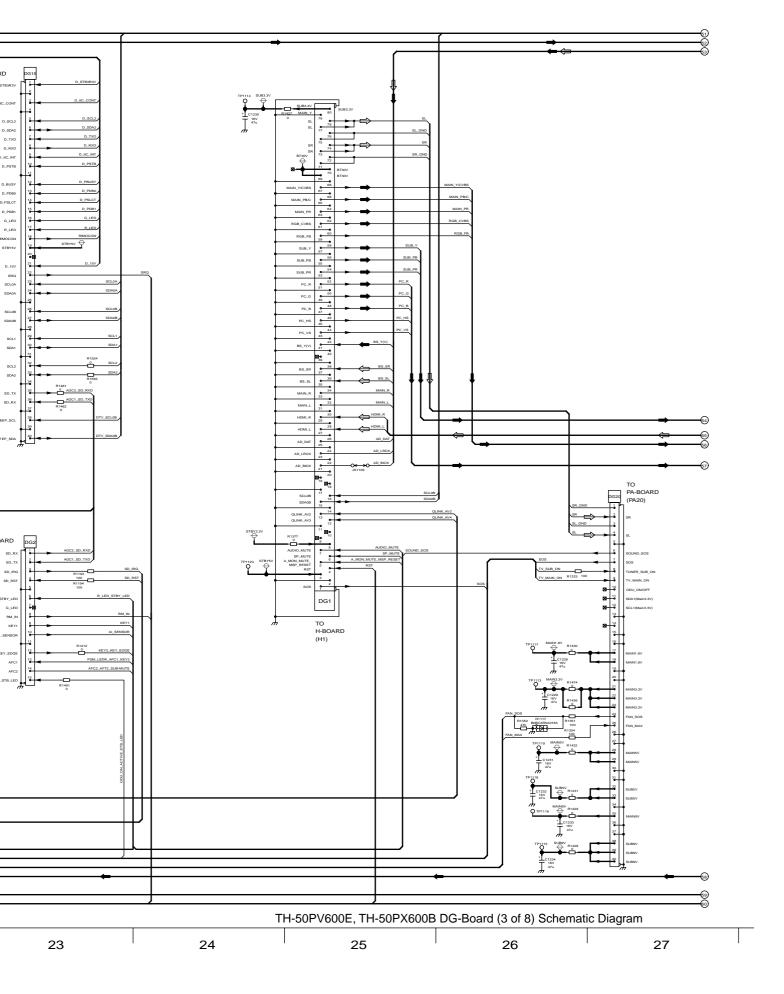


14.24. DG-Board (4 of 8) Schematic Diagram

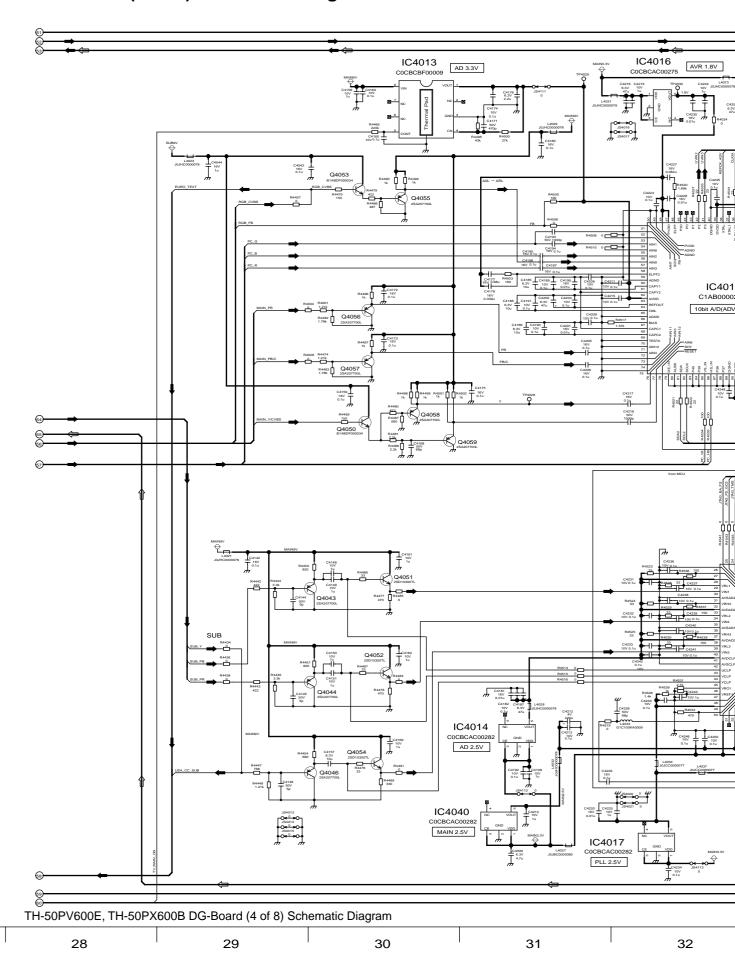




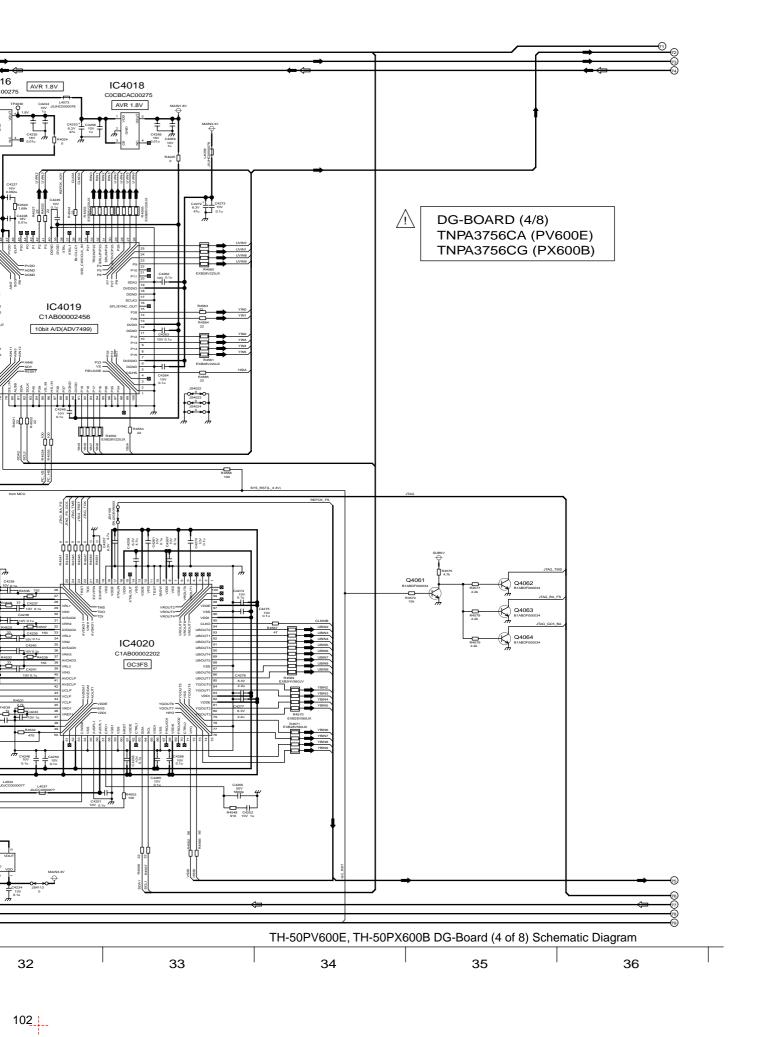


14.25. DG-Board (5 of 8) Schematic Diagram

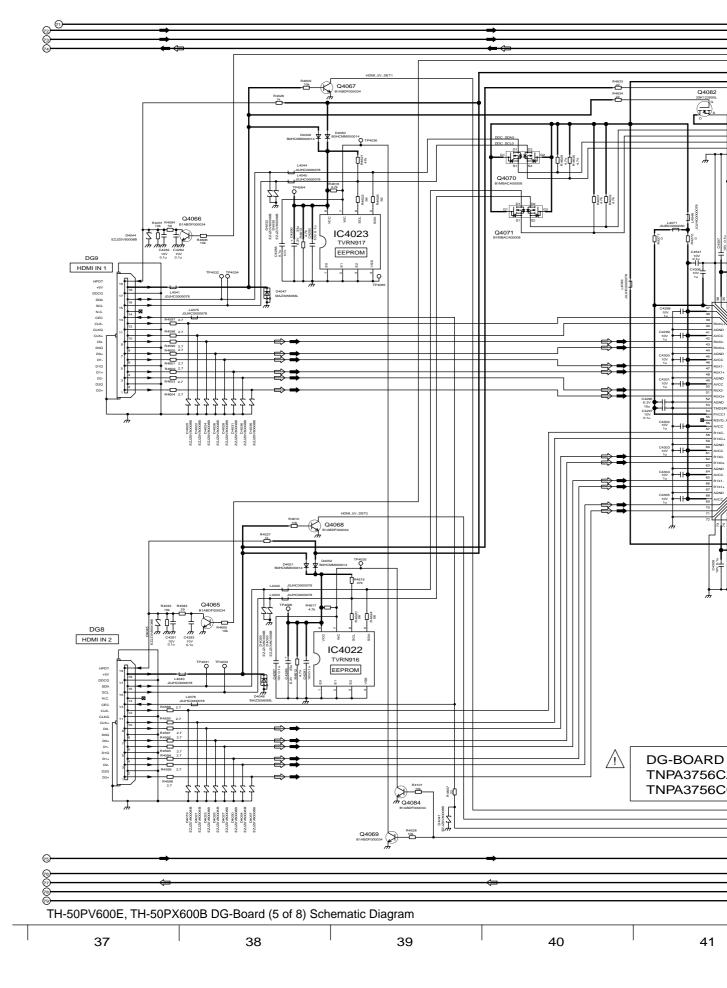




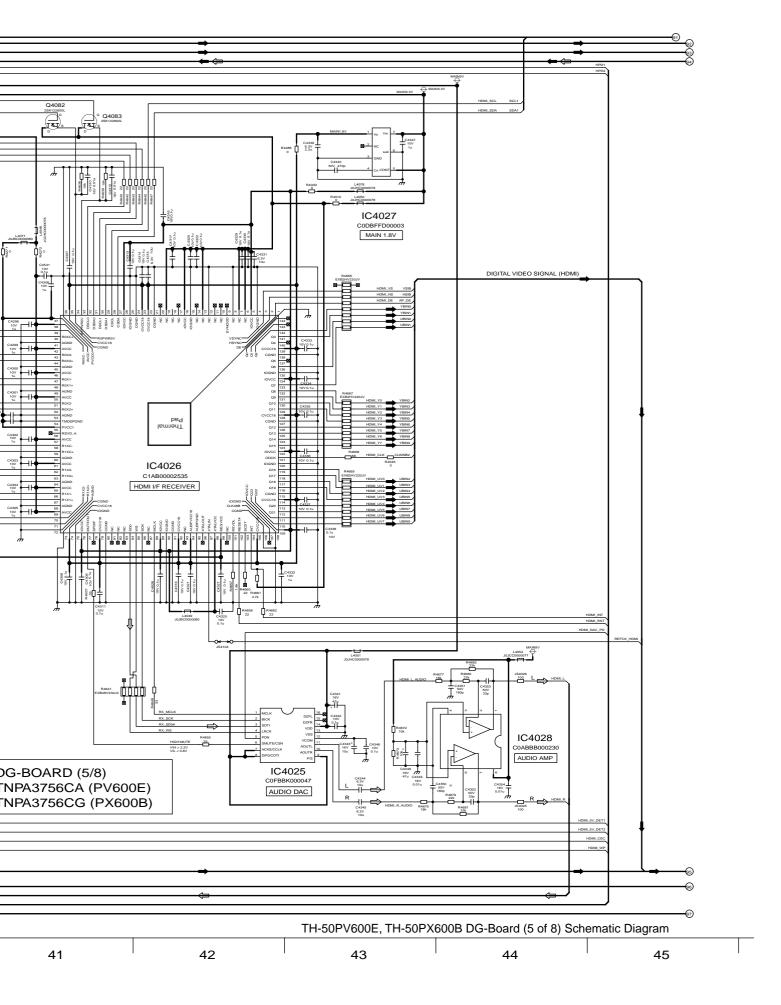


14.26. DG-Board (6 of 8) Schematic Diagram

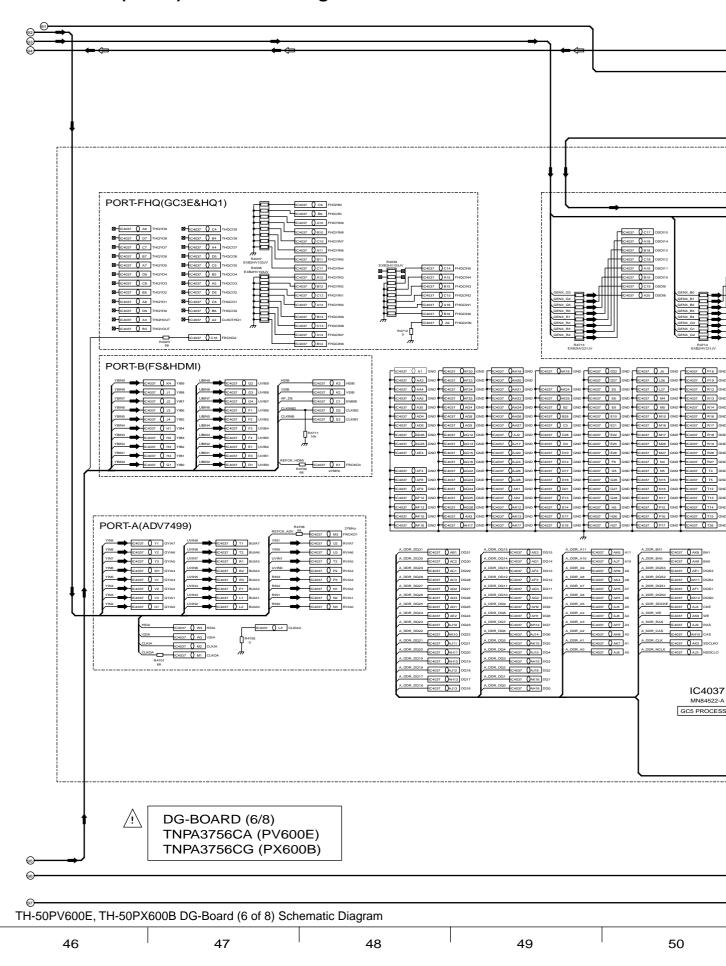




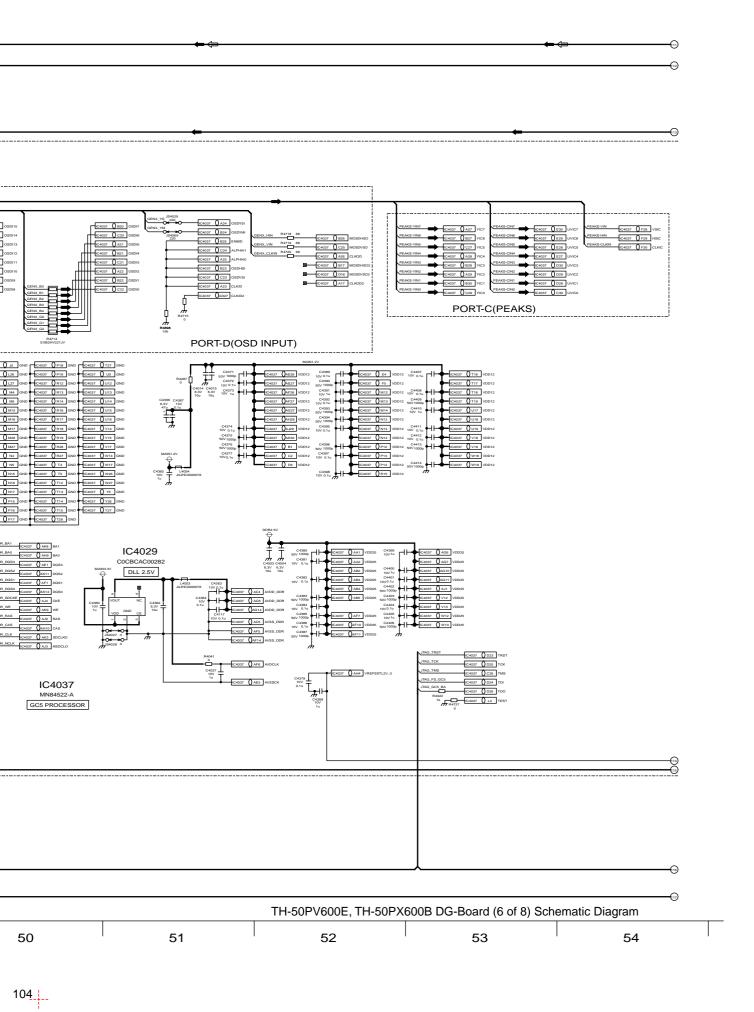


14.27. DG-Board (7 of 8) Schematic Diagram

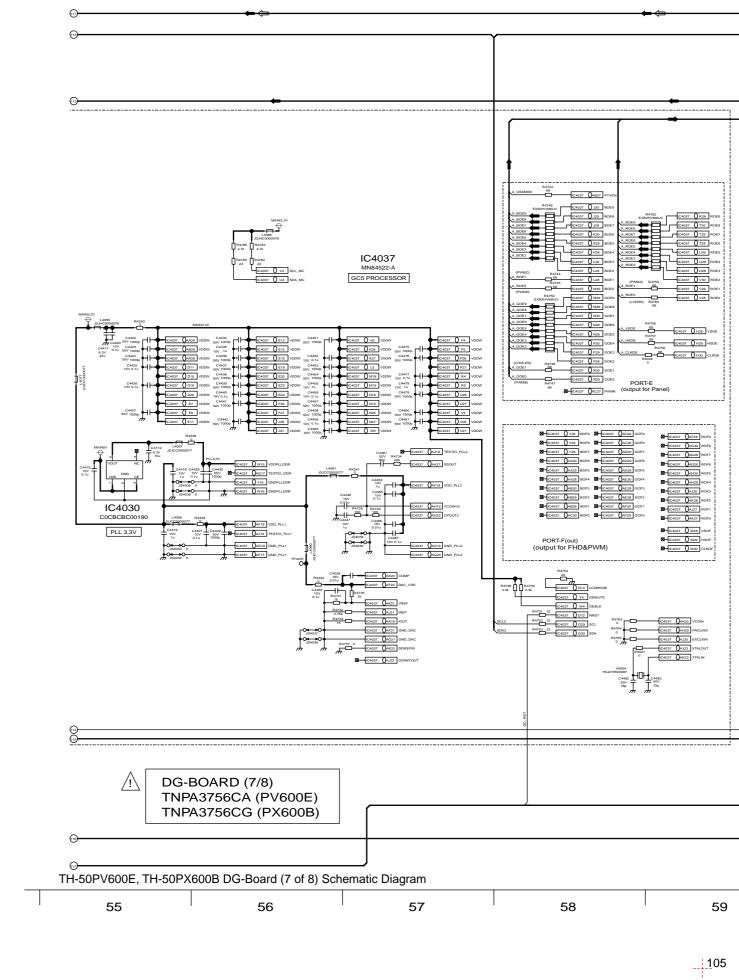




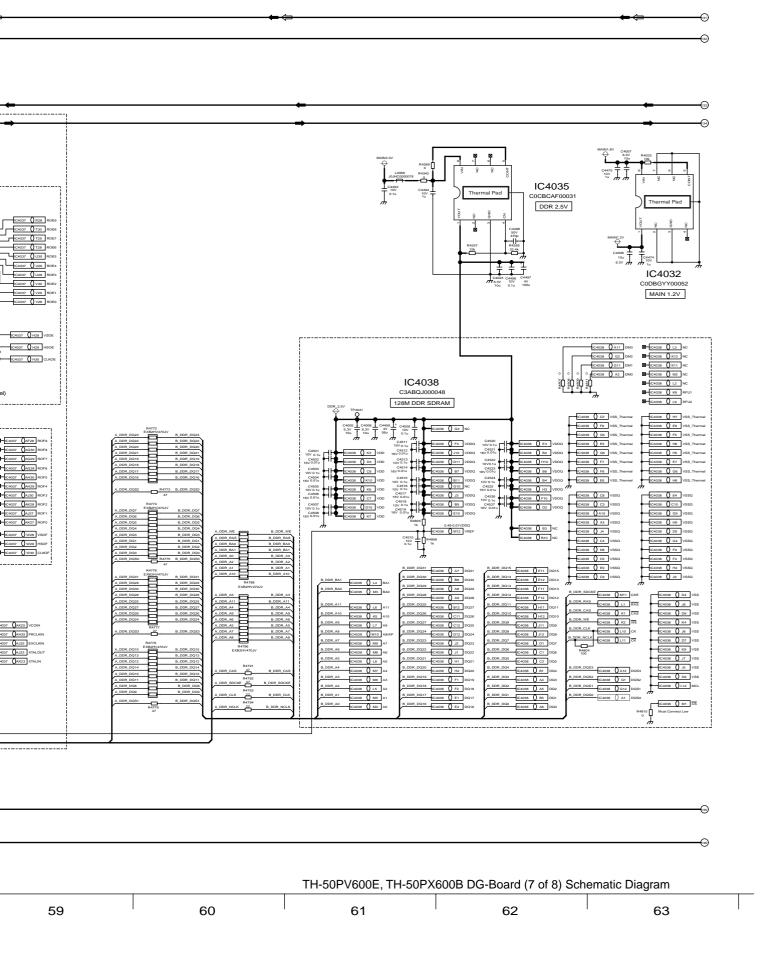


14.28. DG-Board (8 of 8) Schematic Diagram

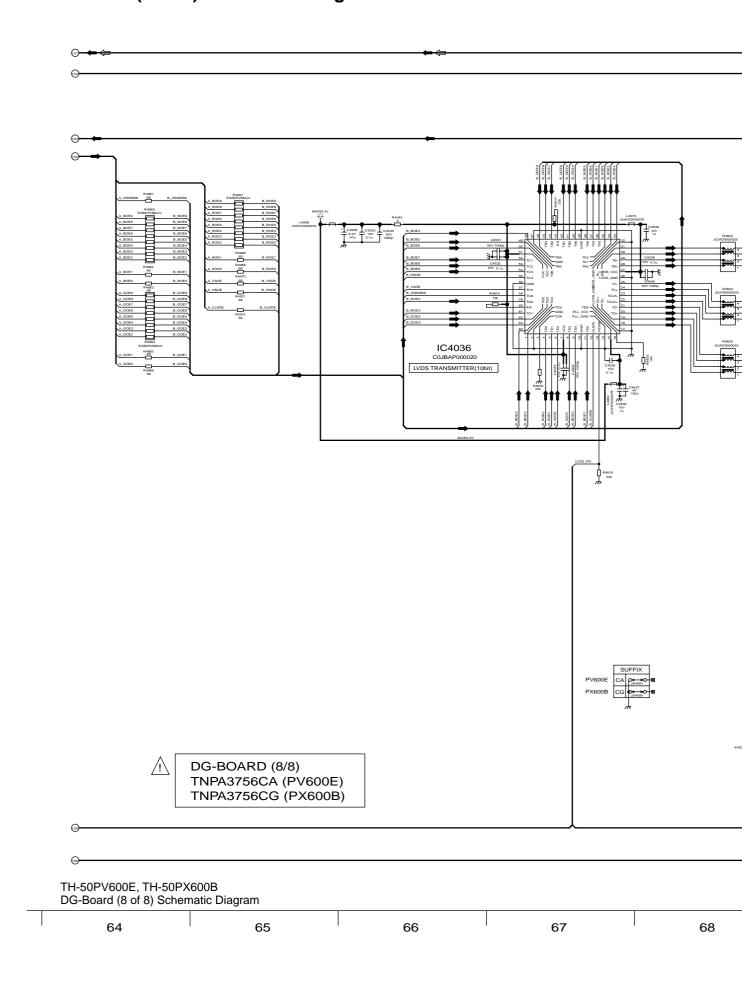




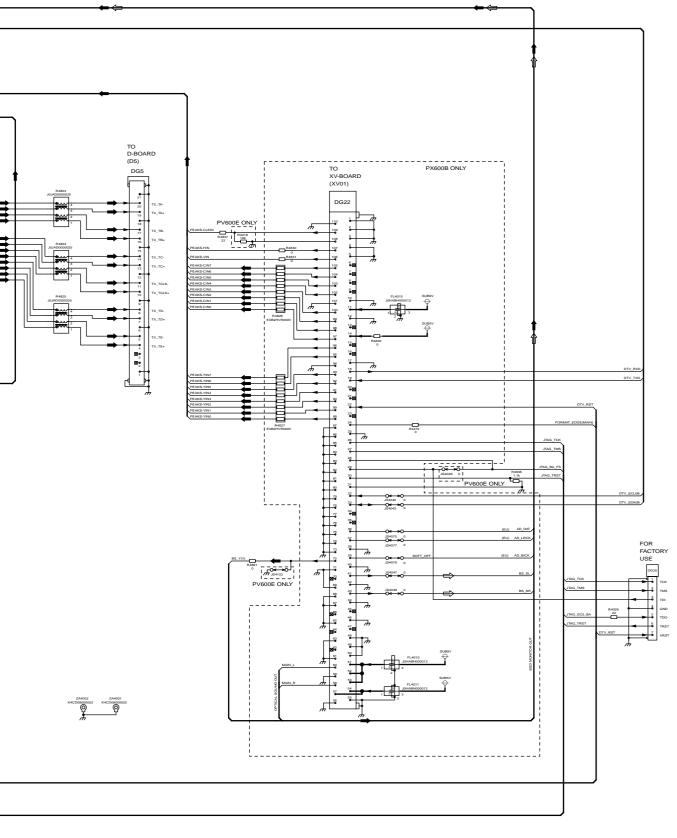




14.29. XV-Board Block Diagram (PX600B)

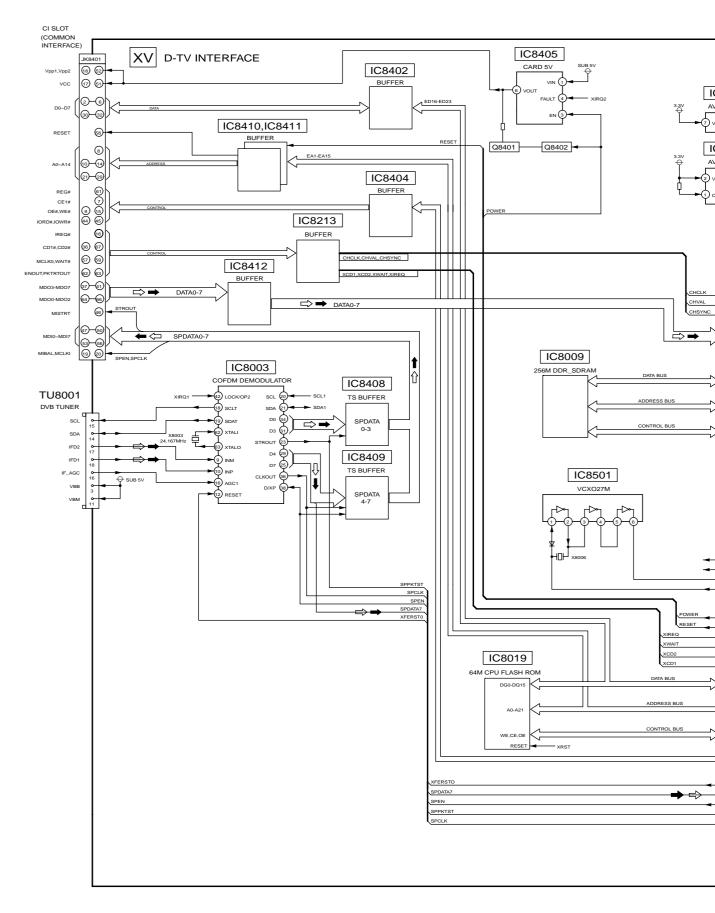


TH-50PX600B XV-Board Block Diagram

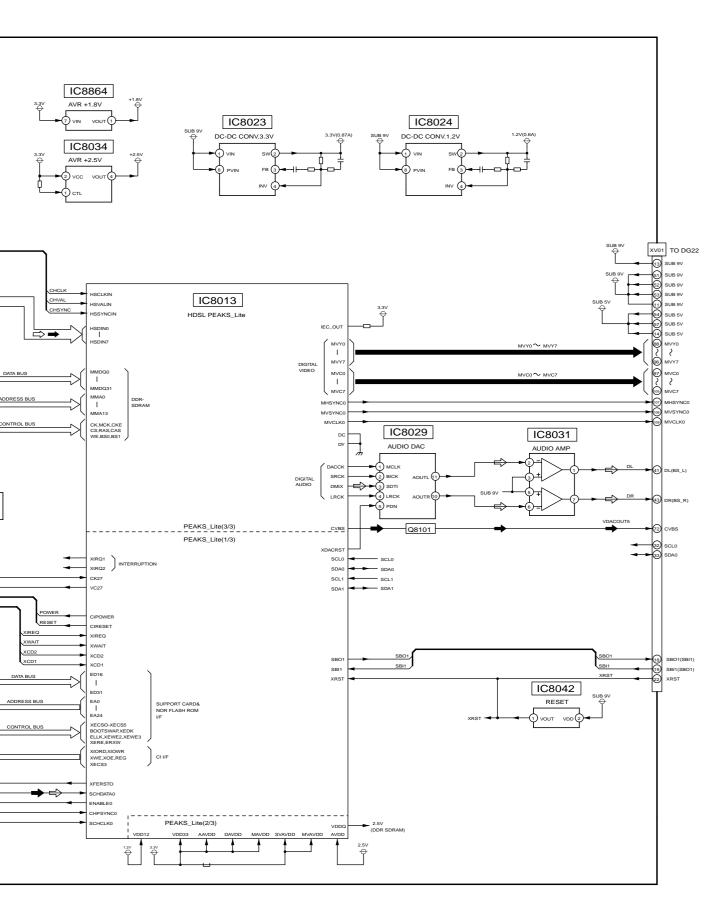


TH-50PX600B XV-Board Block Diagram

14.30. XV-Board (1 of 5) Schematic Diagram (PX600B)

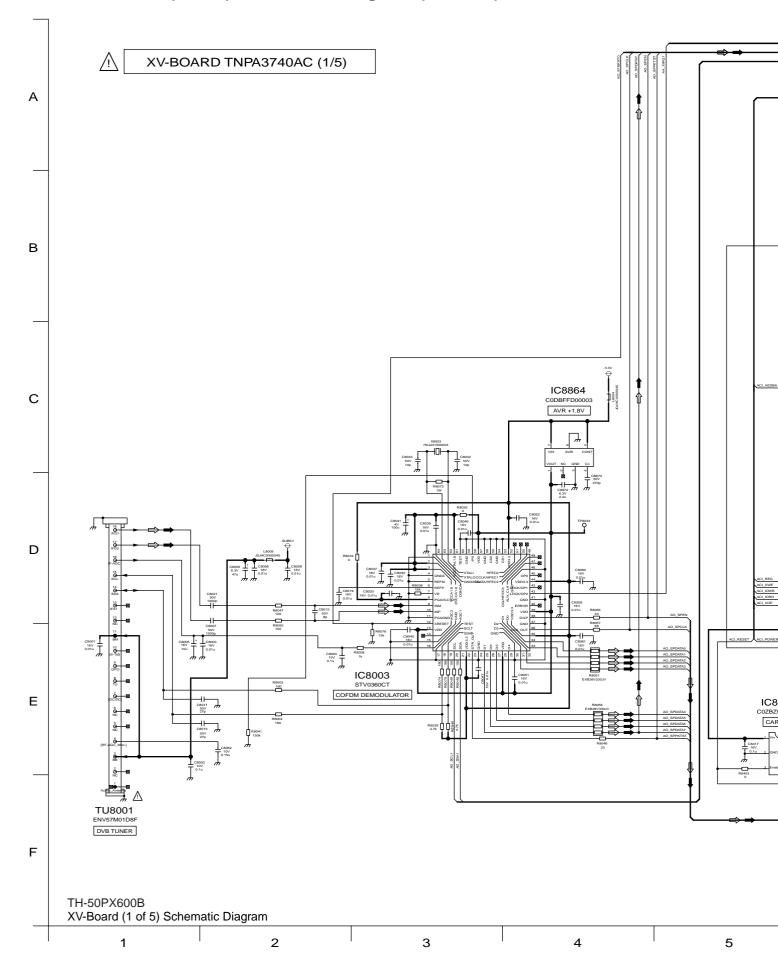





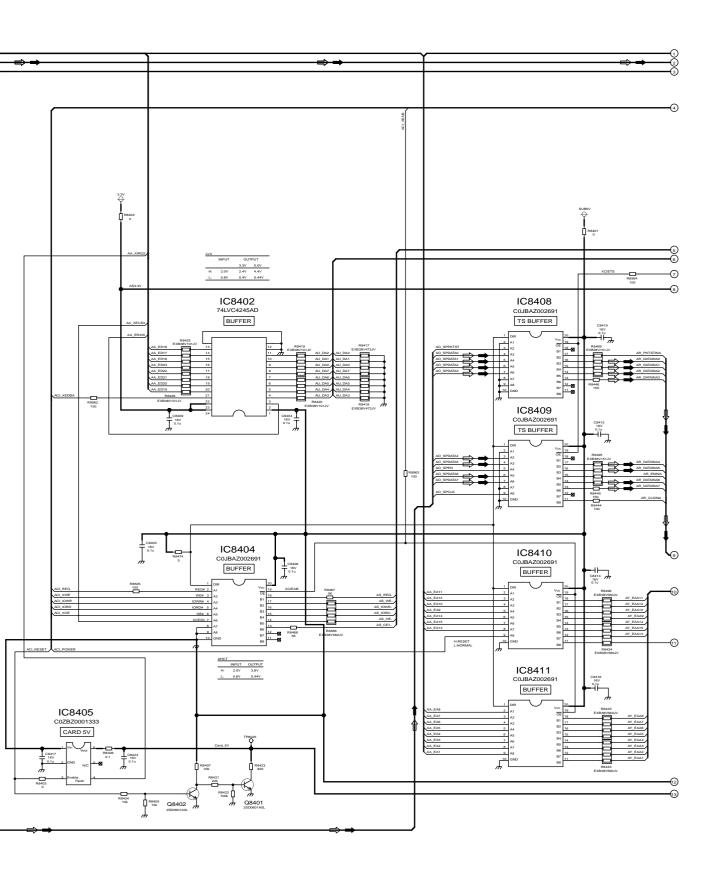




14.31. XV-Board (2 of 5) Schematic Diagram (PX600B)

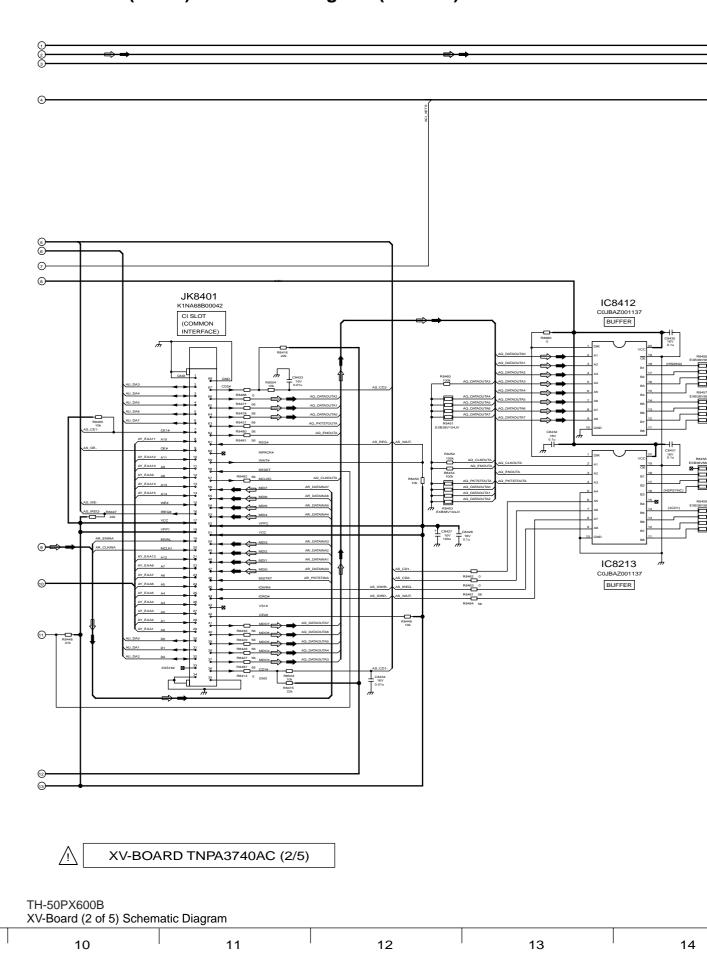


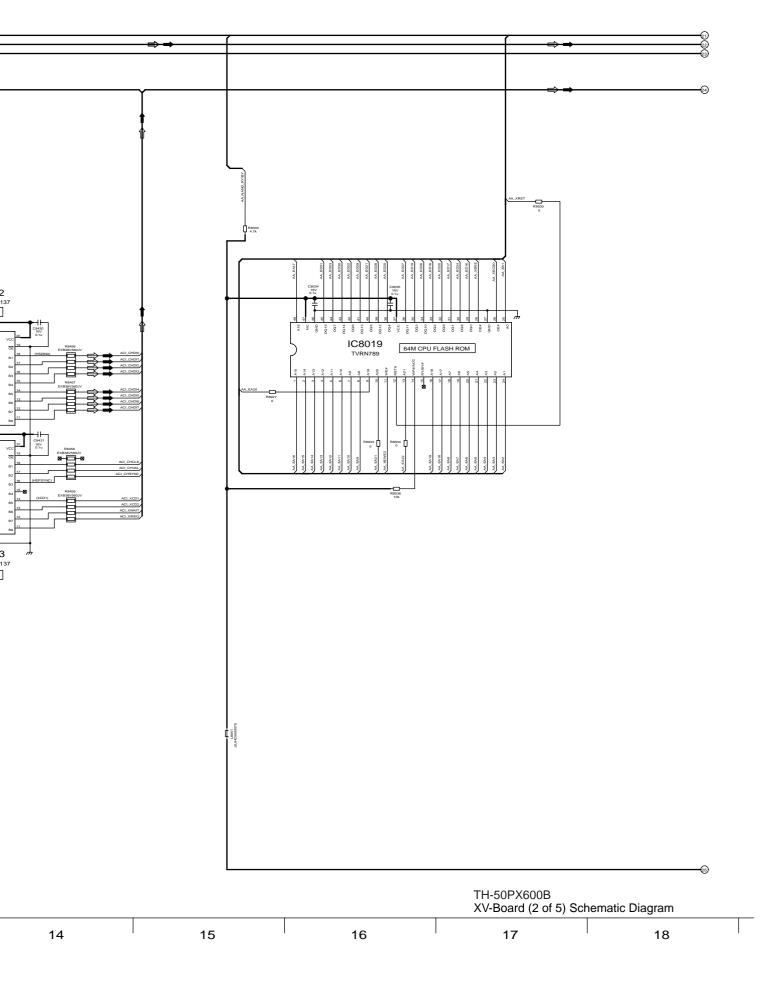


14.32. XV-Board (3 of 5) Schematic Diagram (PX600B)

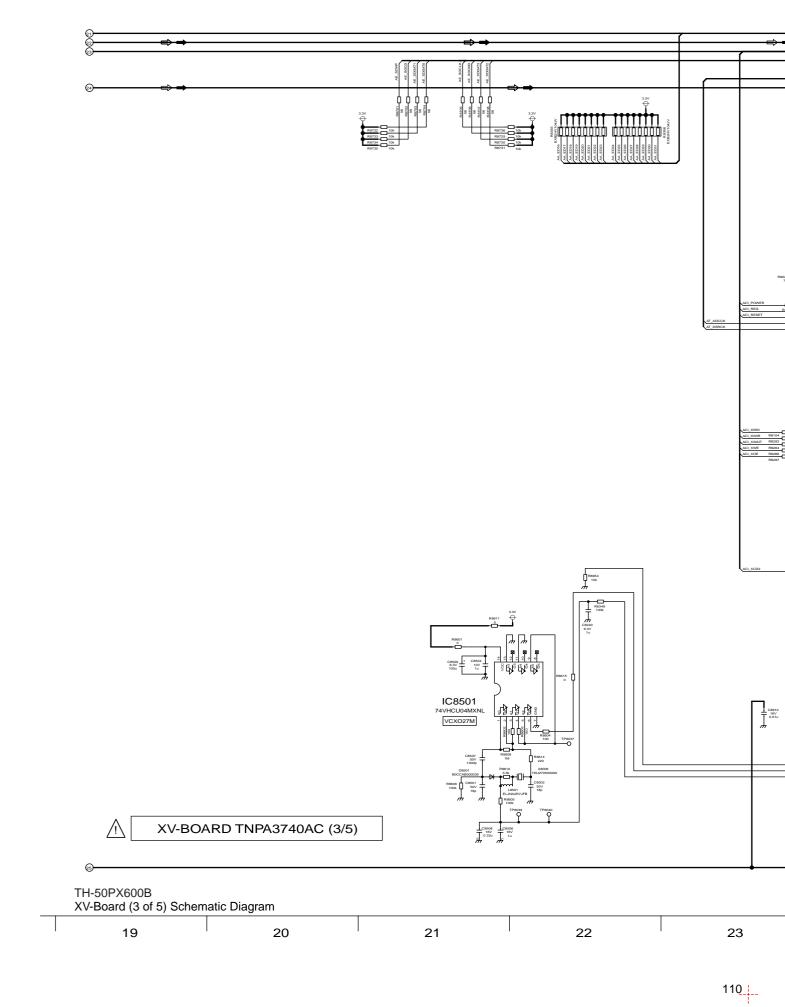





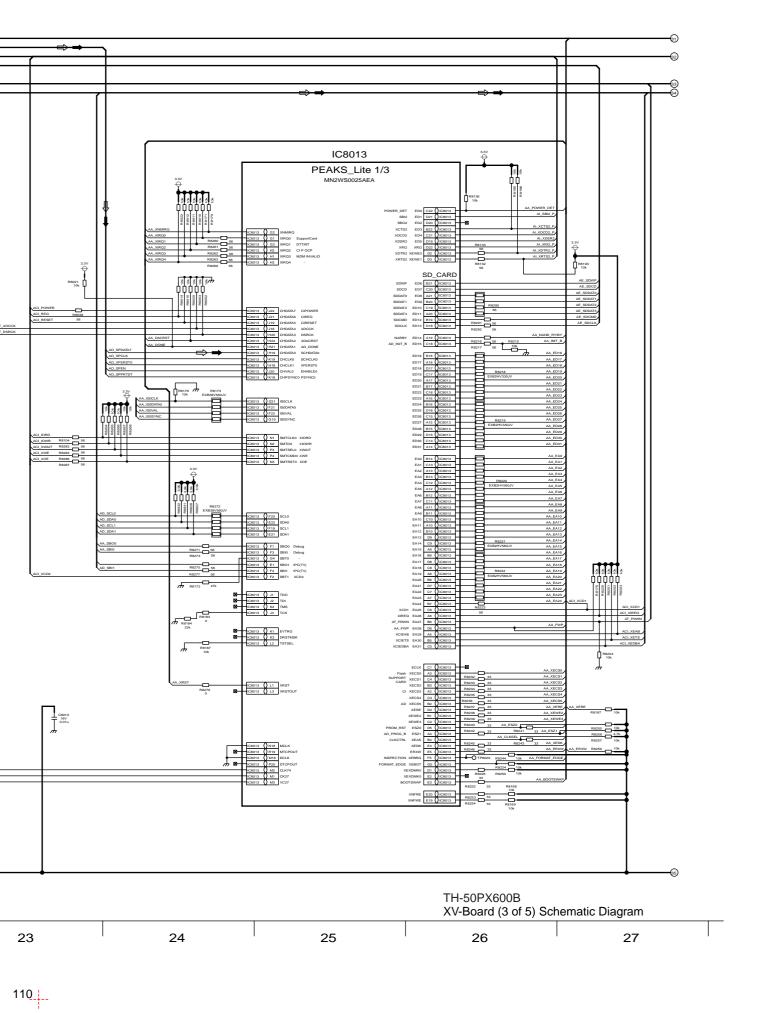


14.33. XV-Board (4 of 5) Schematic Diagram (PX600B)



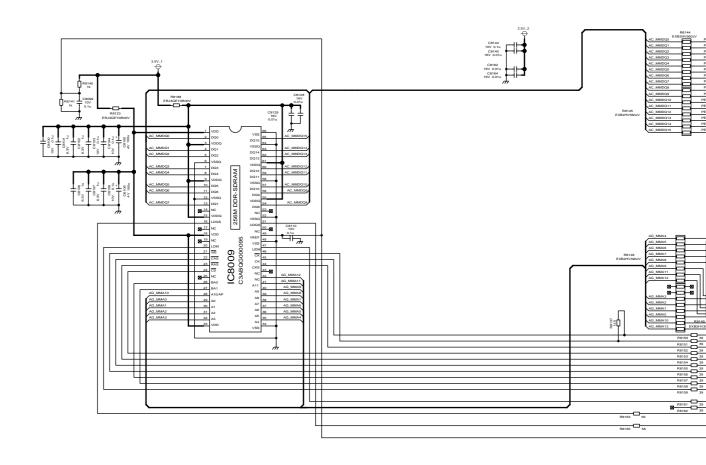


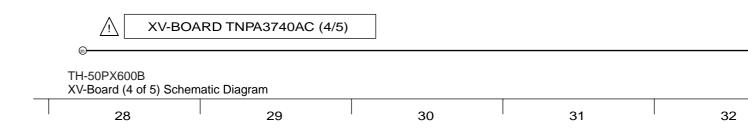




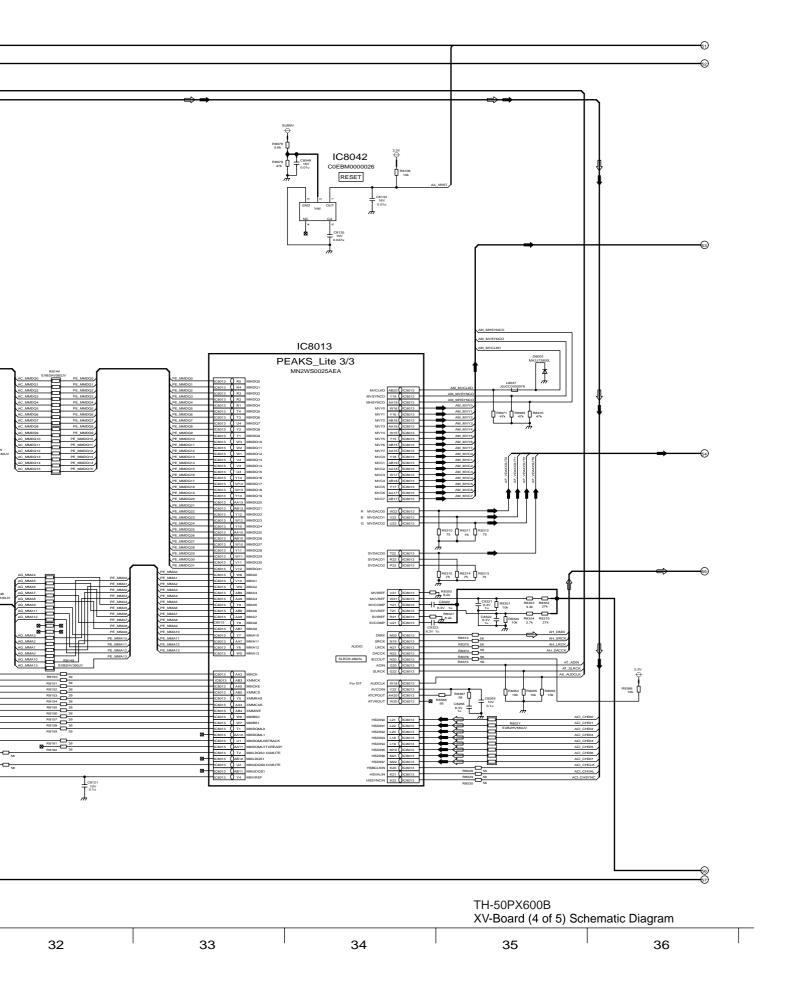


14.34. XV-Board (5 of 5) Schematic Diagram (PX600B)

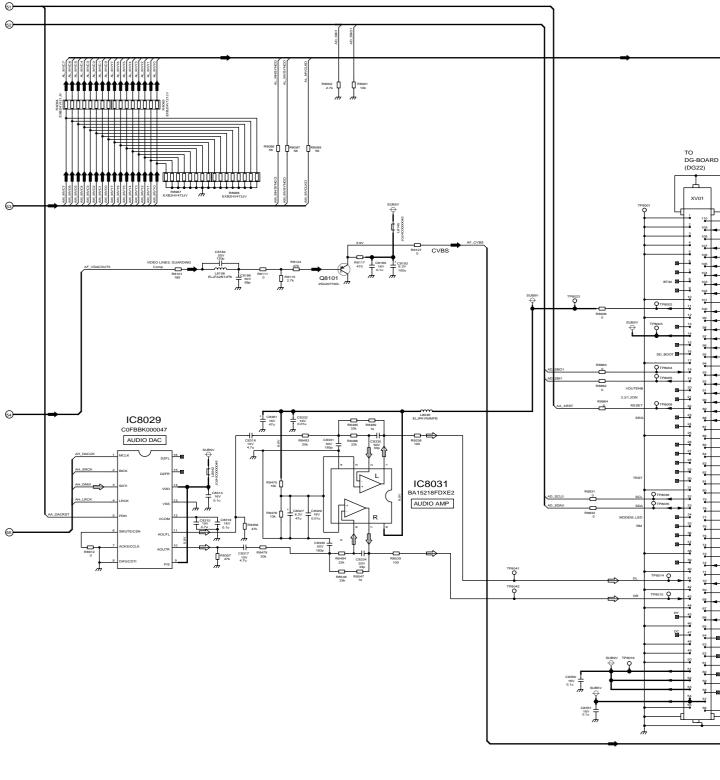

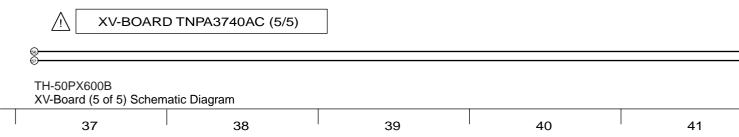




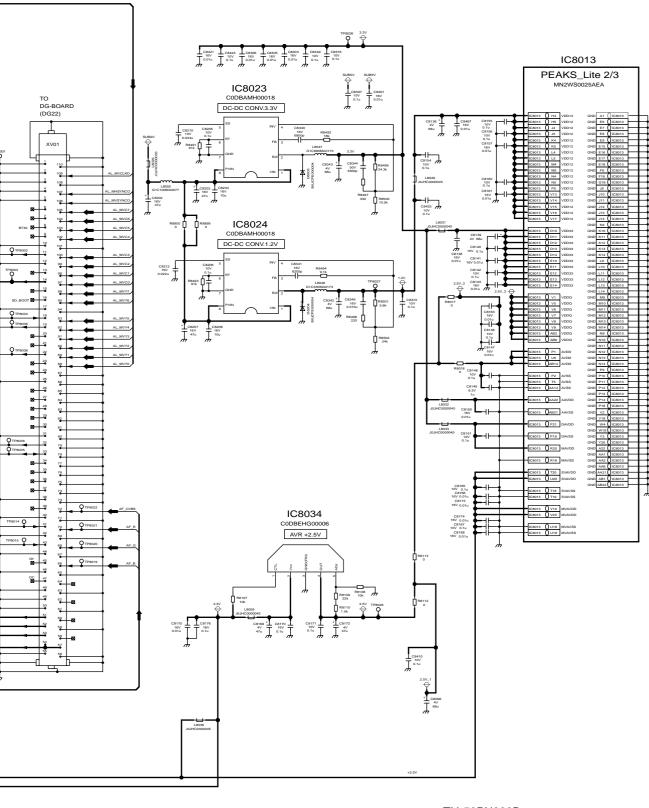


TH-50PX600B XV-Board (5 of 5) Schematic Diagram
41 42 43 44 45

14.35. D-Board (1 of 2) Block Diagram

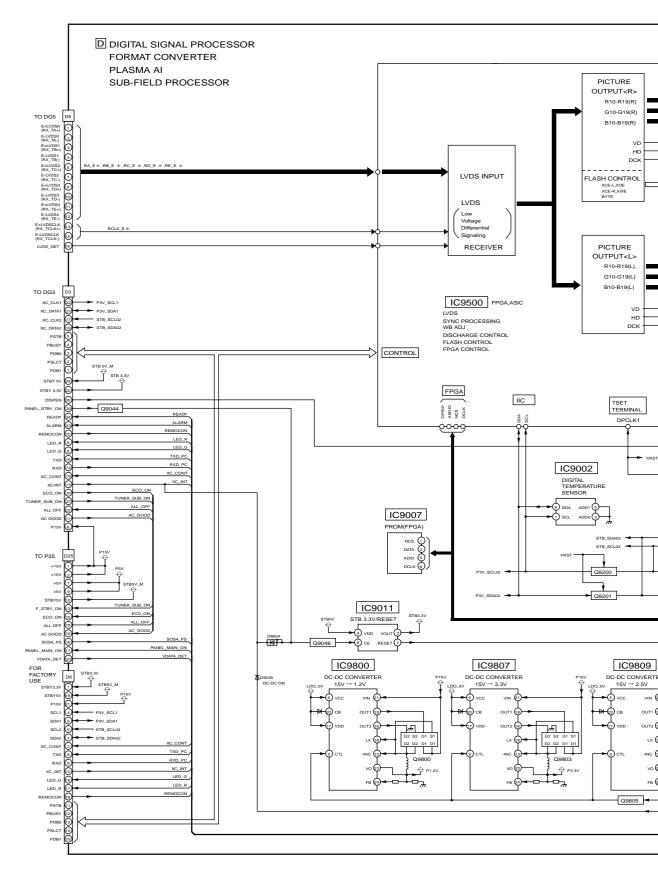


TH-50PV600E, TH-50PX600B D-Board (1 of 2) Block Diagram



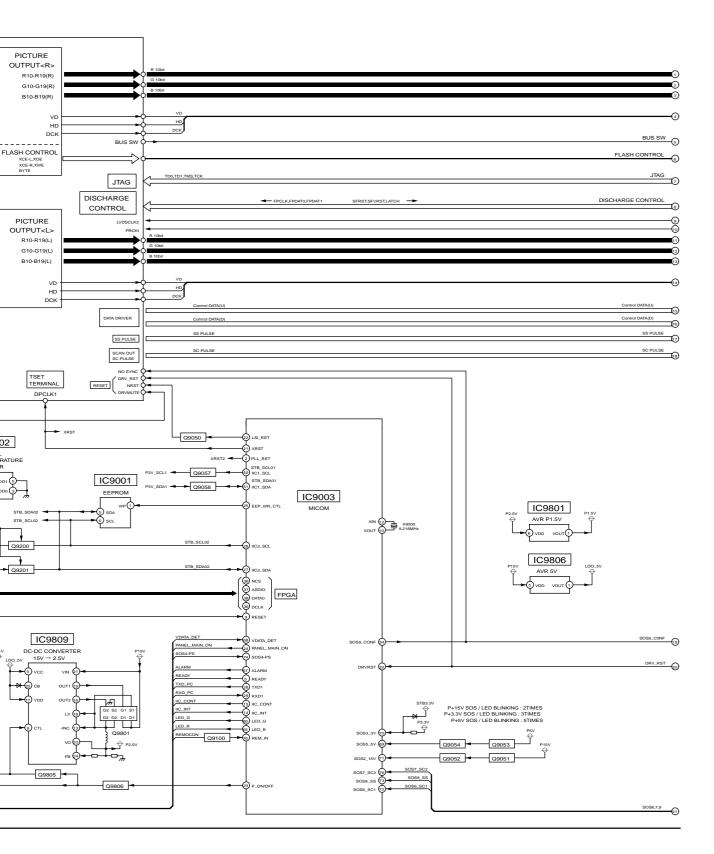


TH-50PV600E, TH-50PX600B D-Board (1 of 2) Block Diagram

14.36. D-Board (2 of 2) Block Diagram

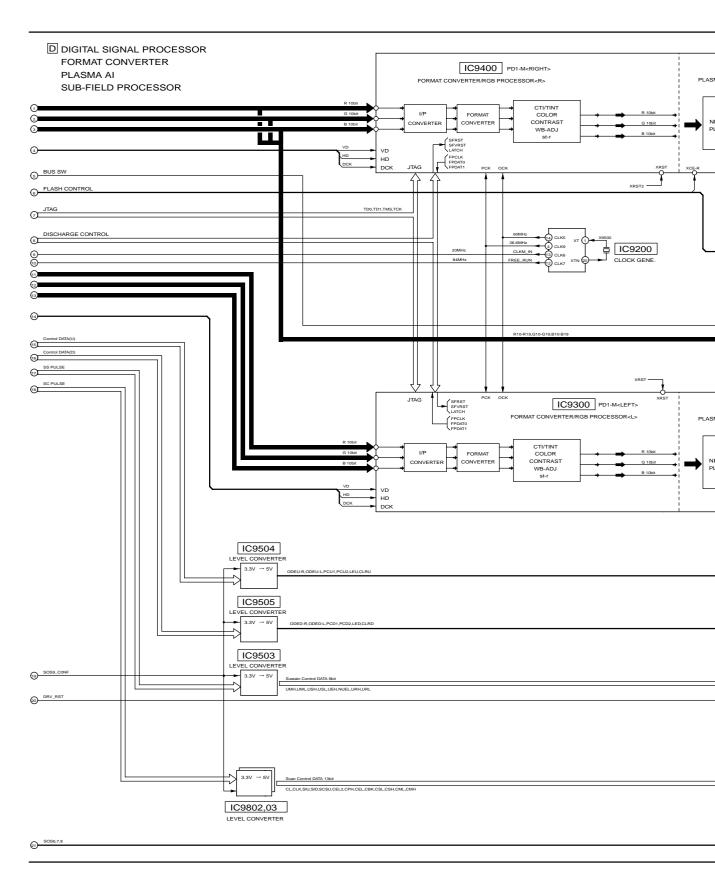


TH-50PV600E, TH-50PX600B D-Board (2 of 2) Block Diagram

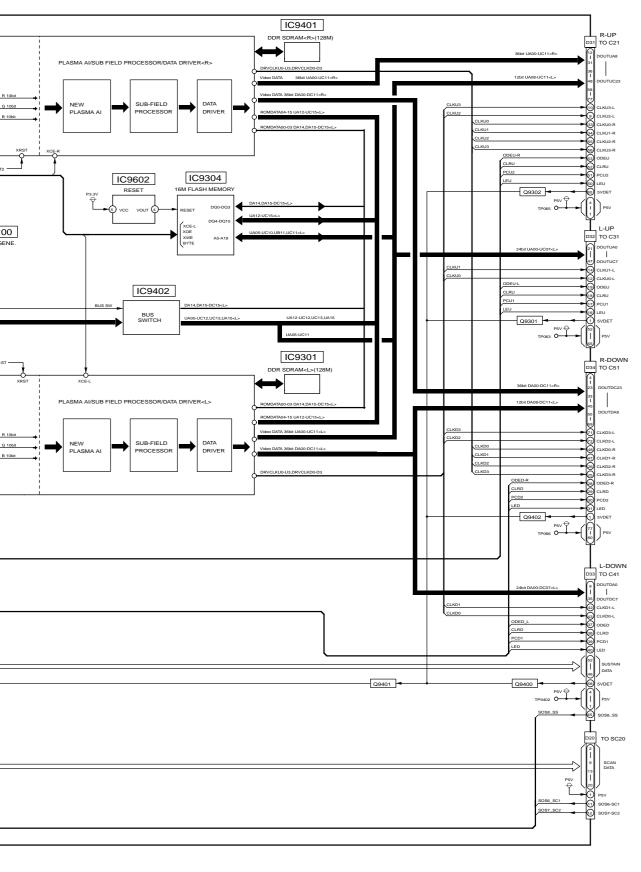


TH-50PV600E, TH-50PX600B D-Board (2 of 2) Block Diagram


14.37. D-Board (1 of 8) Schematic Diagram

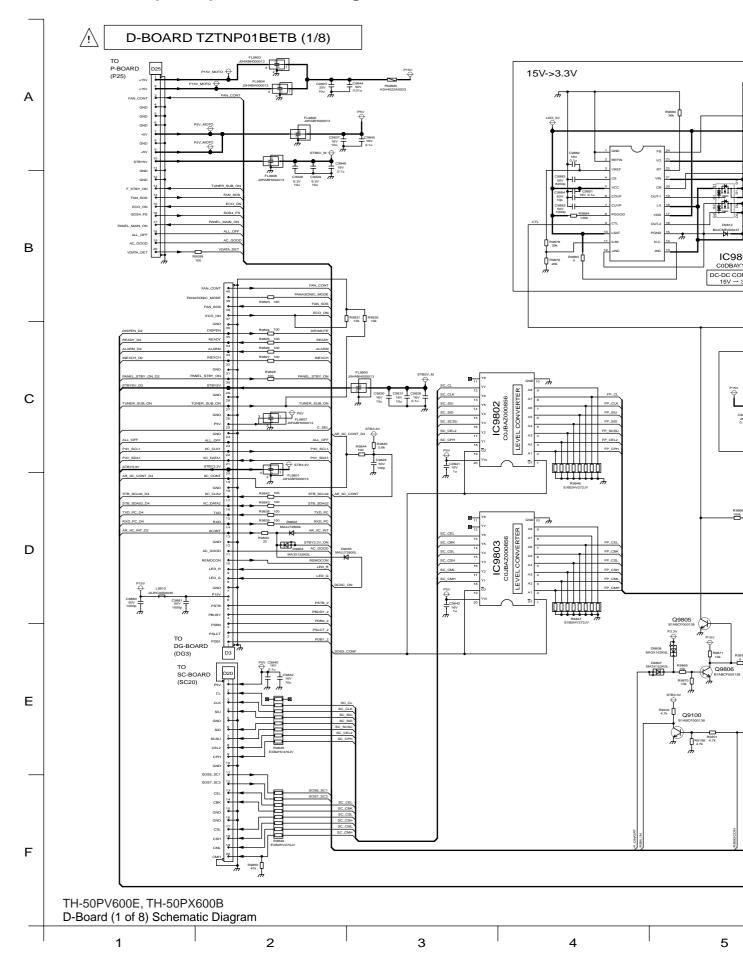



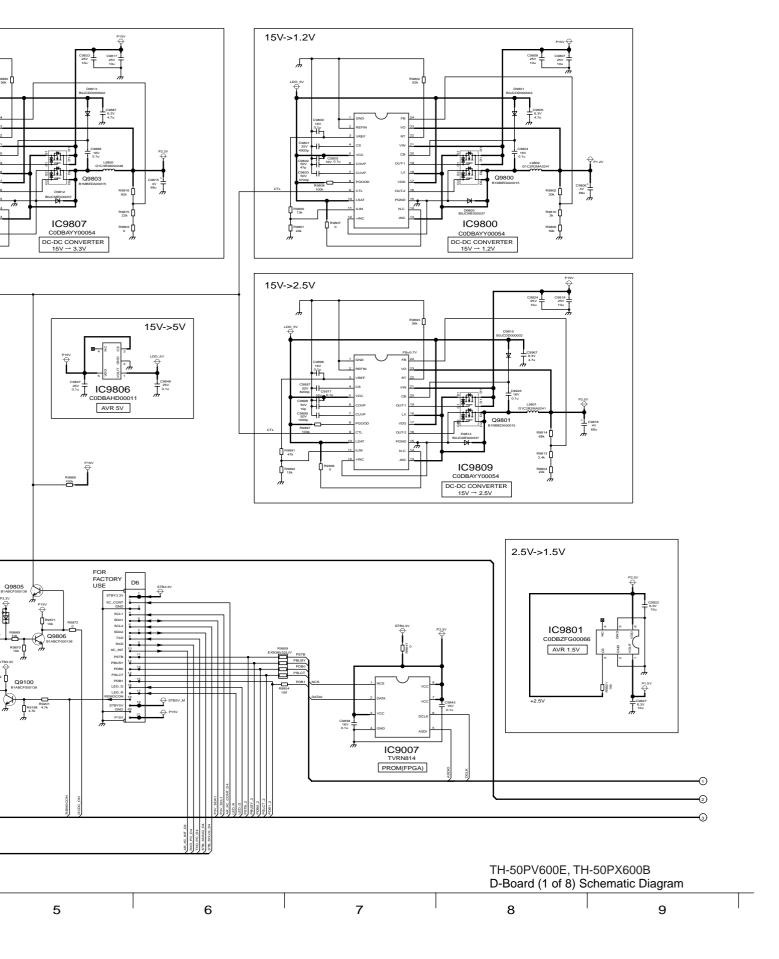


14.38. D-Board (2 of 8) Schematic Diagram

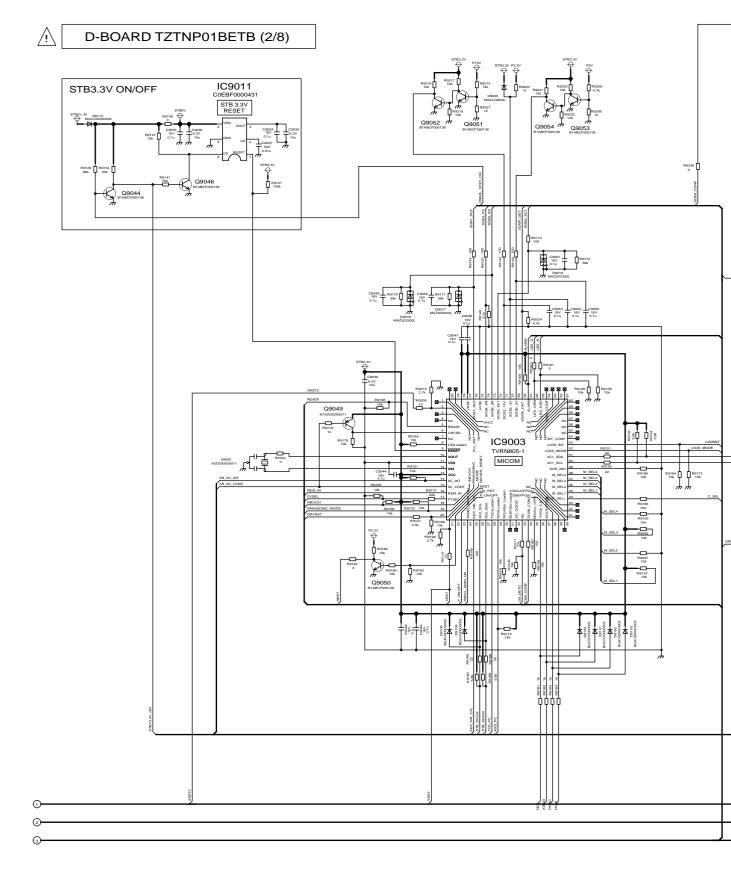






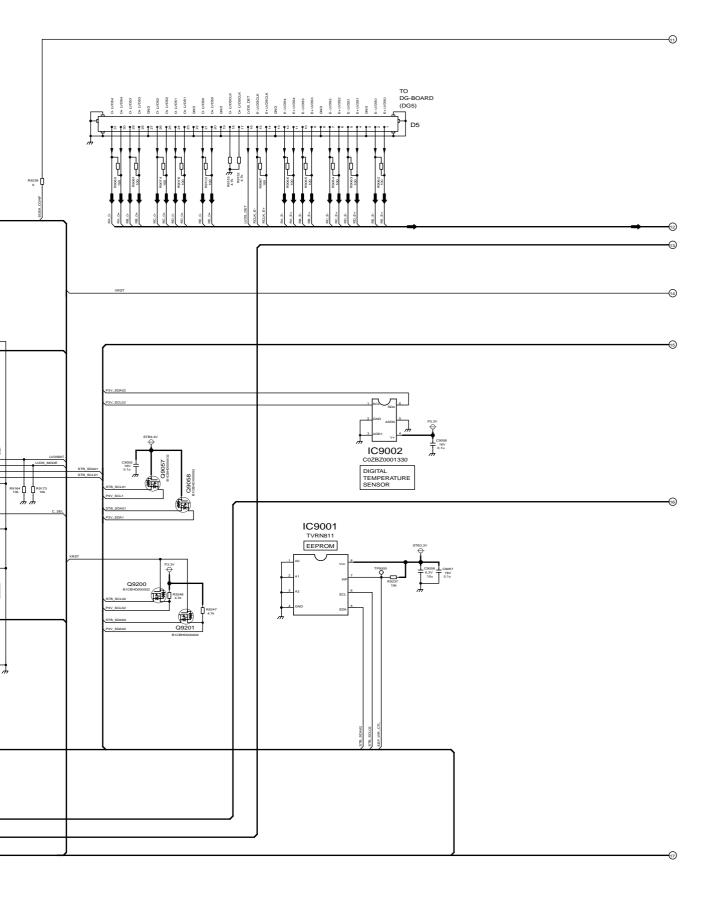




14.39. D-Board (3 of 8) Schematic Diagram

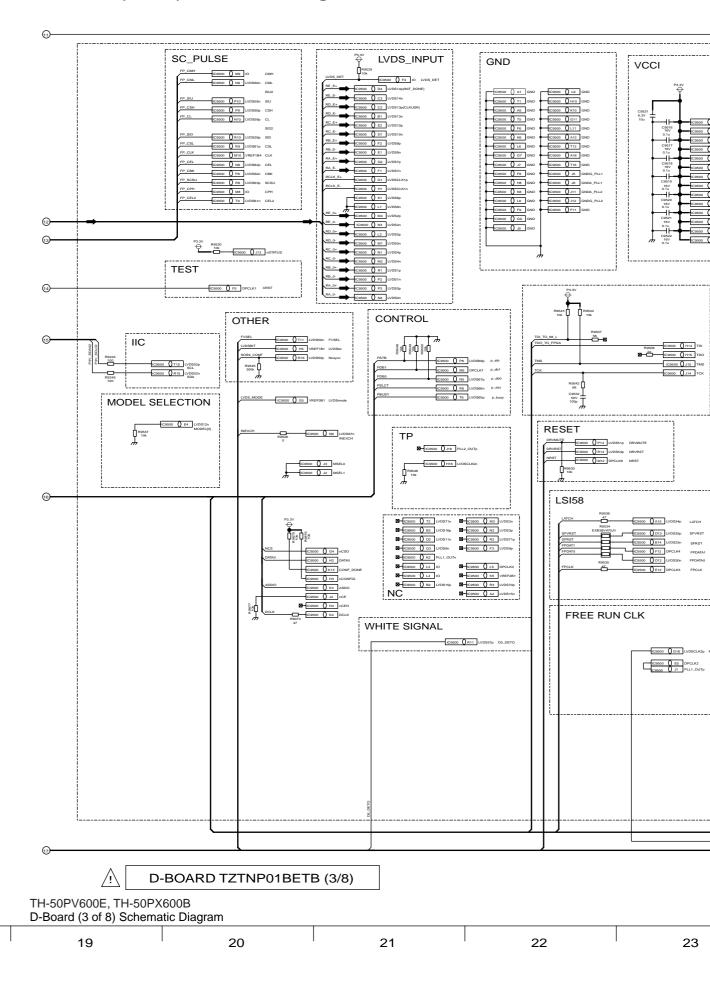




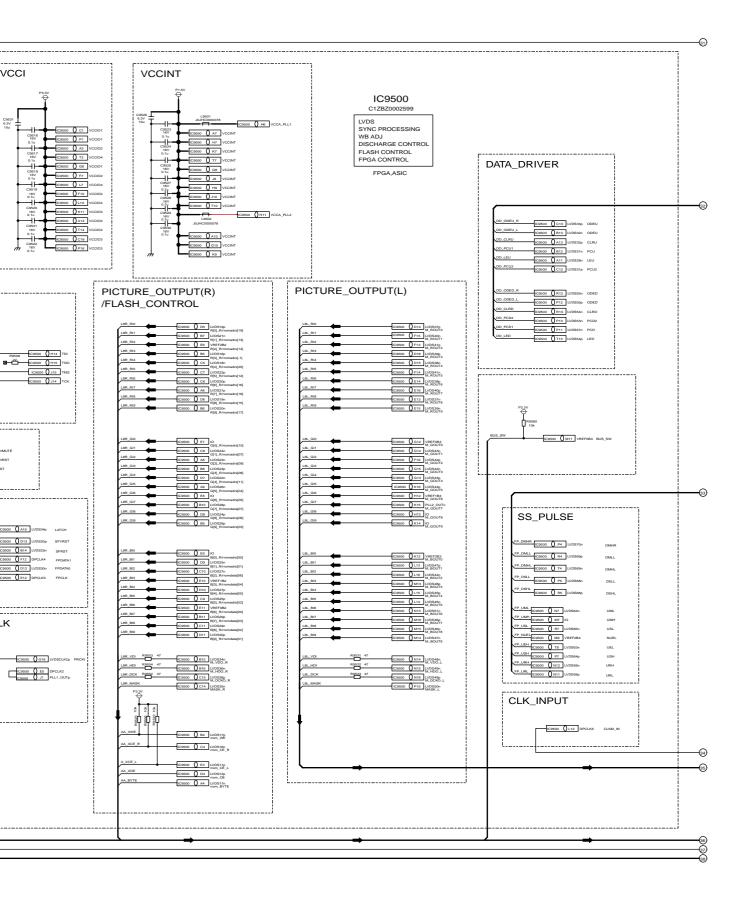


TH-50PV600E, TH-50PX600B
D-Board (3 of 8) Schematic Diagram

23 24 25 26 27


14.40. D-Board (4 of 8) Schematic Diagram

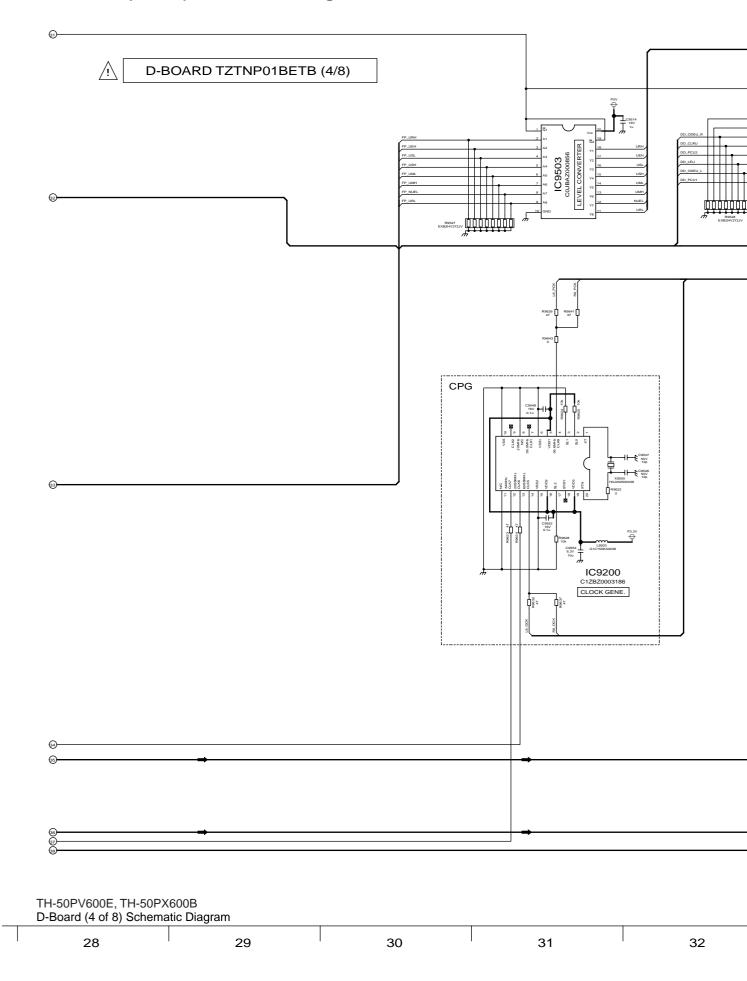




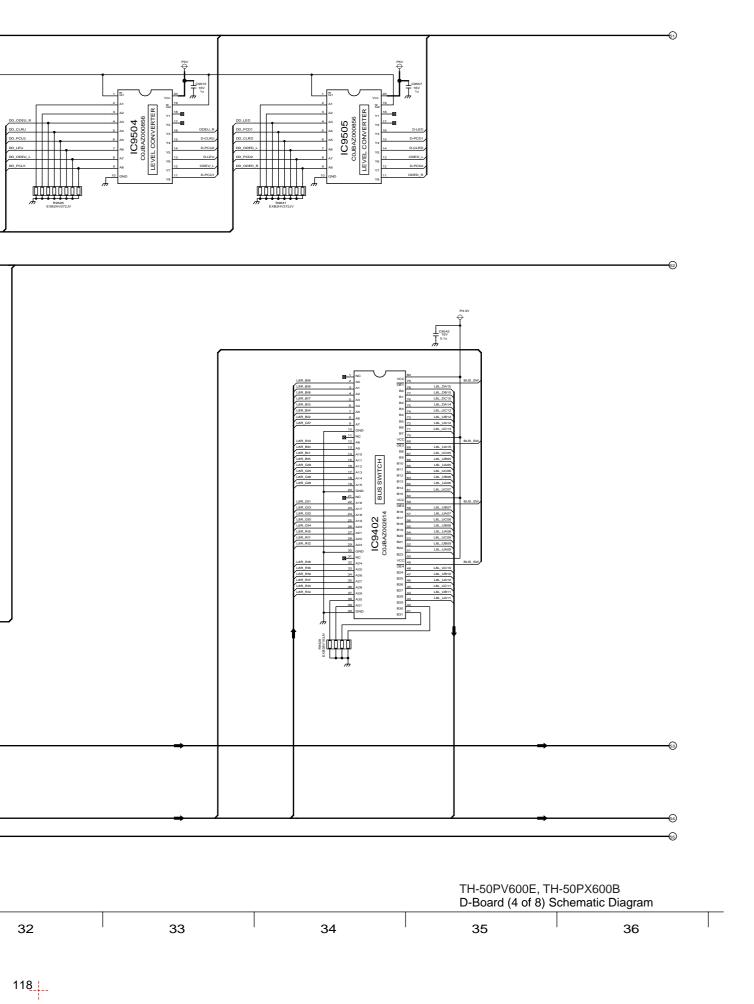



14.41. D-Board (5 of 8) Schematic Diagram

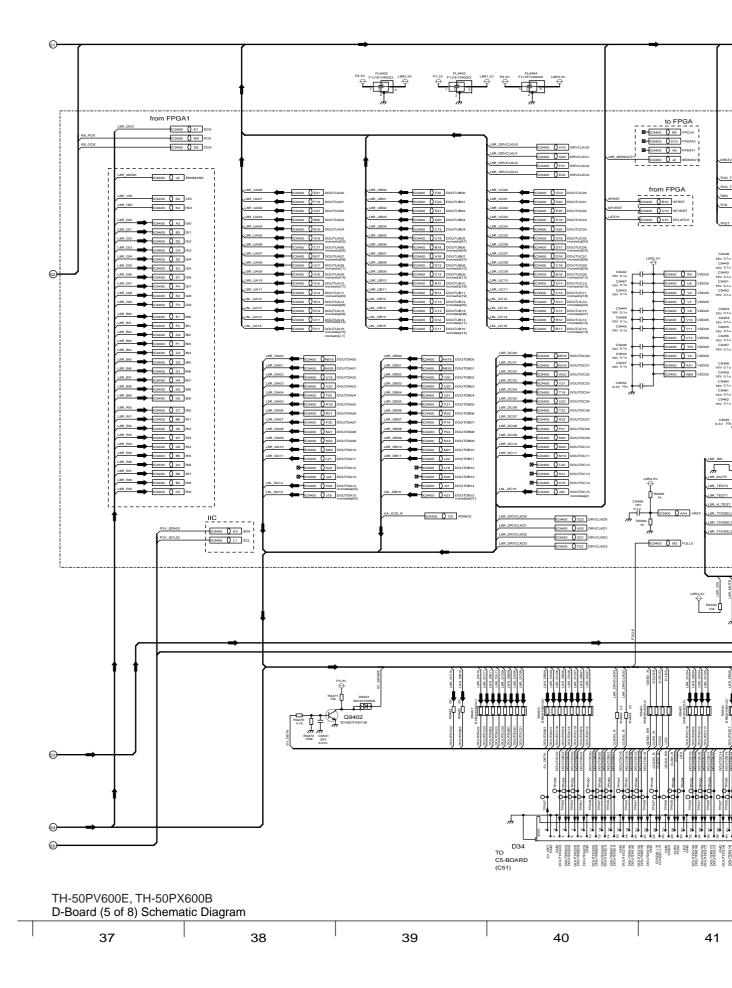

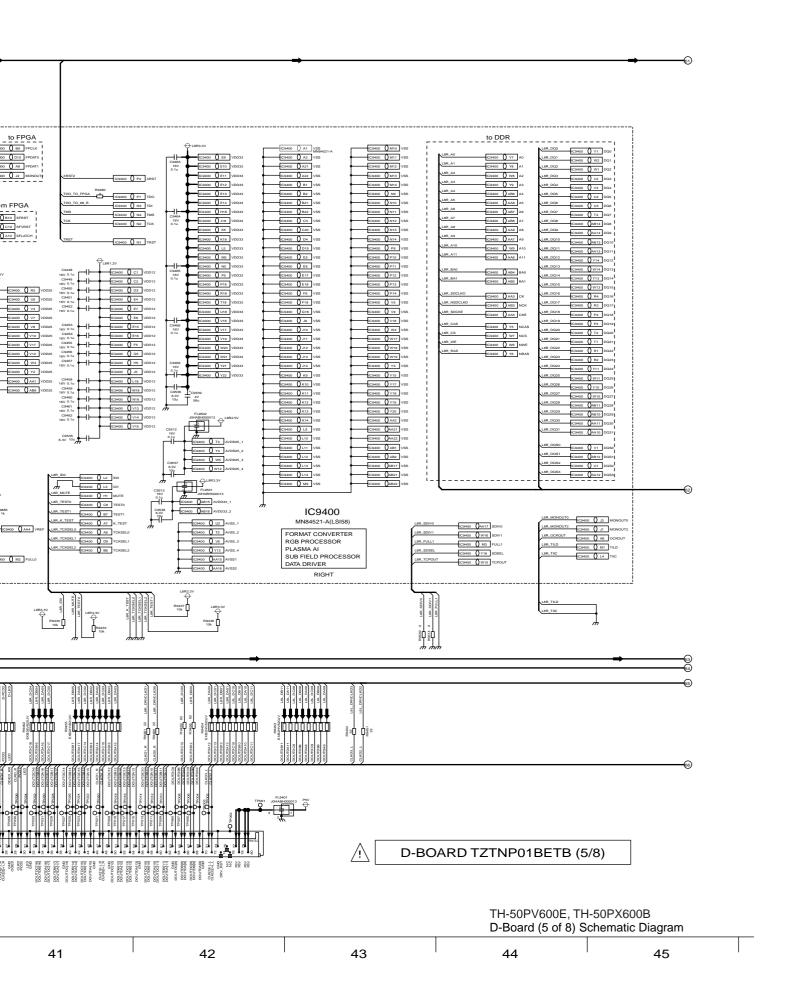



14.42. D-Board (6 of 8) Schematic Diagram

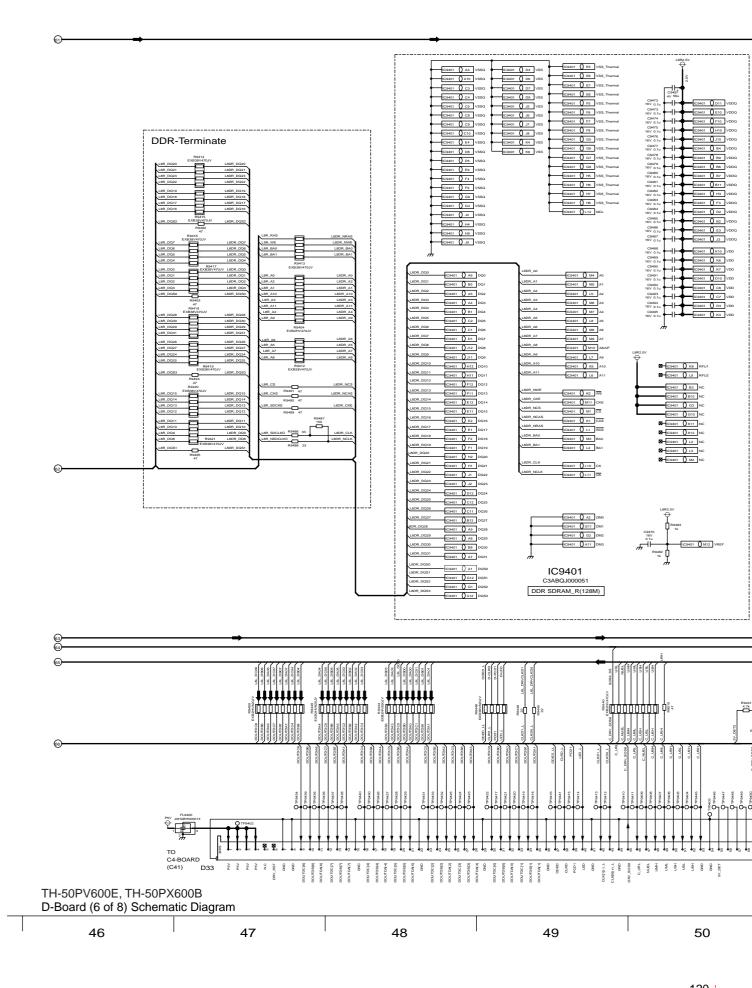


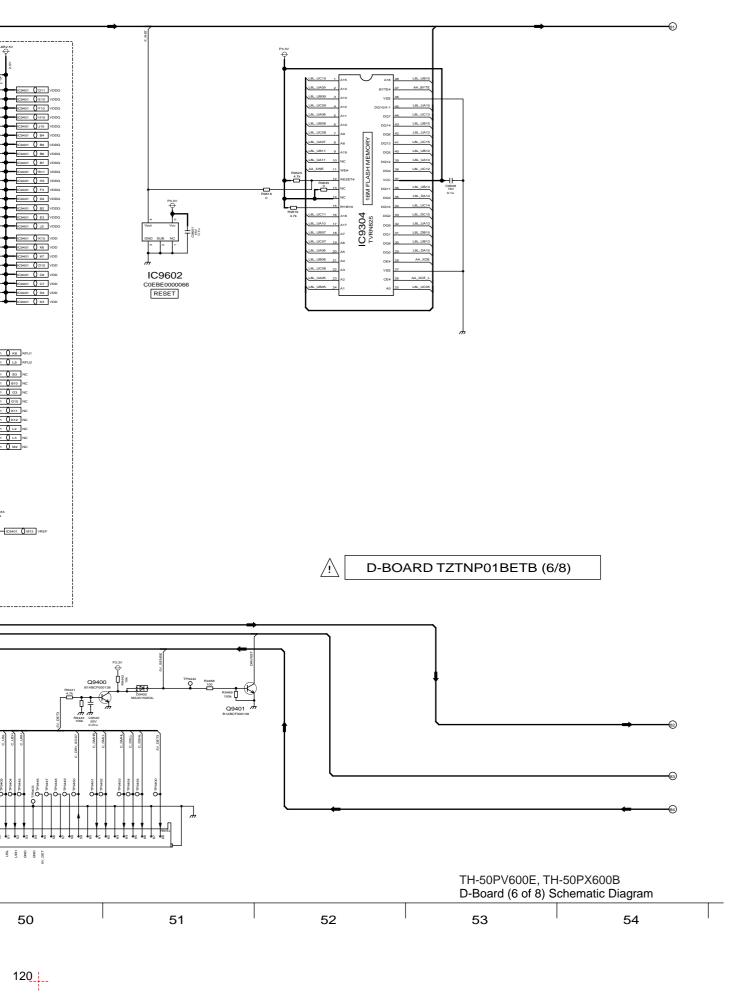


14.43. D-Board (7 of 8) Schematic Diagram

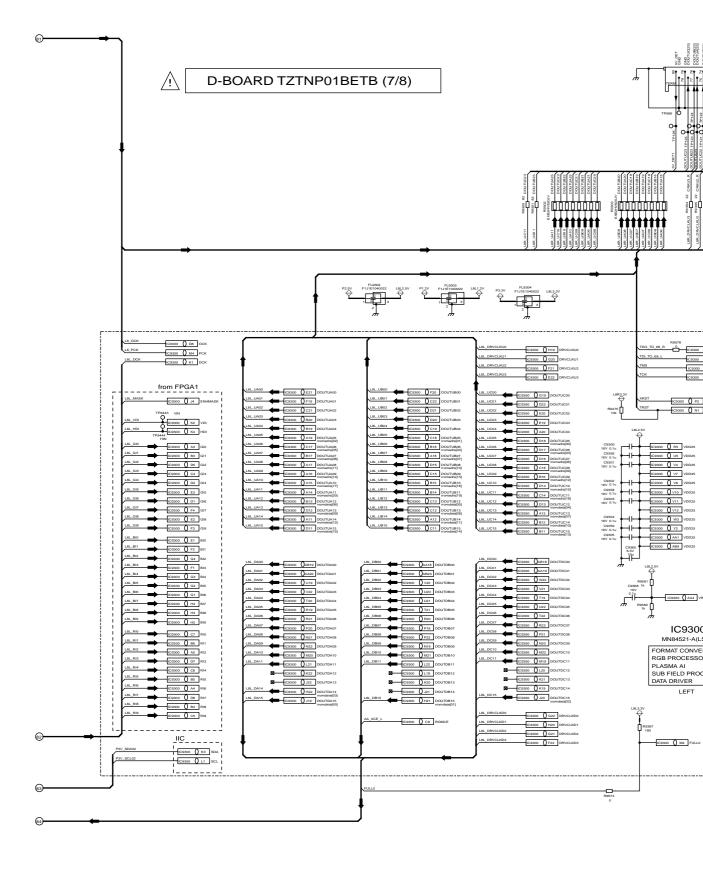




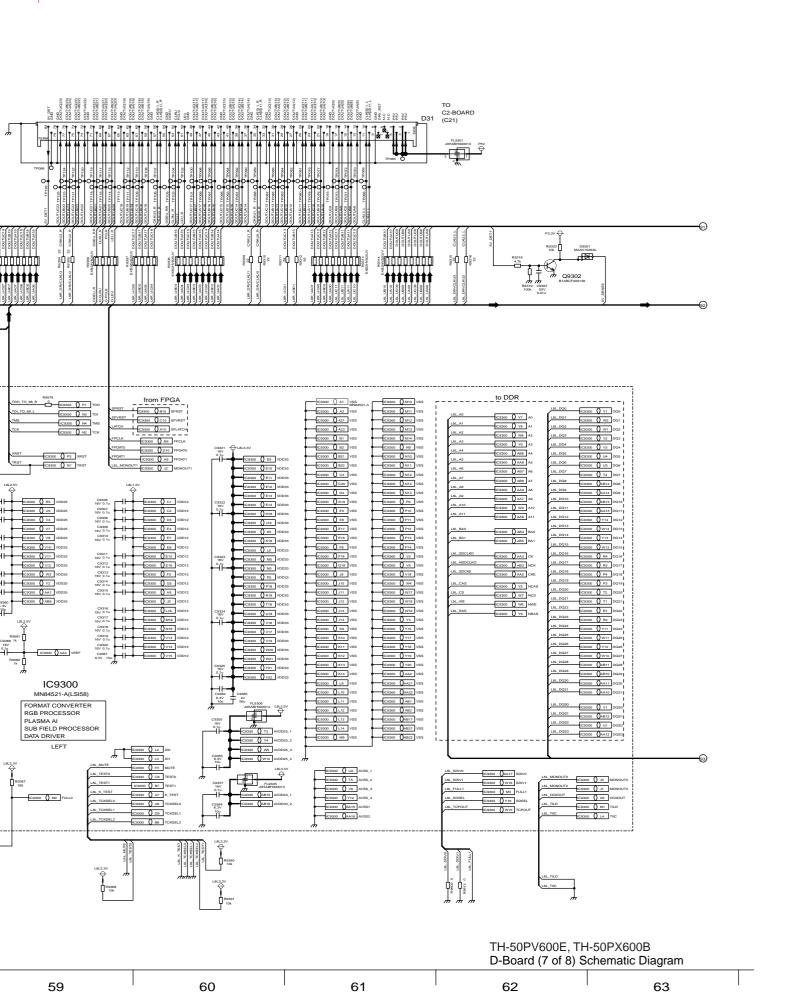


14.44. D-Board (7 of 8) Schematic Diagram

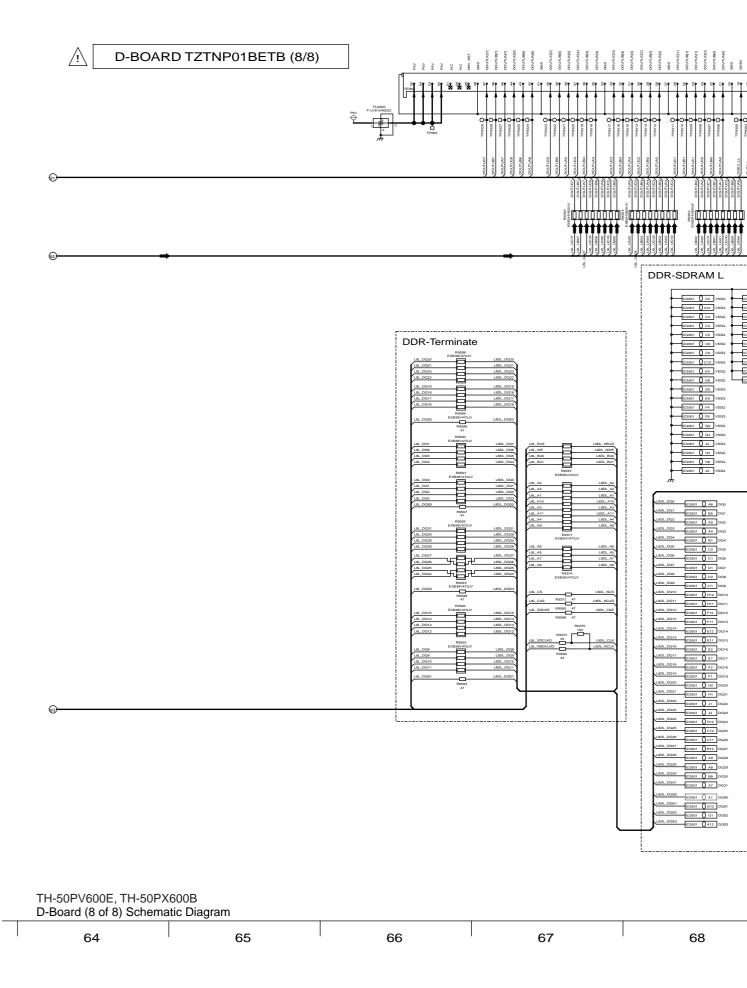





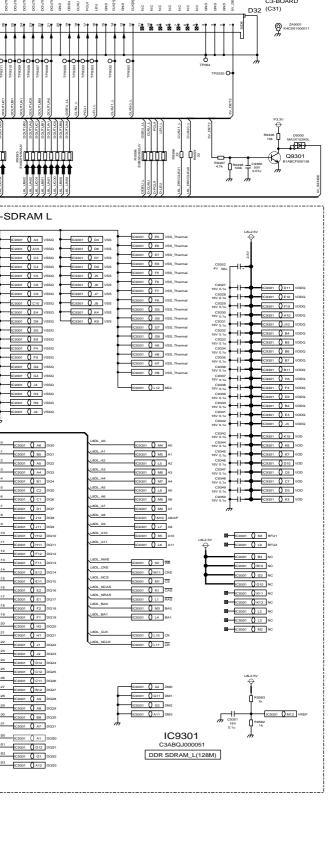




14.45. C1, C2, C5 and C6-Board Block Diagram

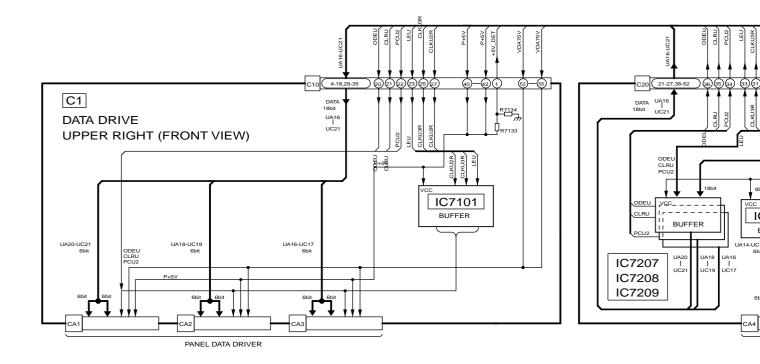


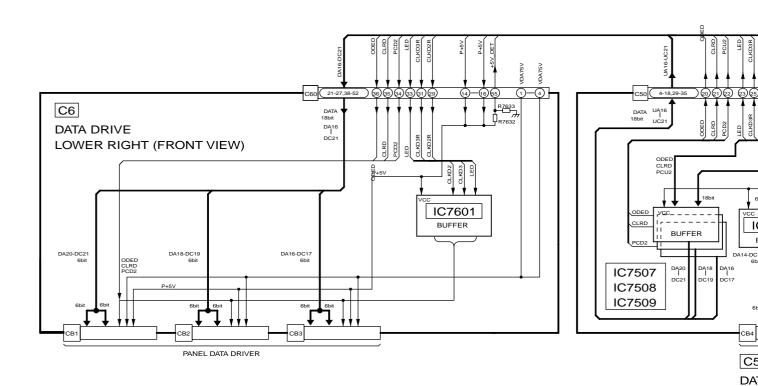

TH-50PV600E, TH-50PX600B C1, C2, C5 and C6-Board Block Diagram LO



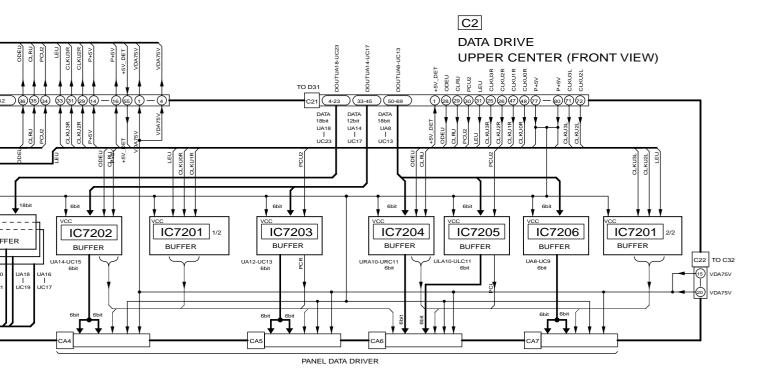


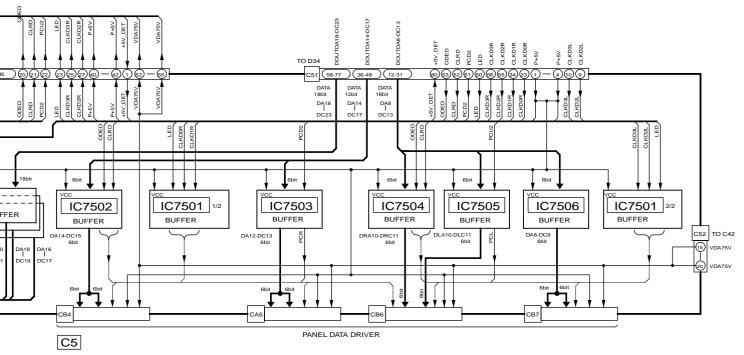

DATA DRIVE LOWER CENTER (FRONT VIEW)


TH-50PV600E, TH-50PX600B C1, C2, C5 and C6-Board Block Diagram

14.46. C3, C4, SS, S, SS2 and SS3-Board Block Diagram

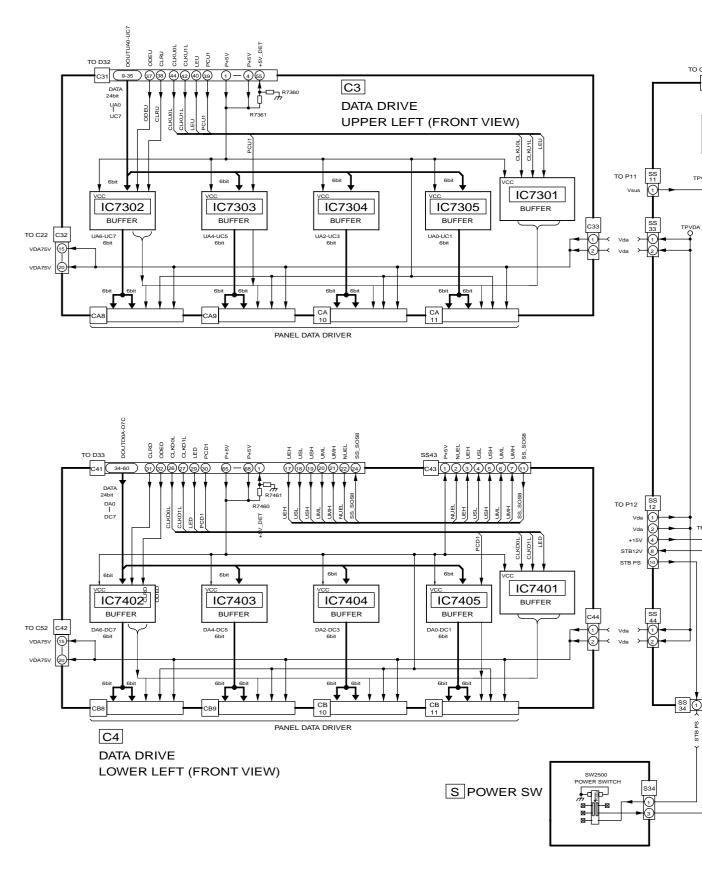

TH-50PV600B, TH-50PX600E C3, C4, SS, S, SS2 and SS3-Board Block Diagram



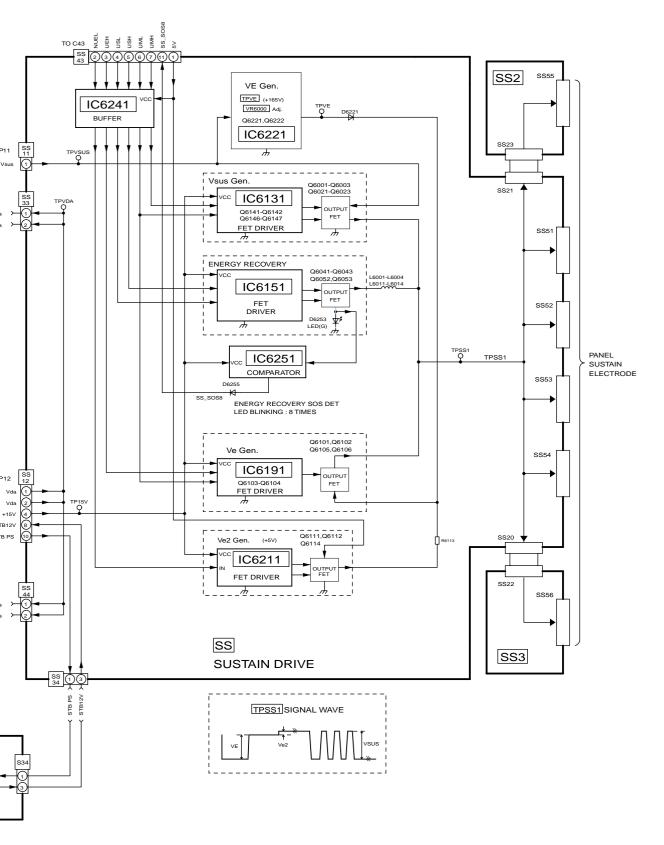


TH-50PV600B, TH-50PX600E C3, C4, SS, S, SS2 and SS3-Board Block Diagram

14.47. C1-Board (1 of 2) Schematic Diagram






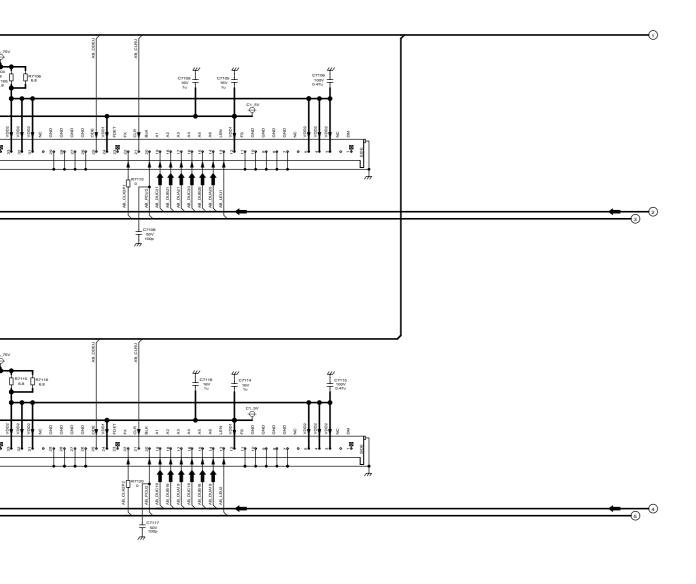





14.48. C1-Board (2 of 2) Schematic Diagram


C1-BOARD TXNC11BETB (2/2)

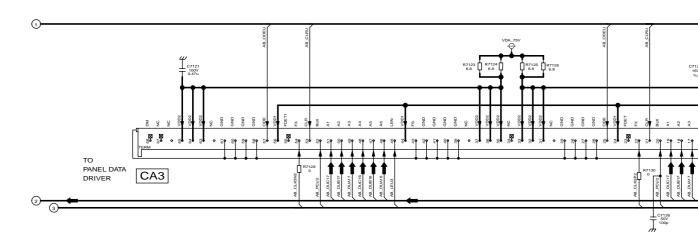









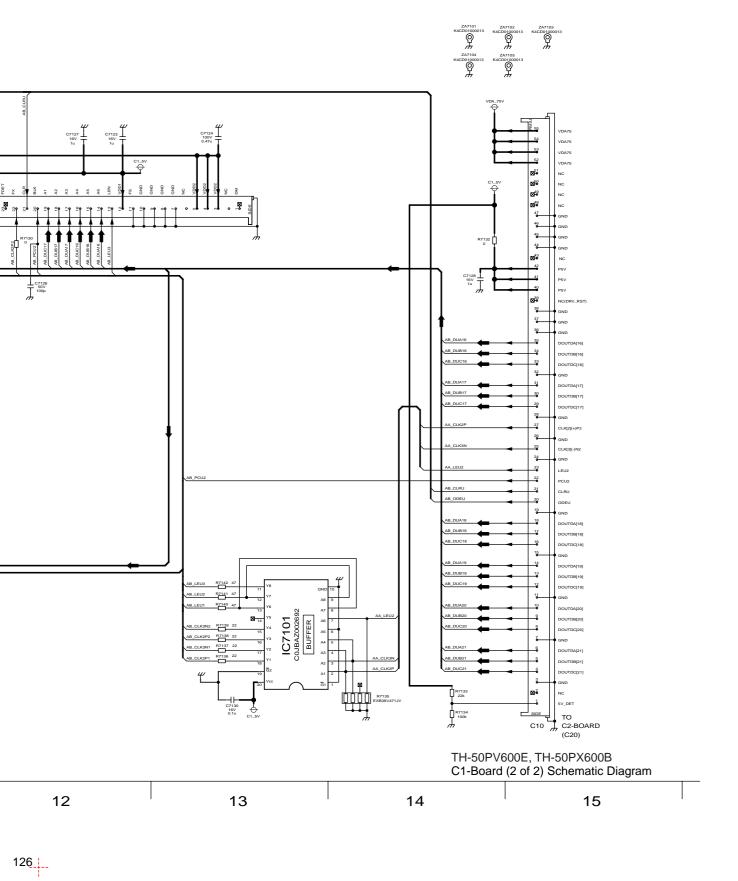


14.49. C2-Board (1 of 3) Schematic Diagram

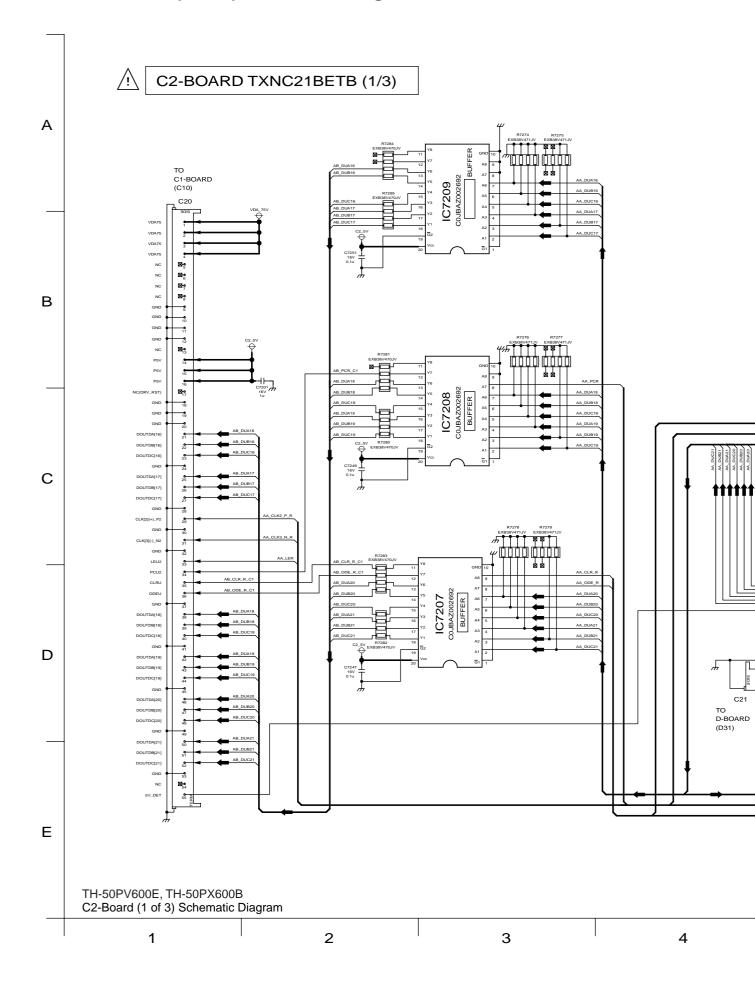




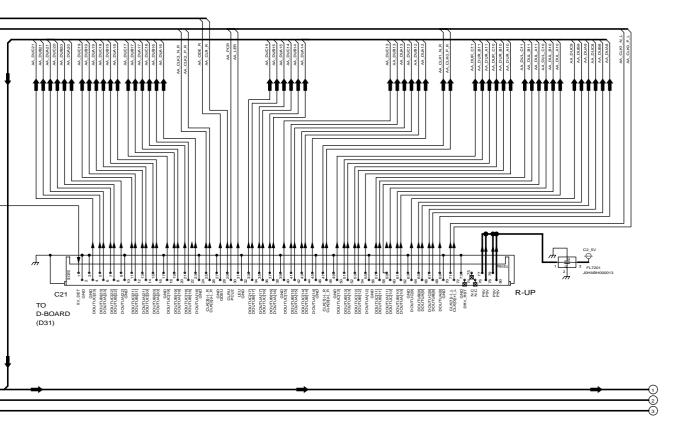





14.50. C2-Board (2 of 3) Schematic Diagram


C2-BOARD TXNC21BETB (2/3)

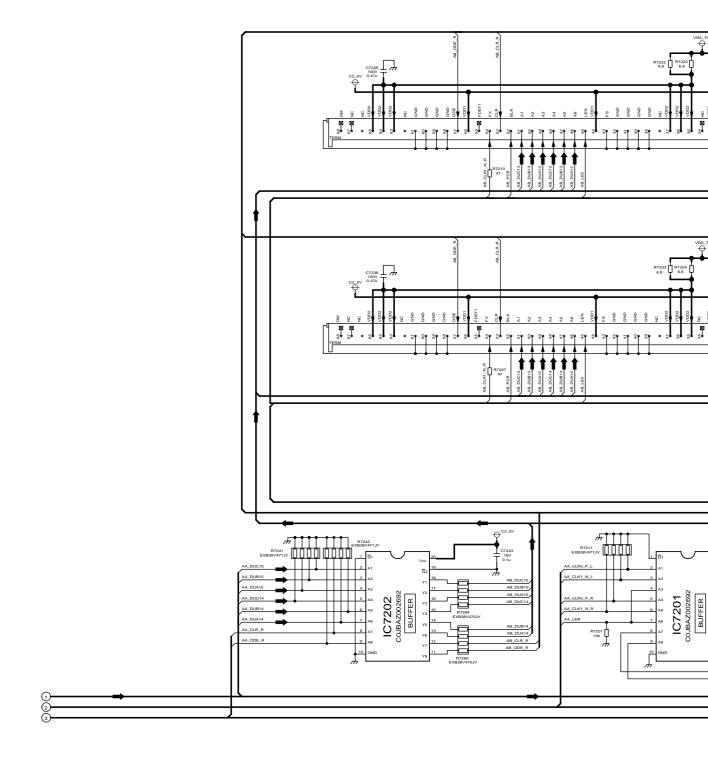





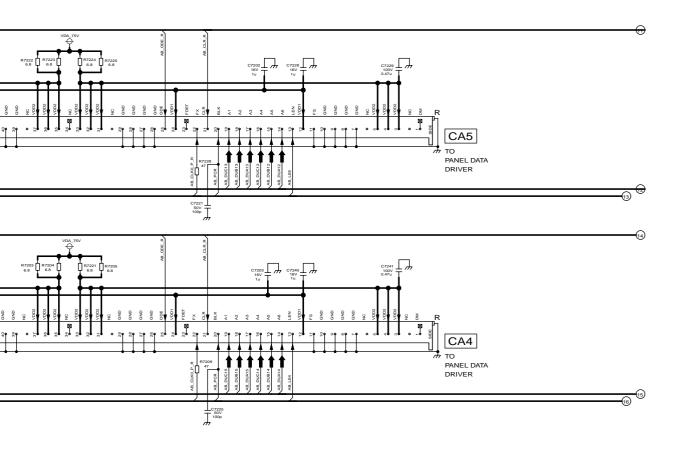


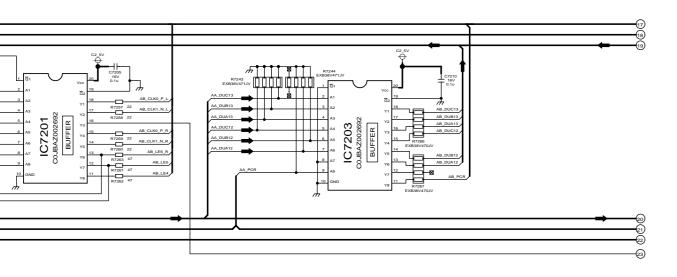



TH-50PV600E, TH-50PX600B C2-Board (2 of 3) Schematic Diagram

14.51. C2-Board (3 of 3) Schematic Diagram


C2-BOARD TXNC21BETB (3/3)

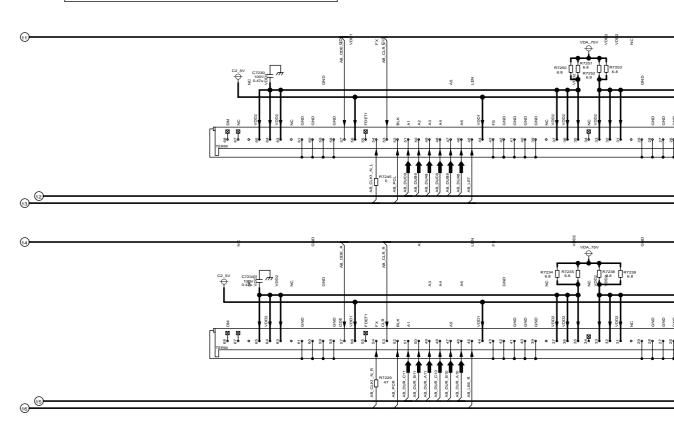


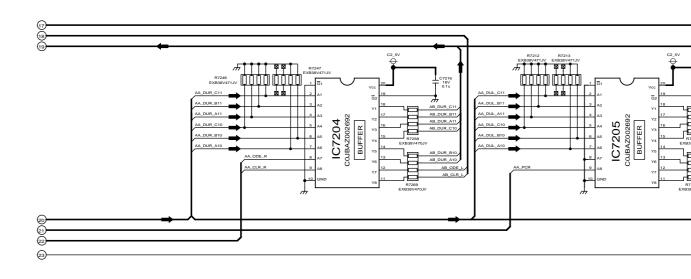







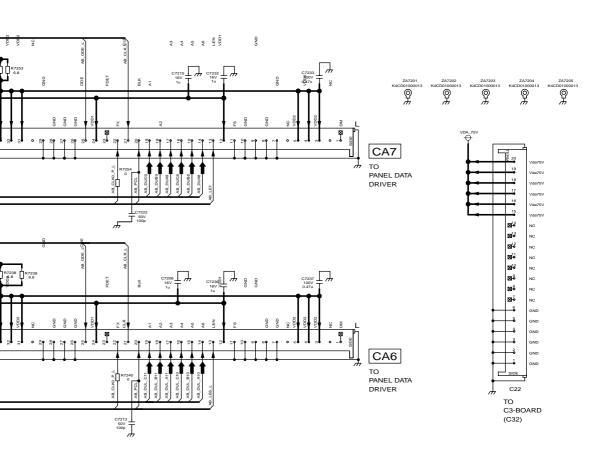

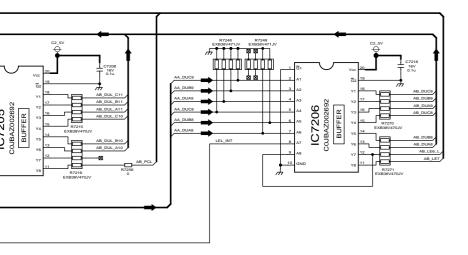





14.52. C3-Board (1 of 2) Schematic Diagram

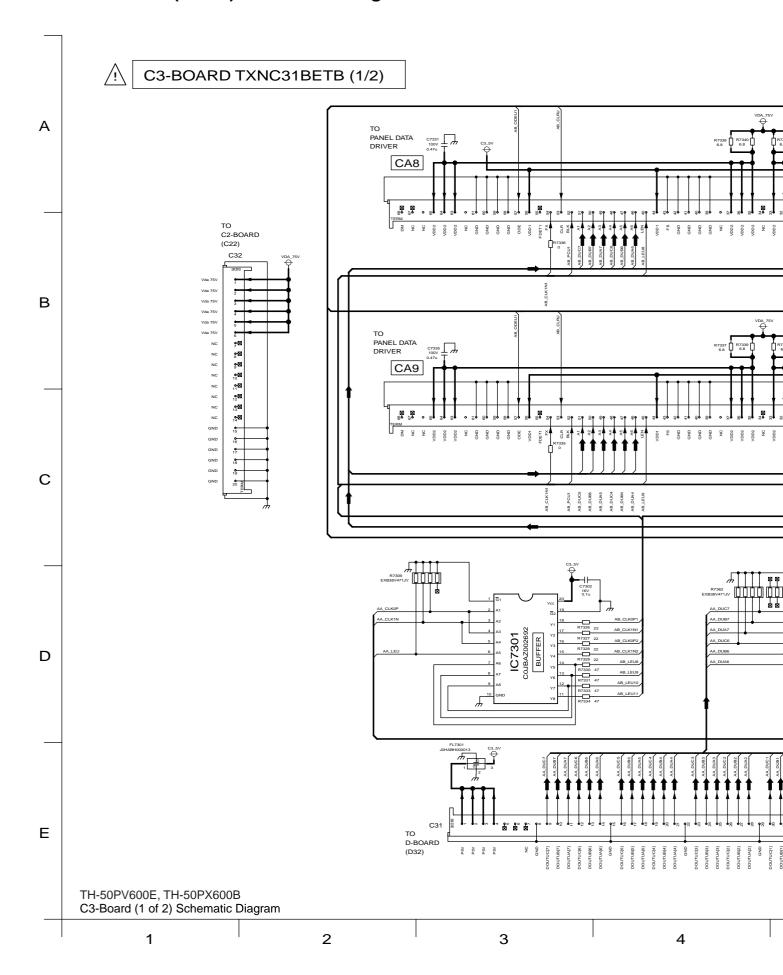




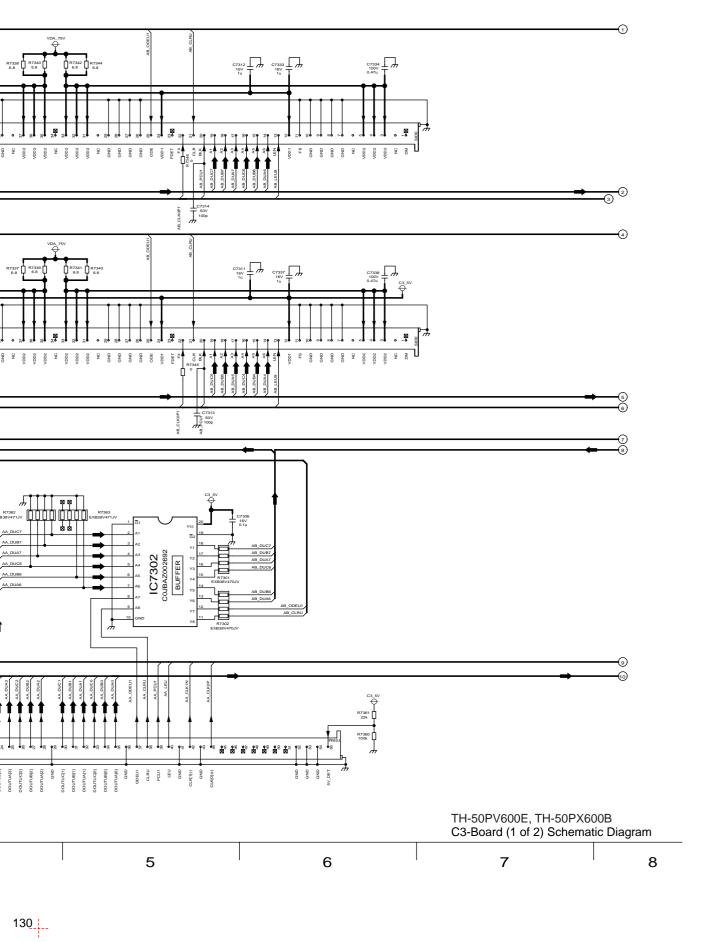



14.53. C3-Board (2 of 2) Schematic Diagram

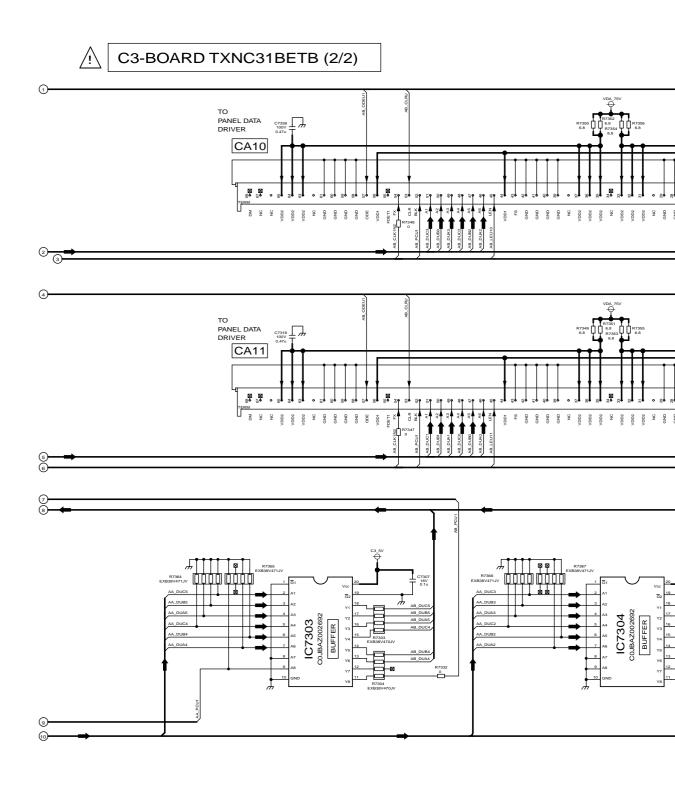






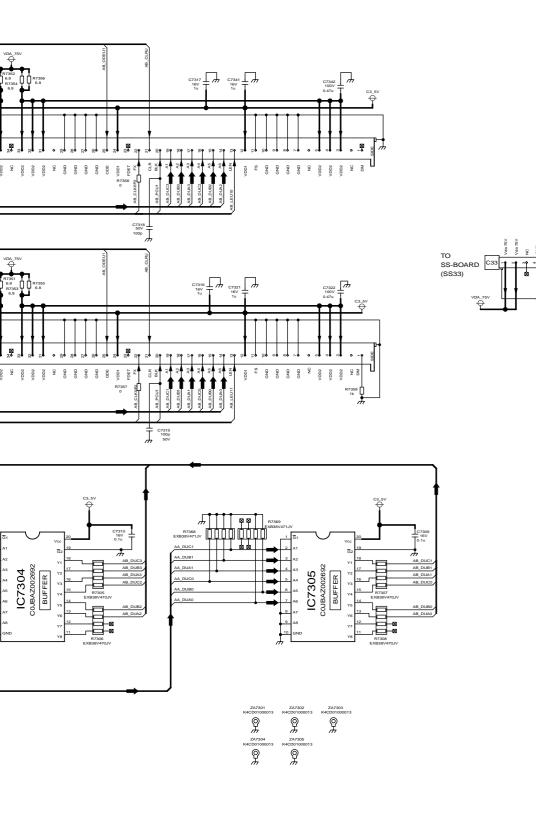




--


14.54. C4-Board (1 of 2) Schematic Diagram

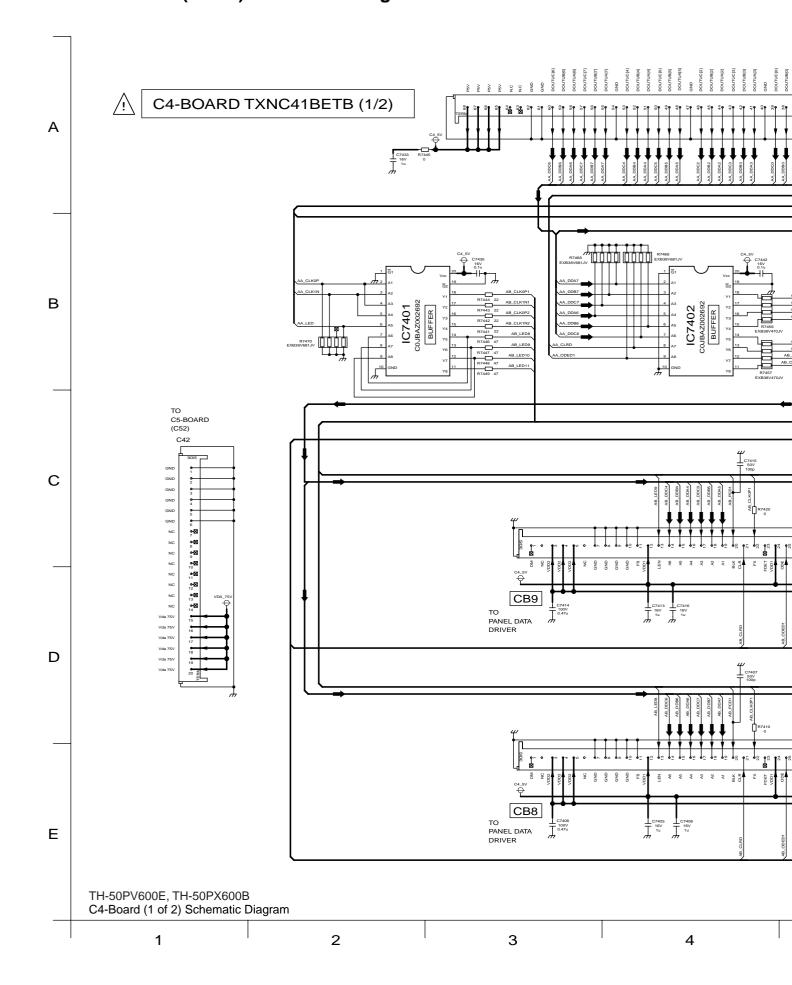




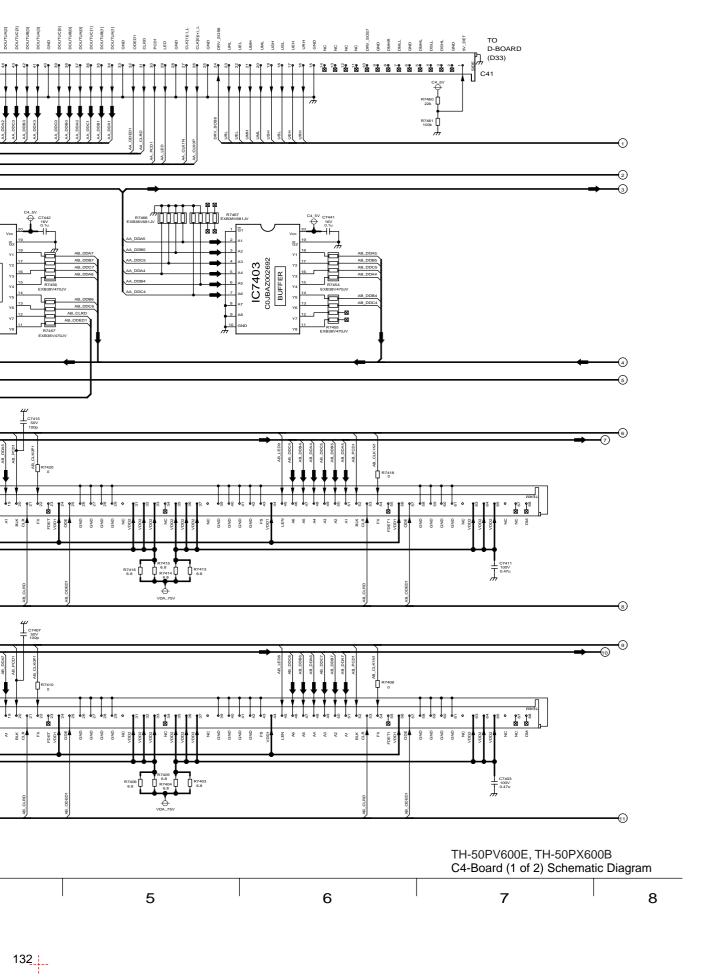


14.55. C4-Board (2 of 2) Schematic Diagram

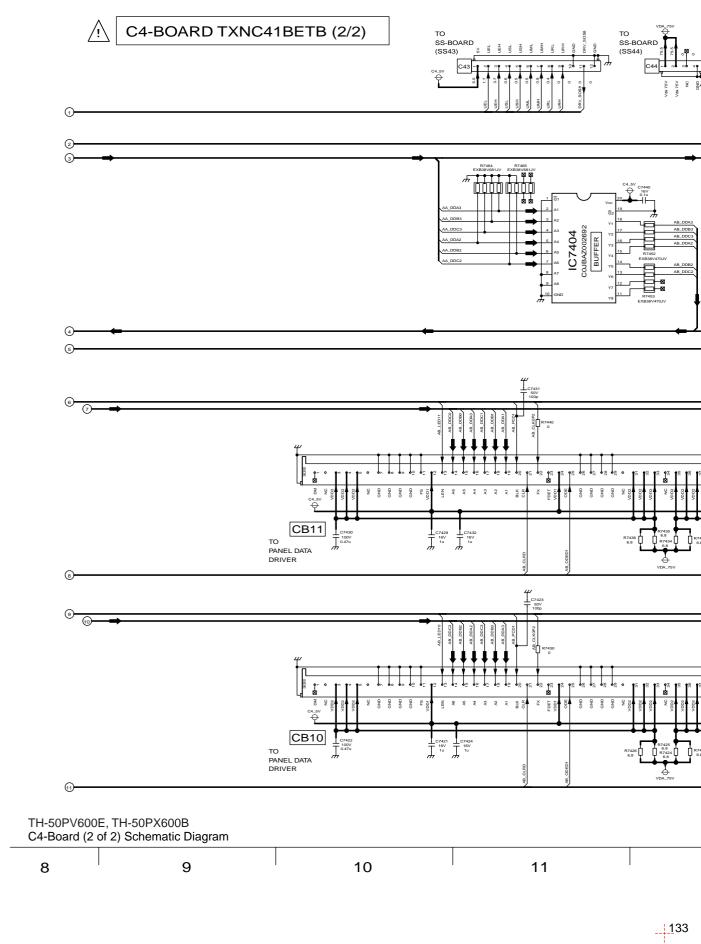









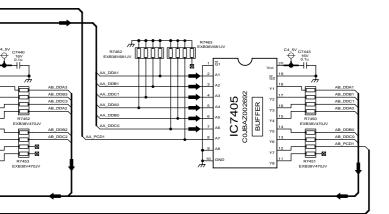

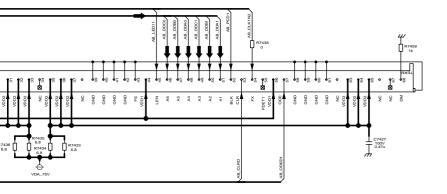


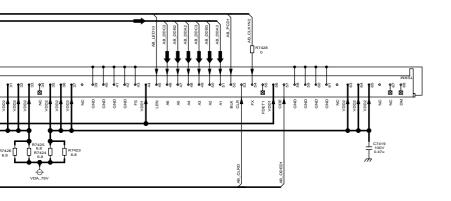


TH-50PV600E, TH-50PX600B C4-Board (2 of 2) Schematic Diagram

12 13 14 15

14.56. C5-Board (1 of 3) Schematic Diagram

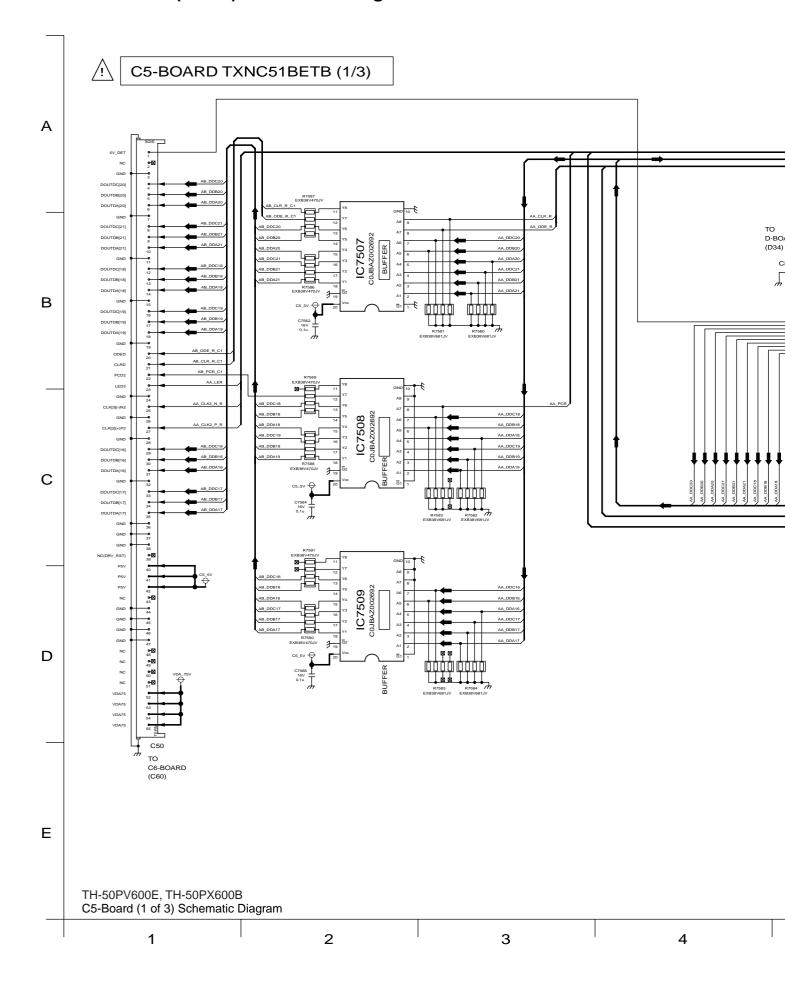




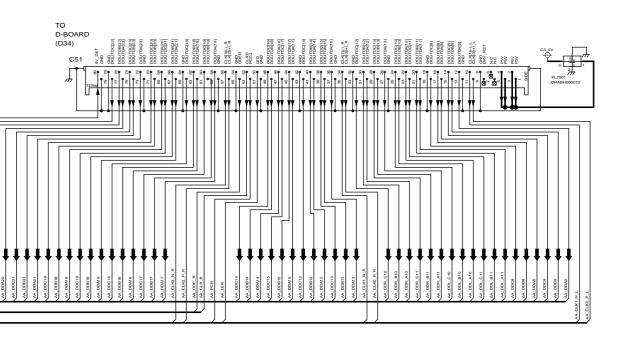



			TH-50PV600E, TH-50PX600B C5-Board (1 of 3) Schematic Diagram	
	5	6	7	8

14.57. C5-Board (2 of 3) Schematic Diagram


C5-BOARD TXNC51BETB (2/3)

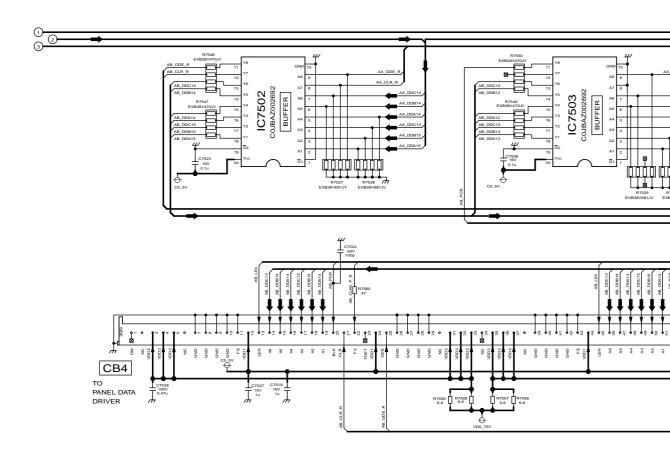

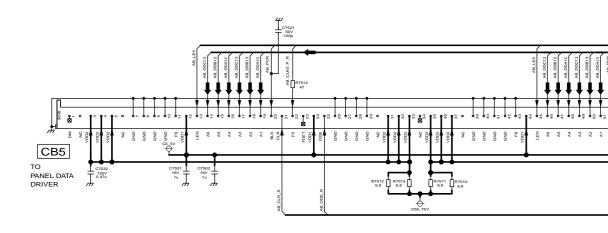







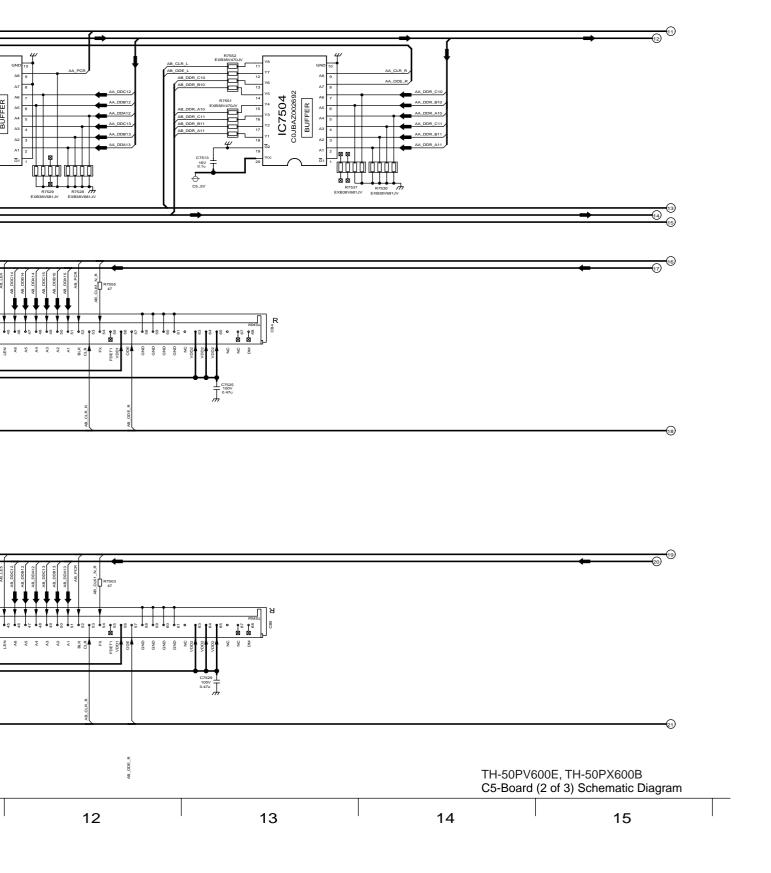

14.58. C5-Board (3 of 3) Schematic Diagram


C5-BOARD TXNC51BETB (3/3)

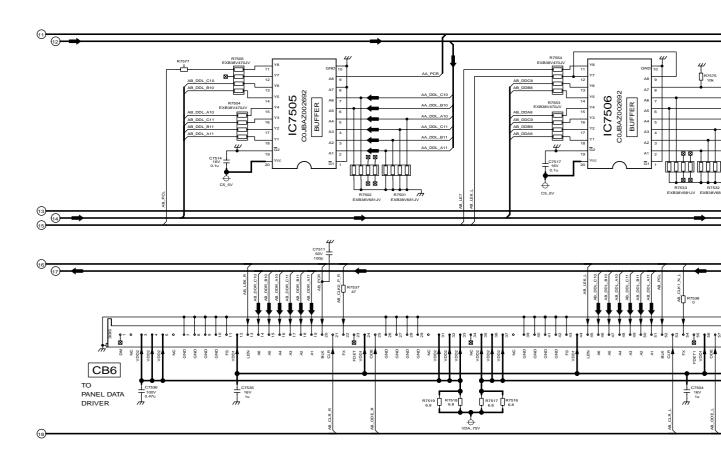


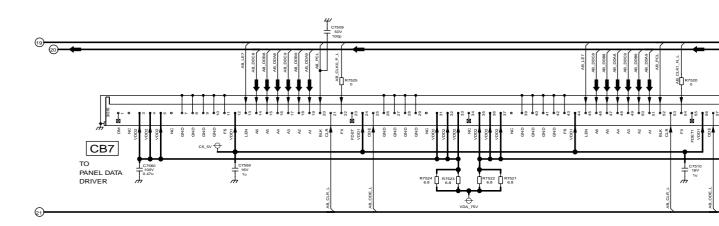






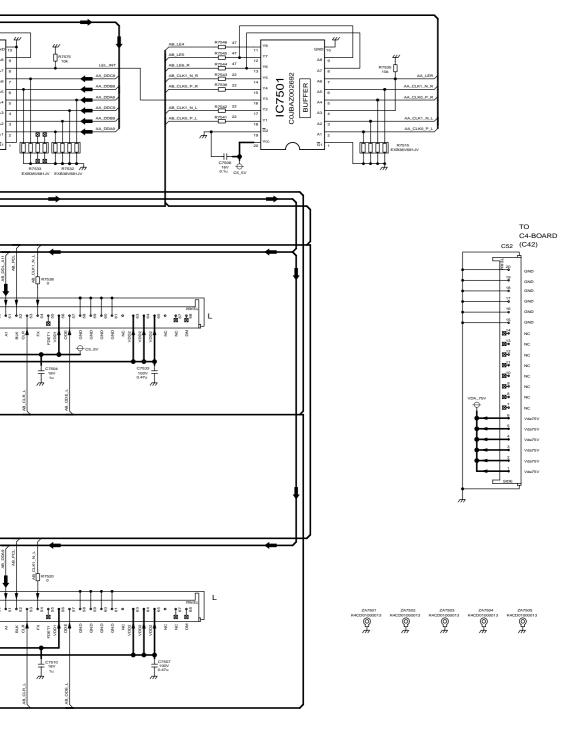





14.59. C6-Board (1 of 2) Schematic Diagram

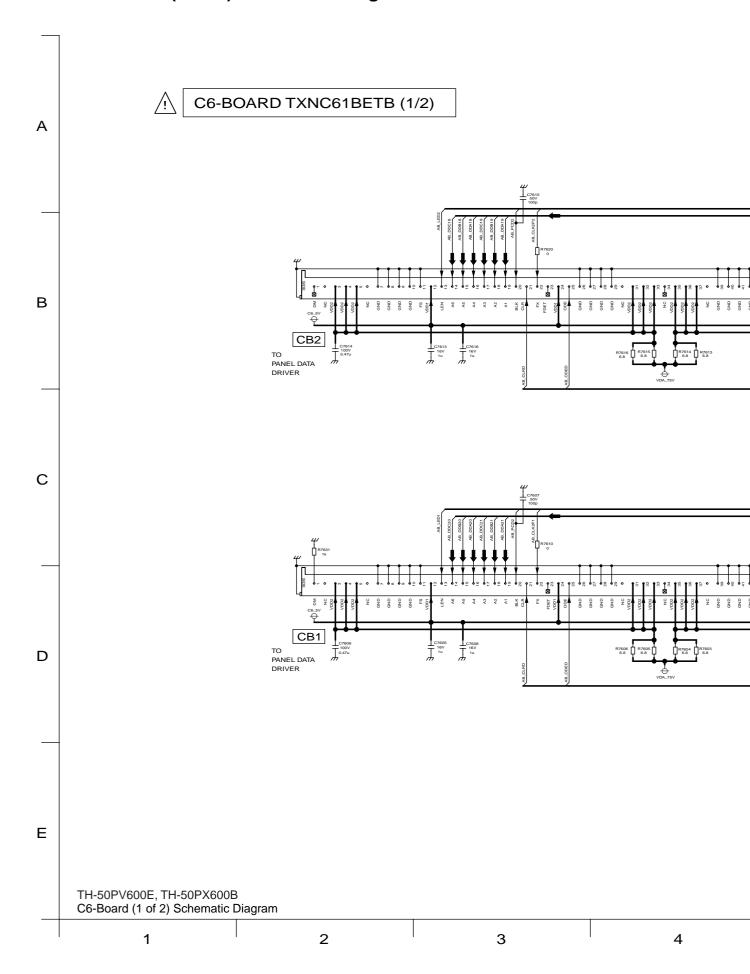



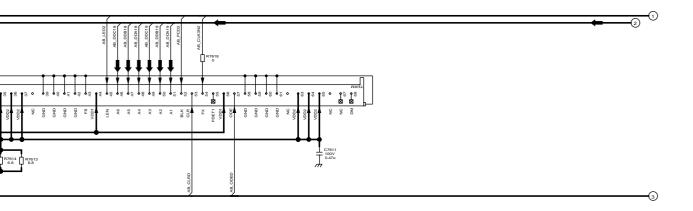

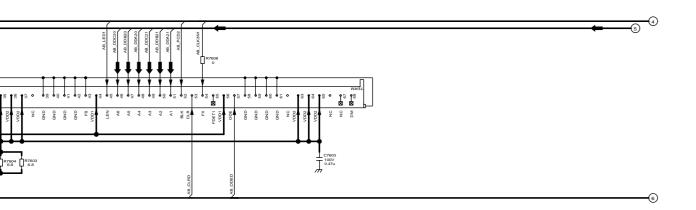


TH-50PV600E, TH-50PX600B C6-Board (1 of 2) Schematic Diagram

4 5 6 7 8

14.60. C6-Board (2 of 2) Schematic Diagram






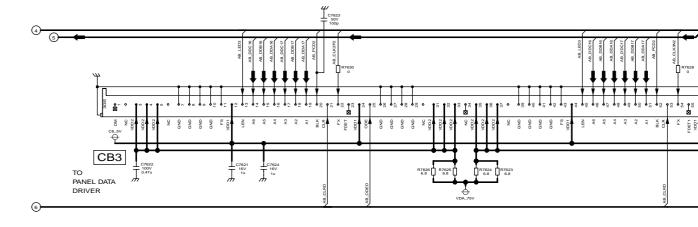







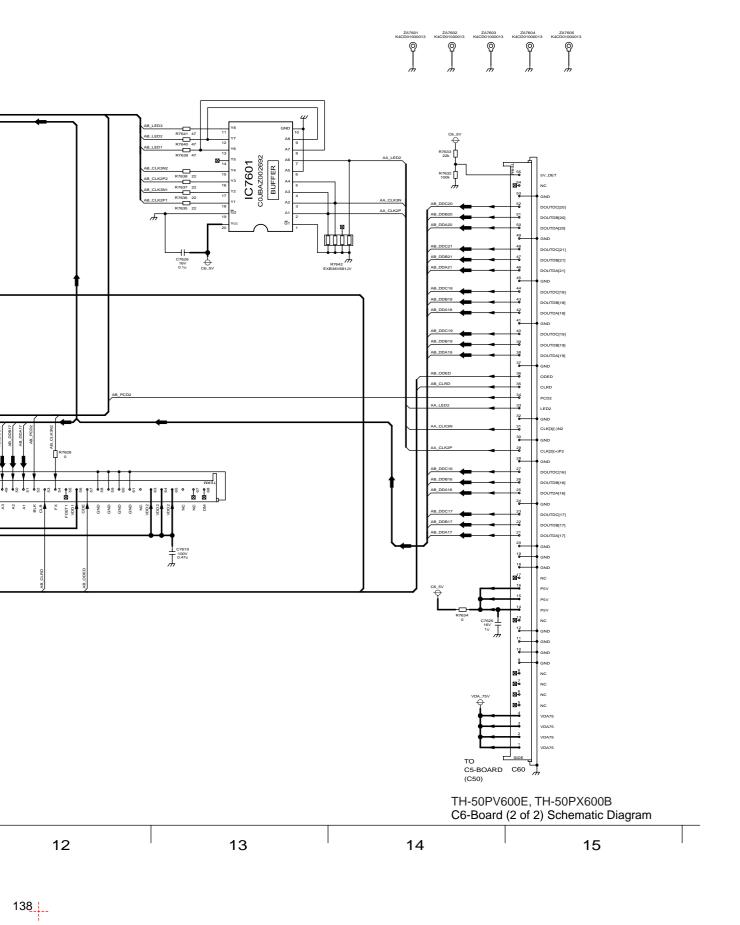


14.61. SS, S, SS2 and SS3-Board Schematic Diagram

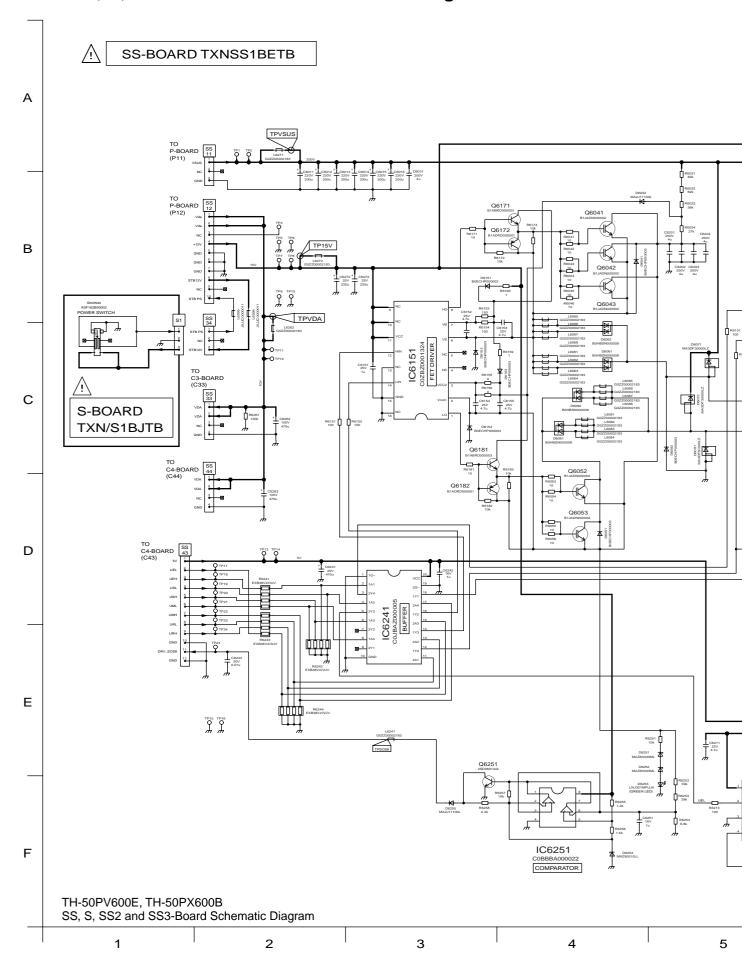

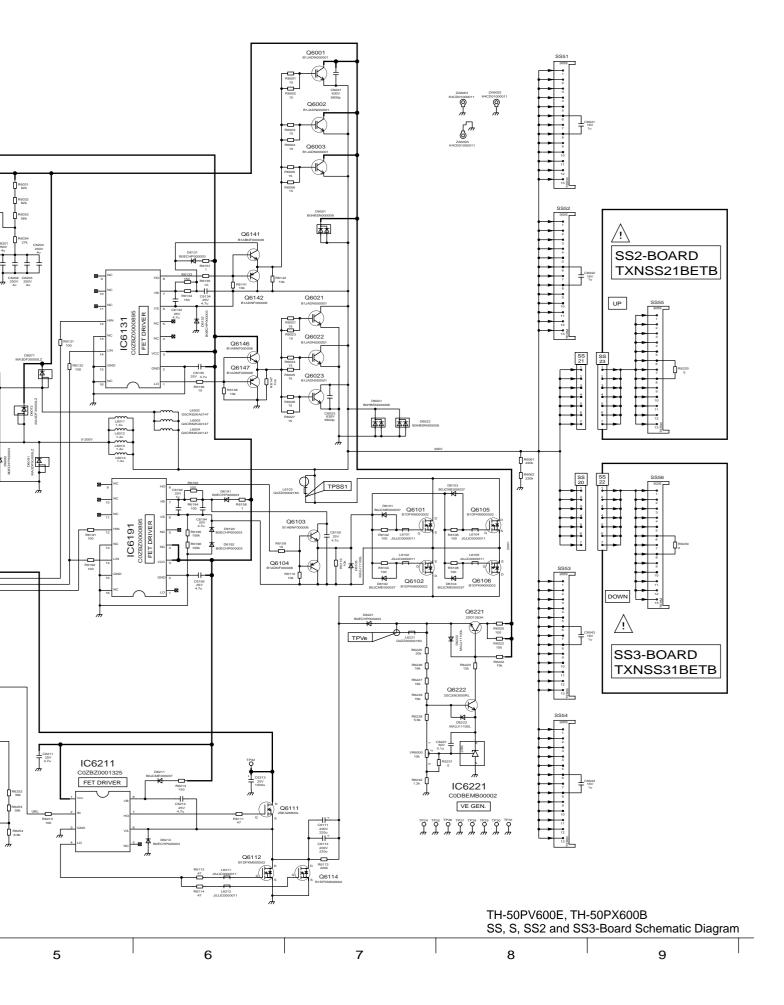


14.62. SC, SU and SD-Board Block Diagram

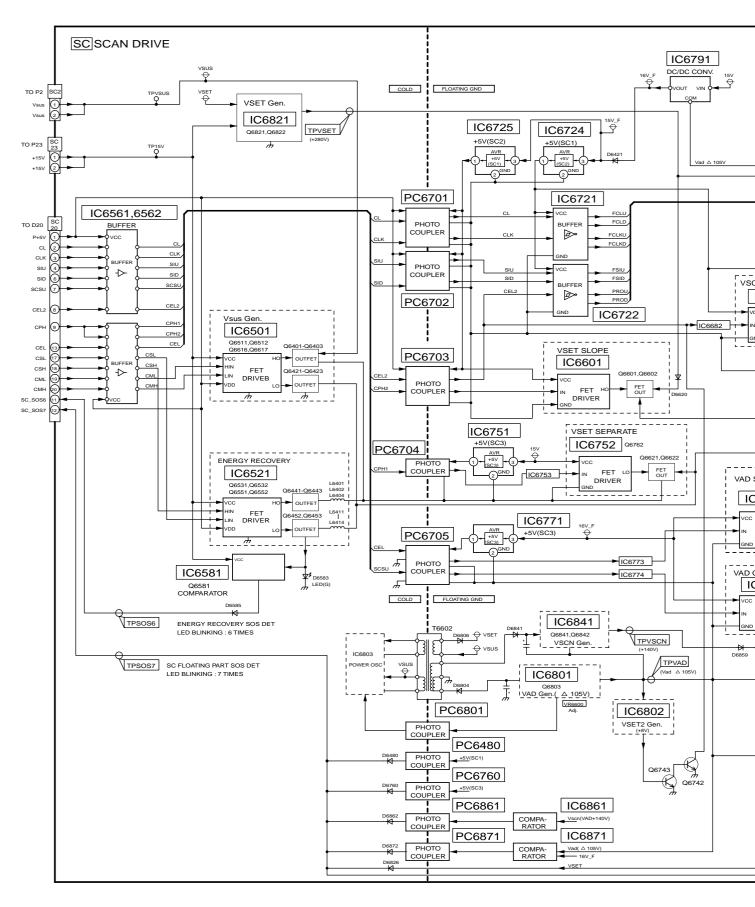


TH-50PV600E, TH-50PX600B SC, SU and SD-Board Block Diagram




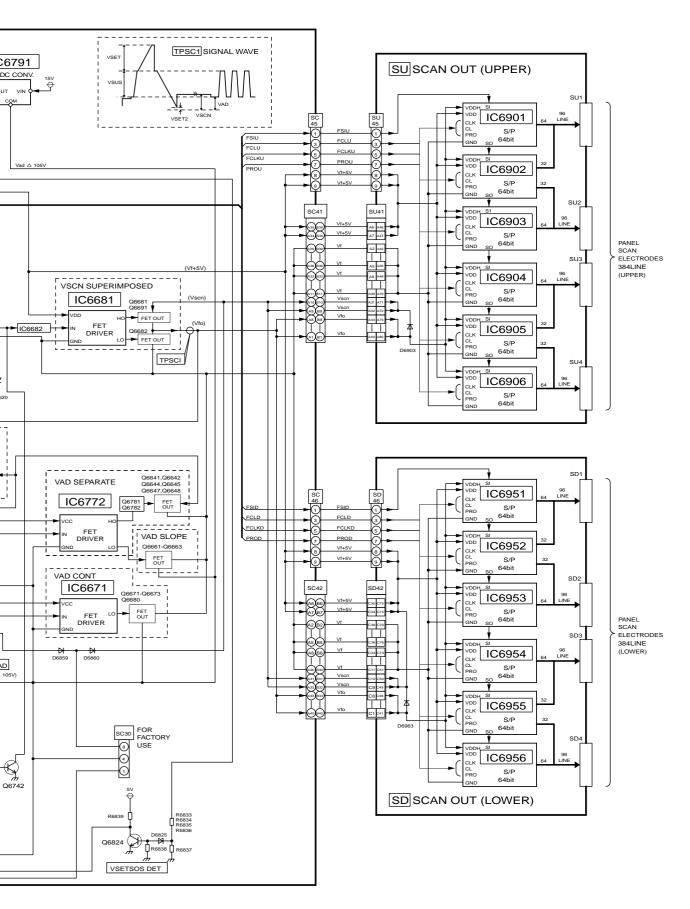


TH-50PV600E, TH-50PX600B SC, SU and SD-Board Block Diagram


14.63. SC-Board (1 of 2) Schematic Diagram

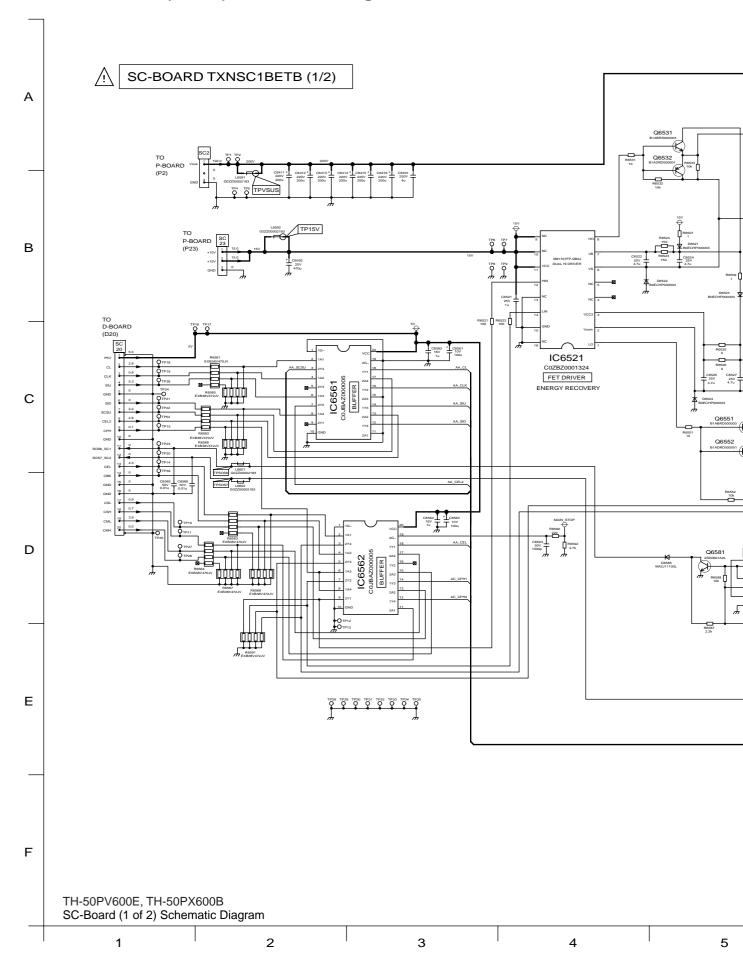

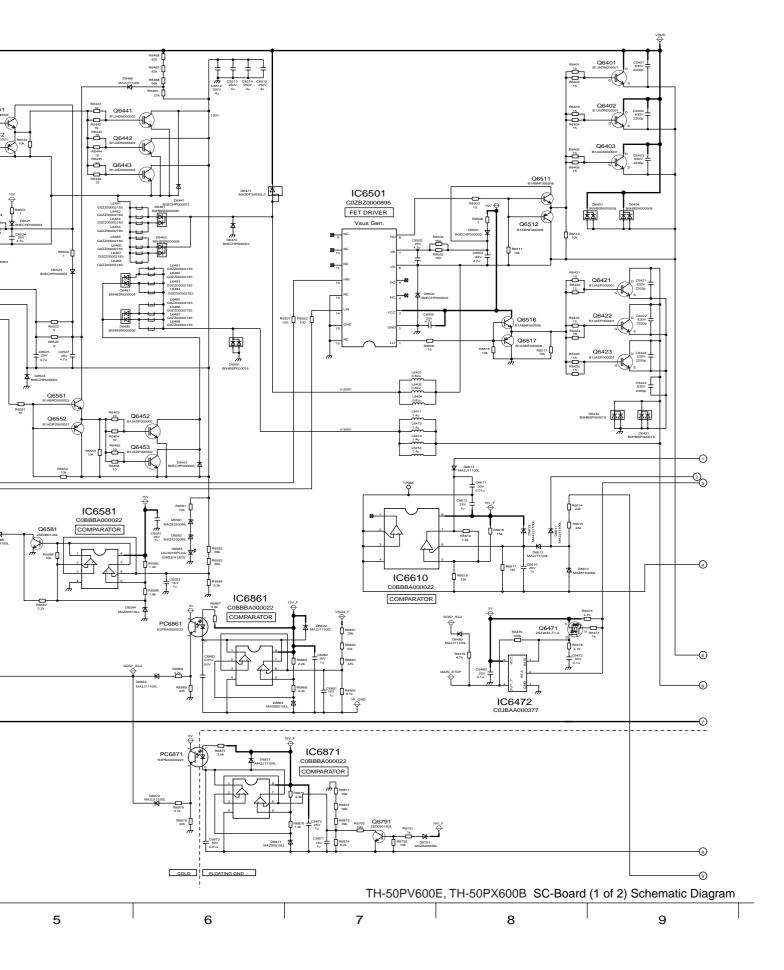


14.64. SC-Board (2 of 2) Schematic Diagram

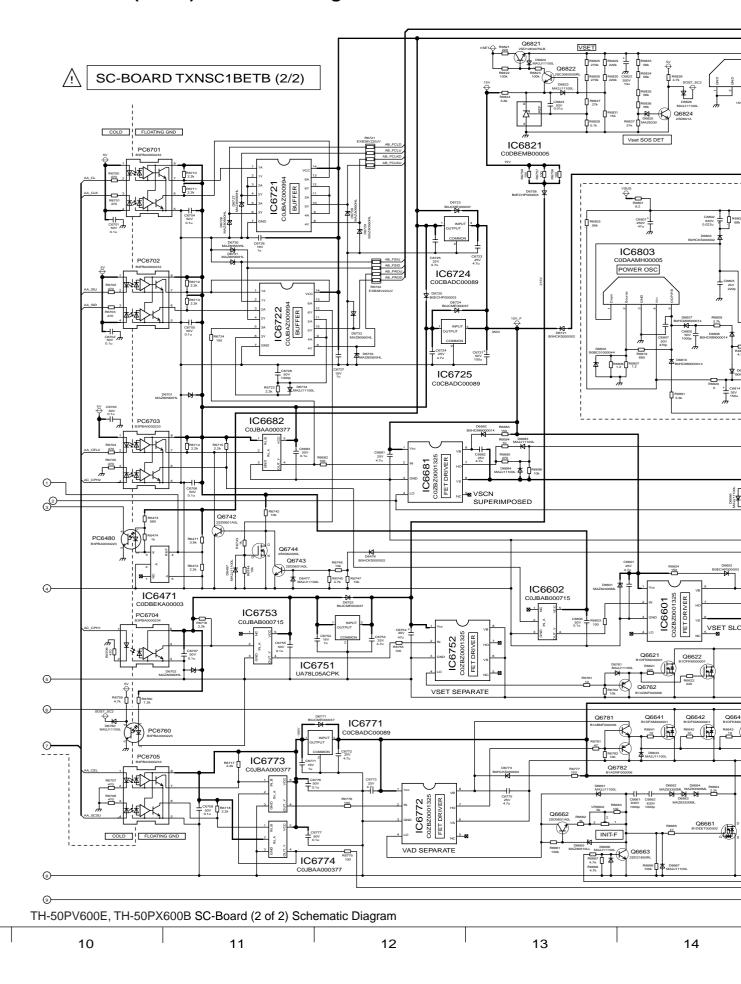


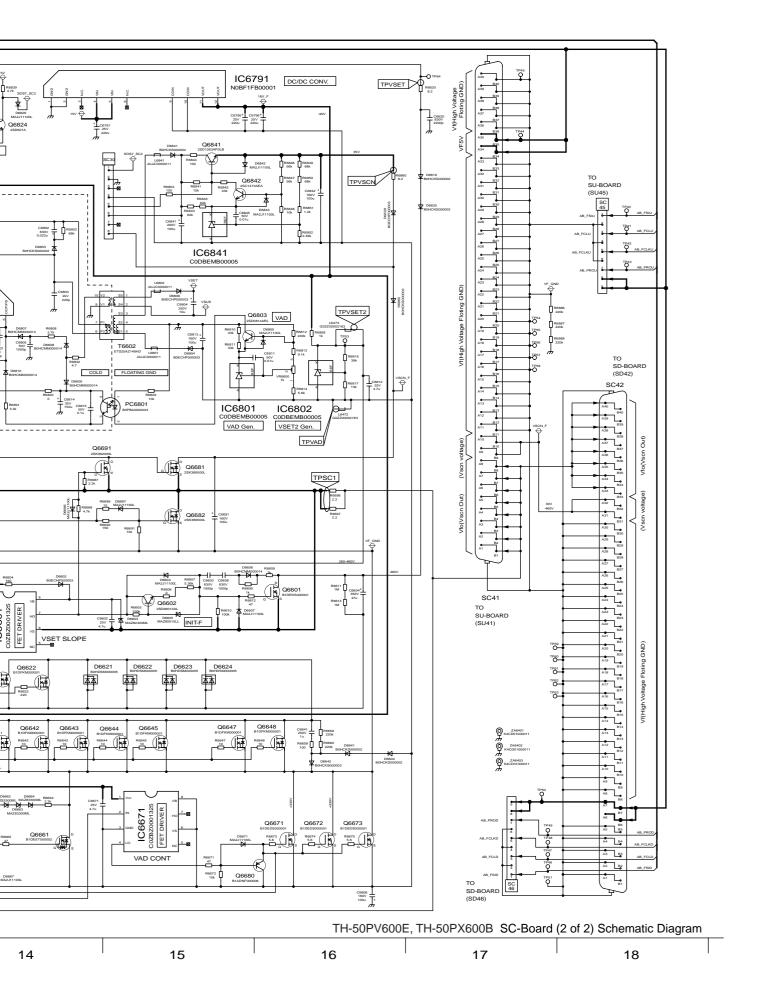

14.65. SU-Board (1 of 2) Schematic Diagram

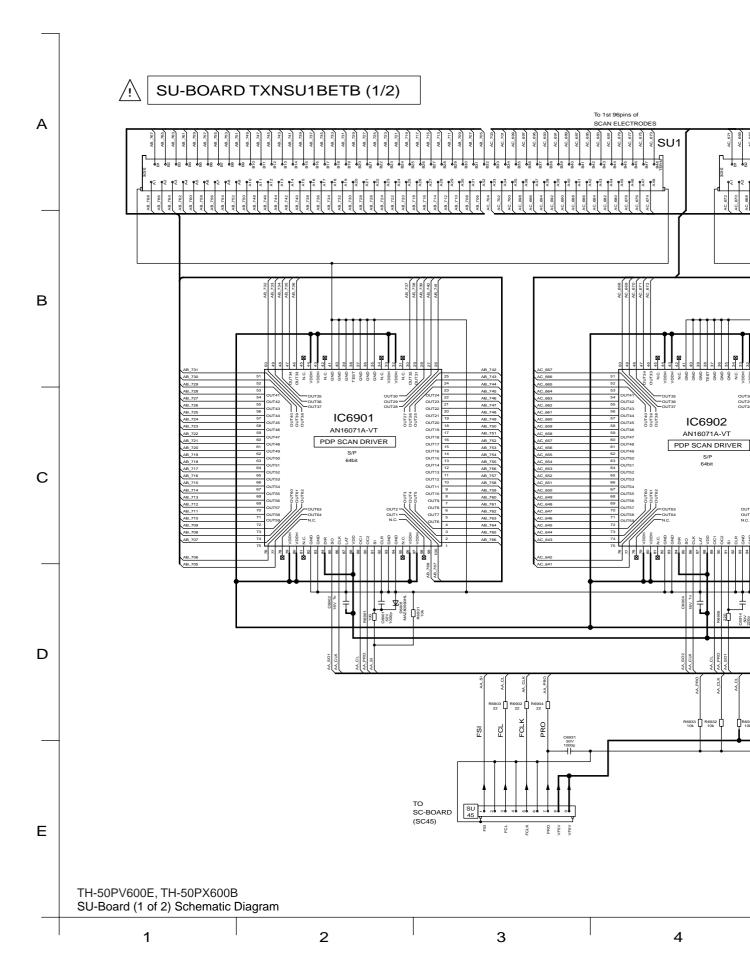




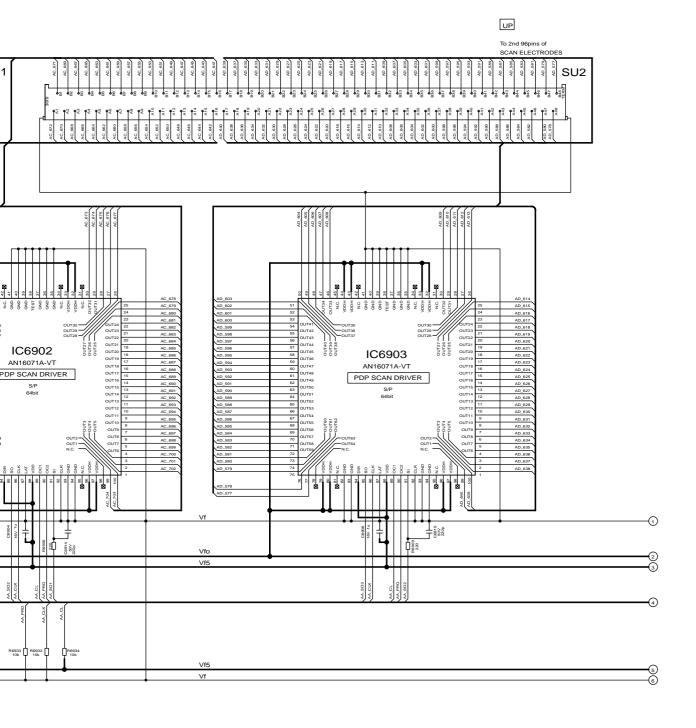





14.66. SU-Board (2 of 2) Schematic Diagram

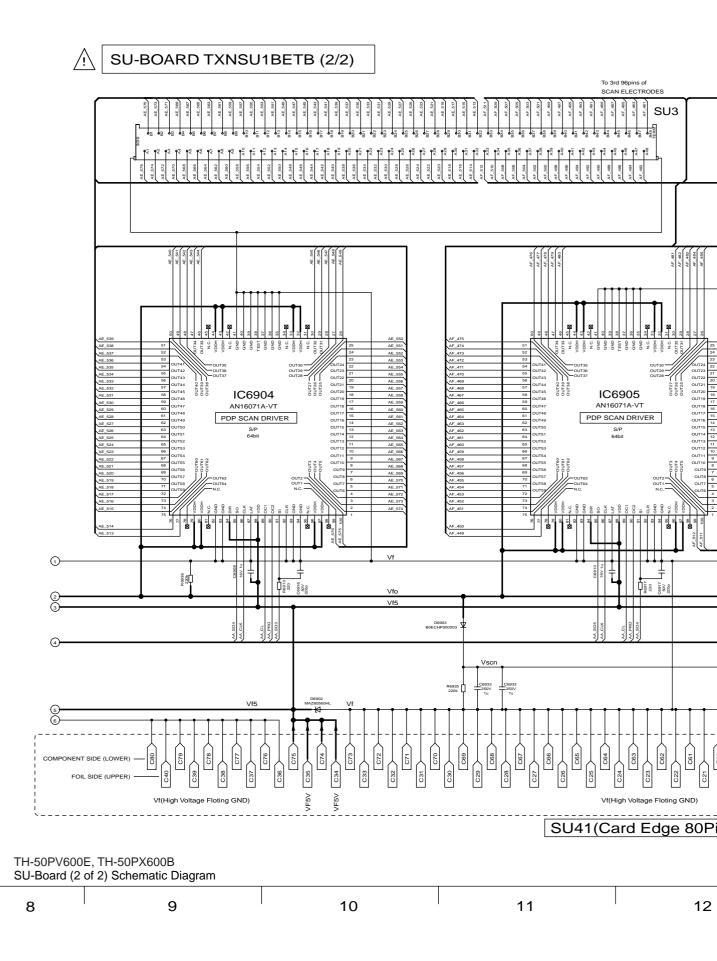




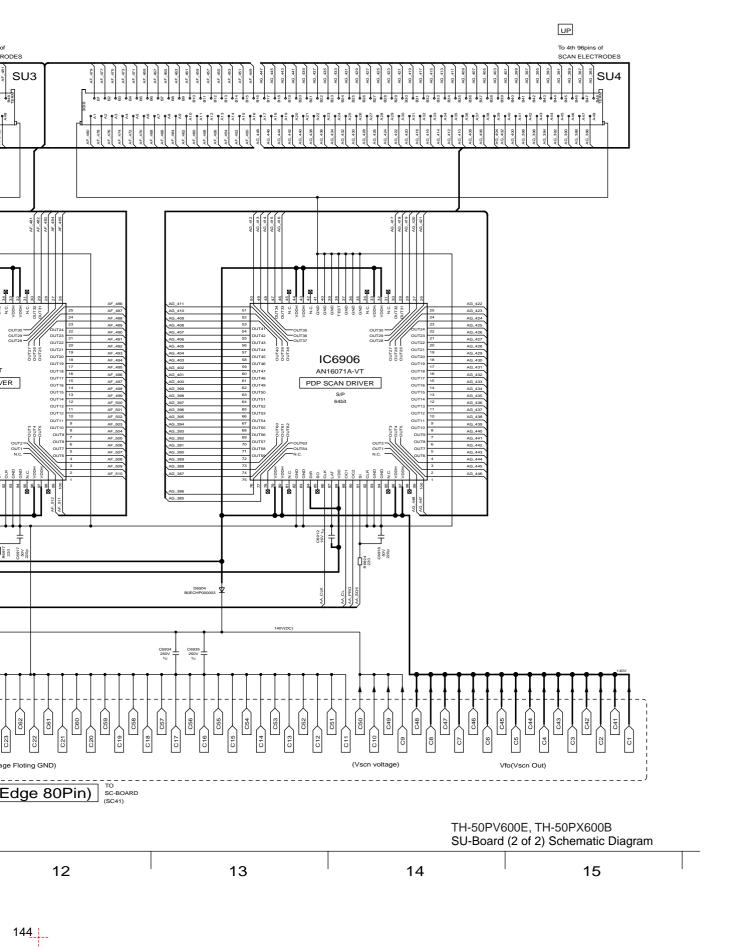


14.67. SD-Board (1 of 2) Schematic Diagram

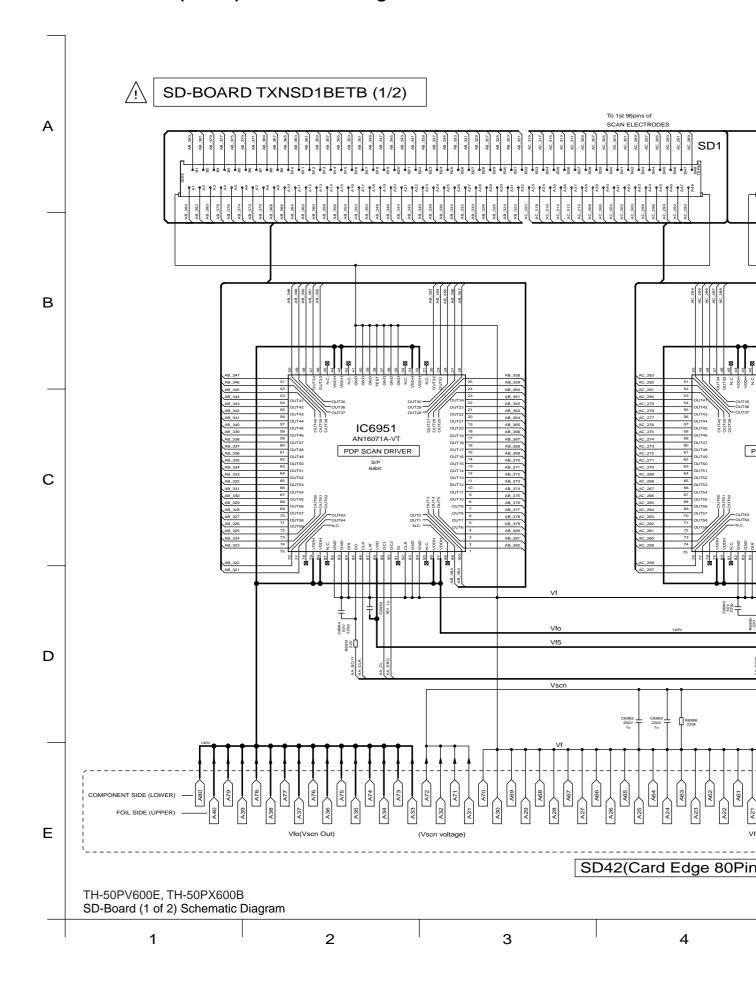


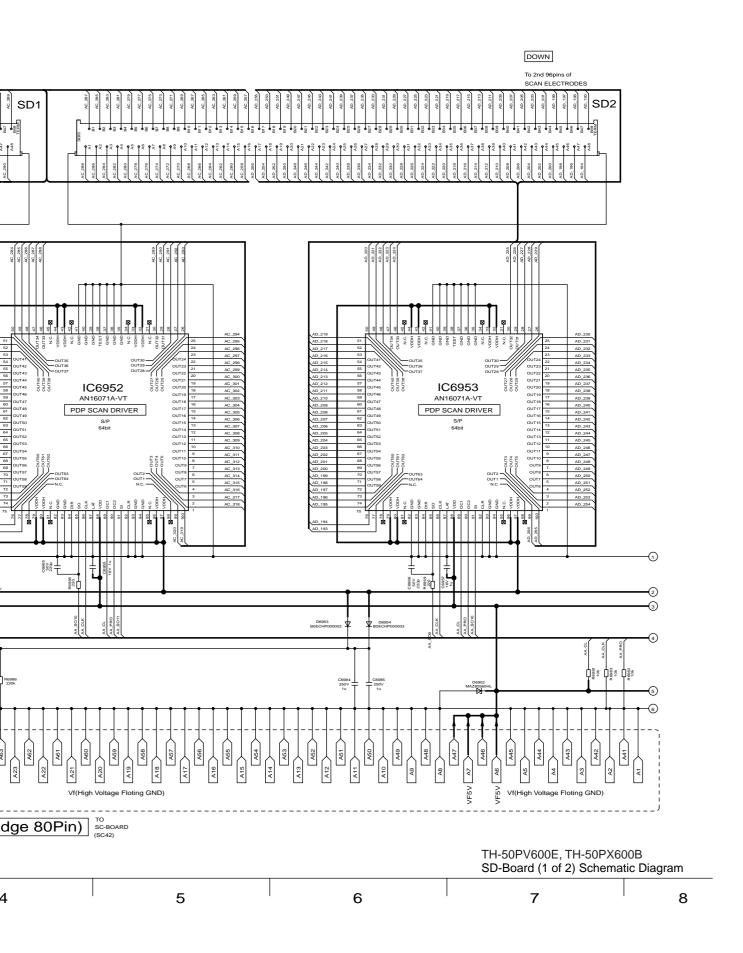


14.68. SD-Board (2 of 2) Schematic Diagram

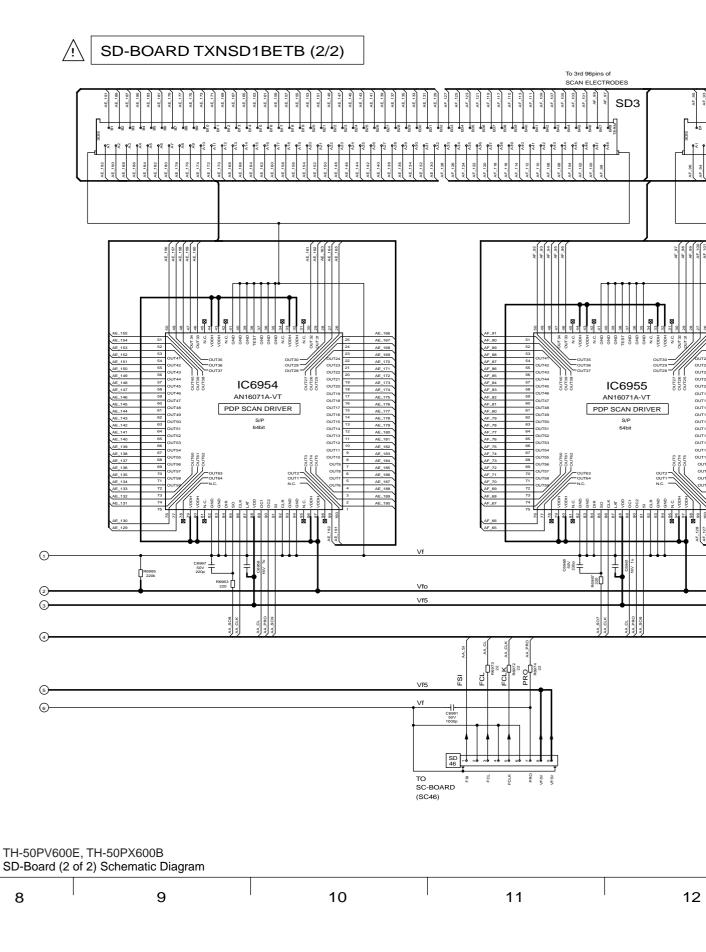





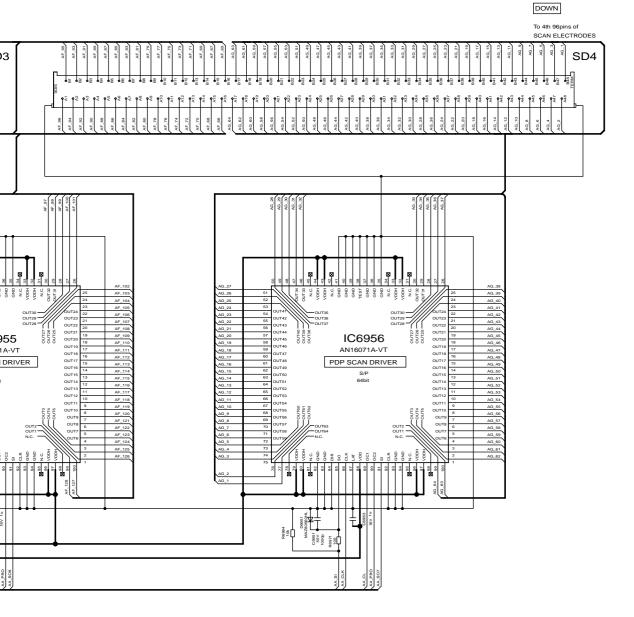





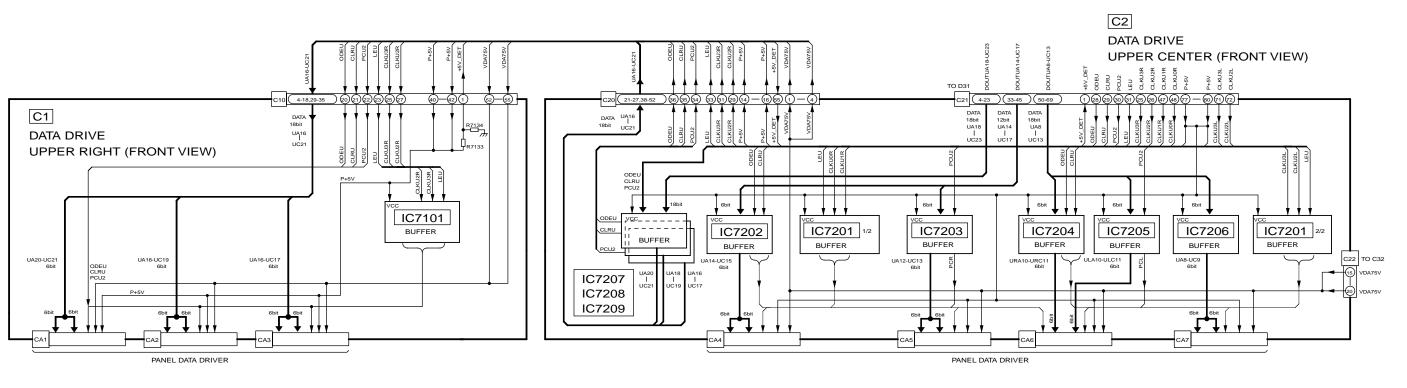


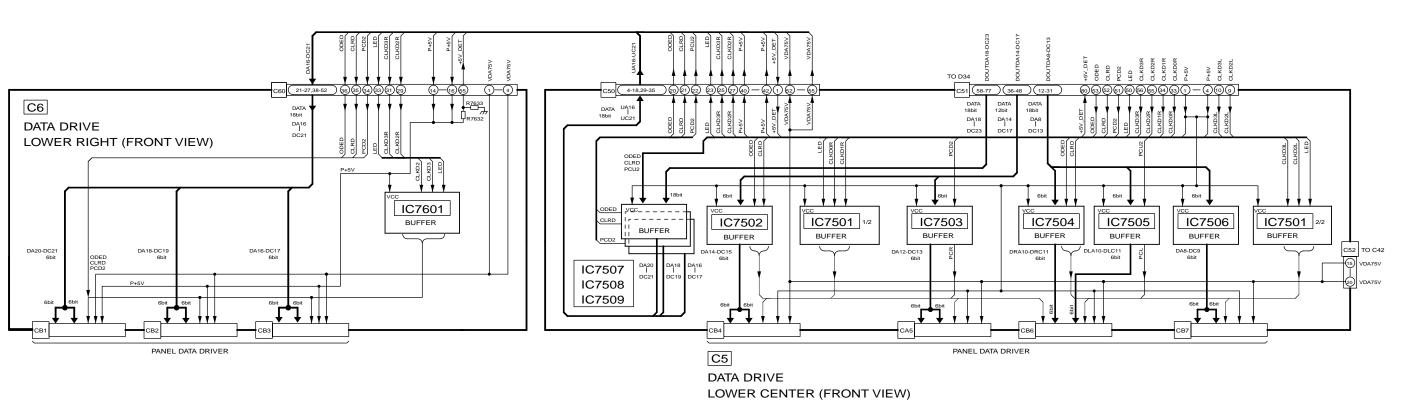


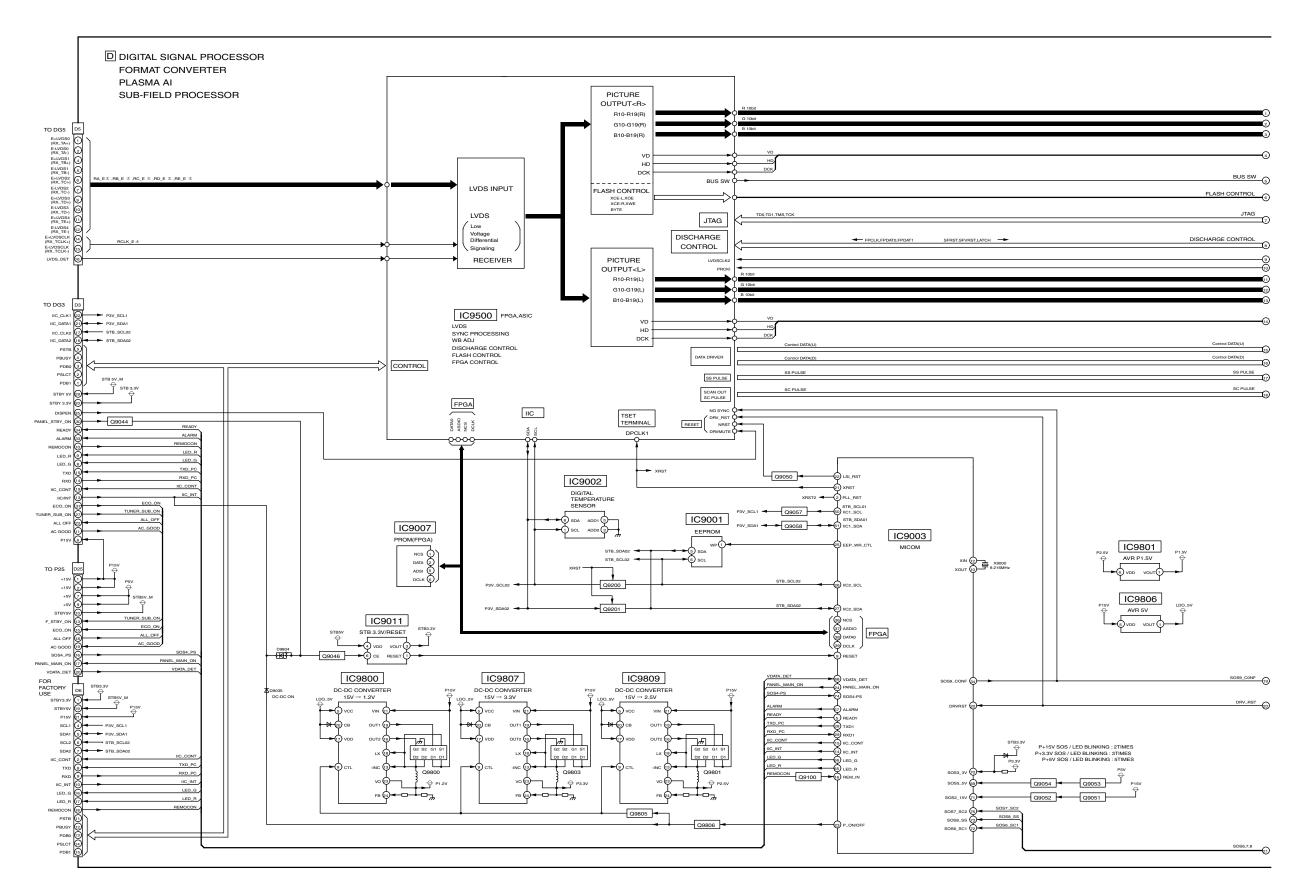


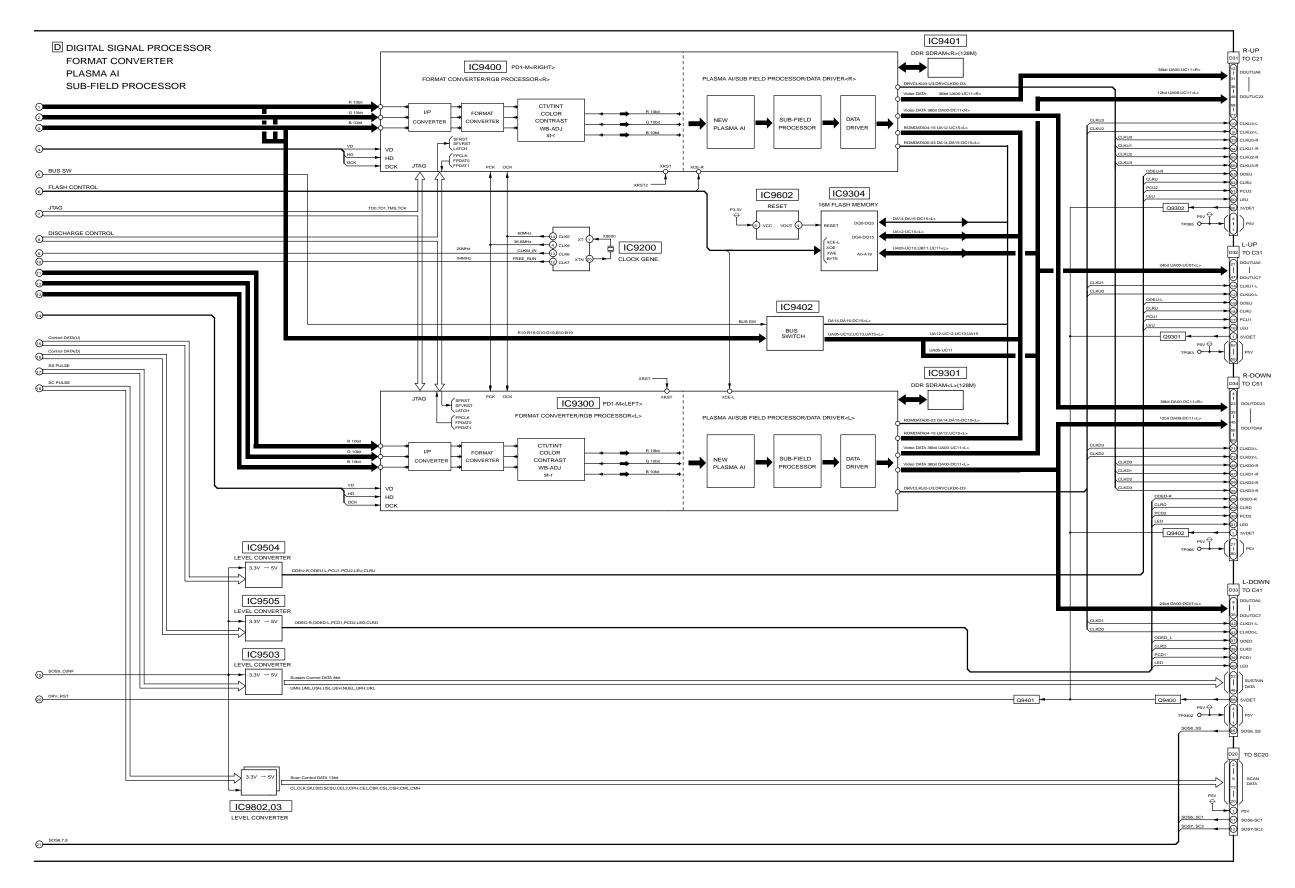


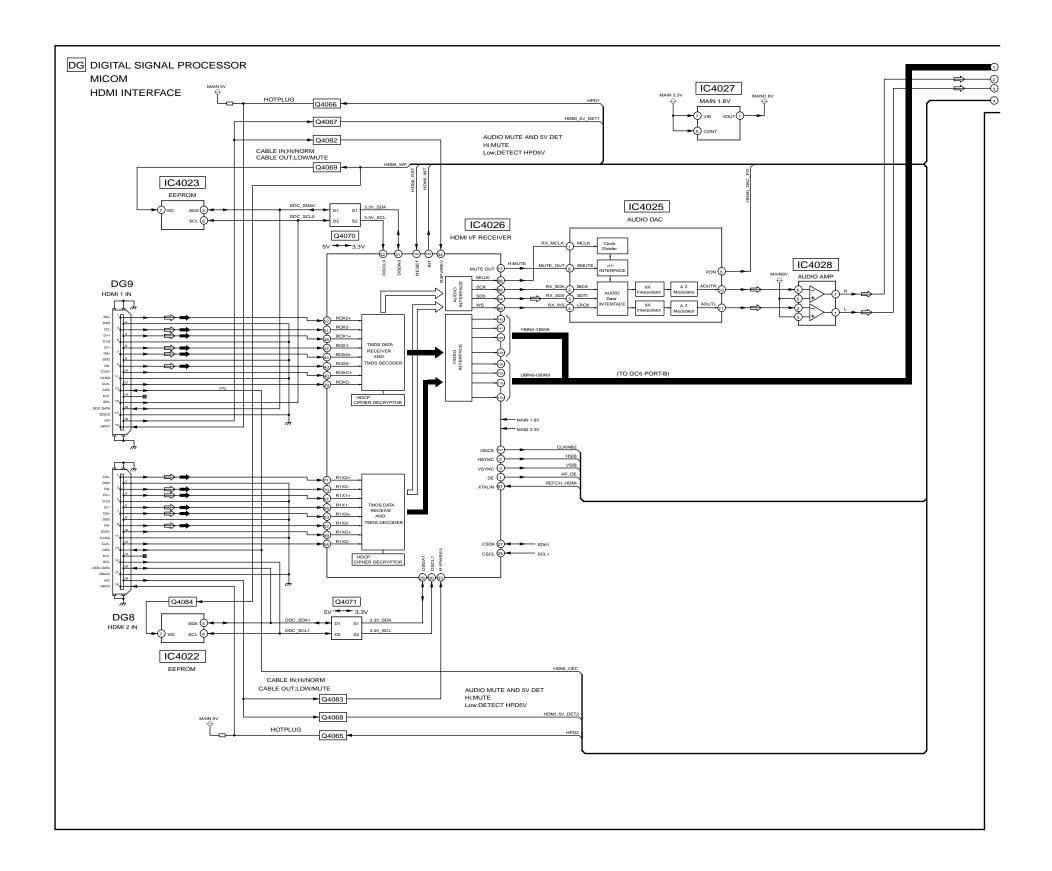

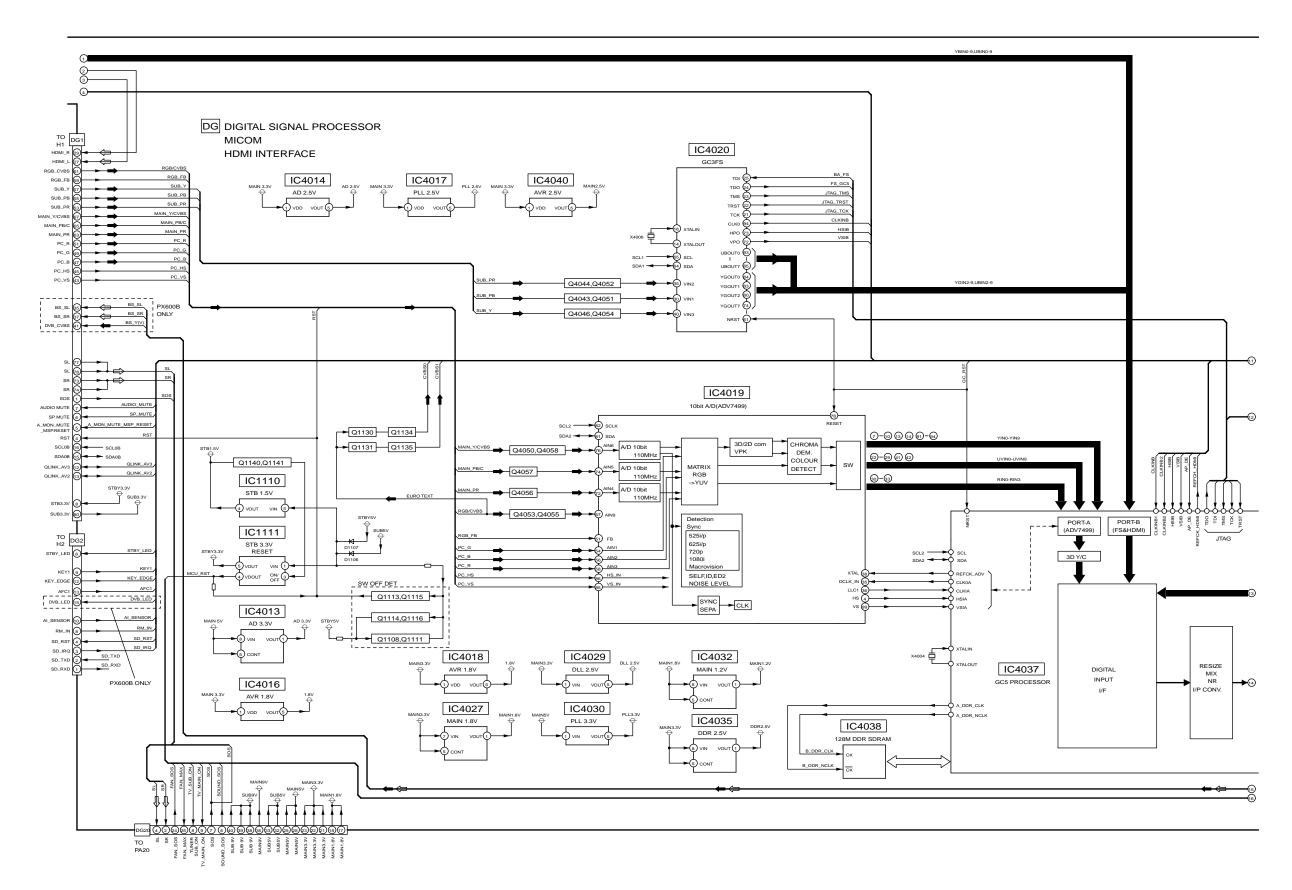


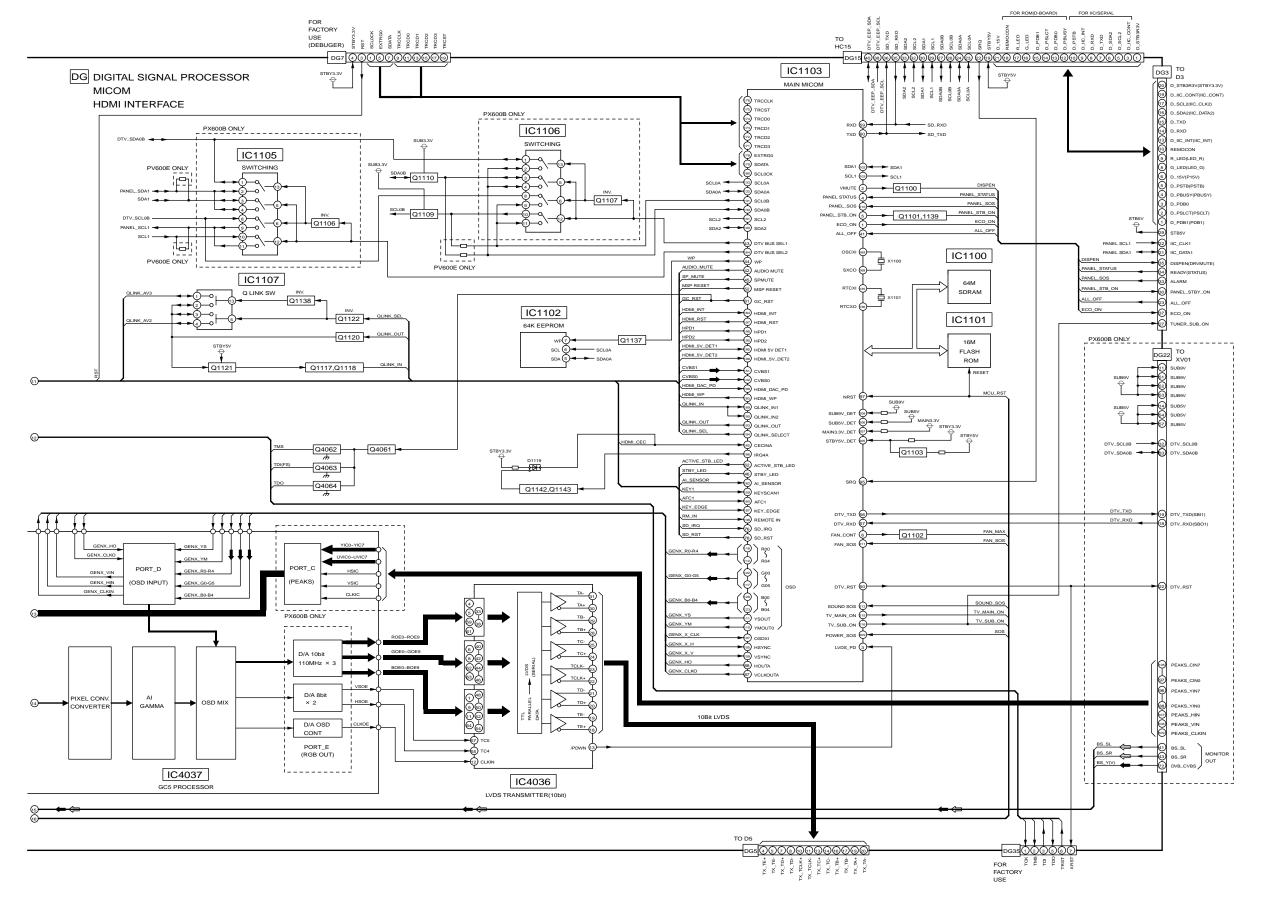


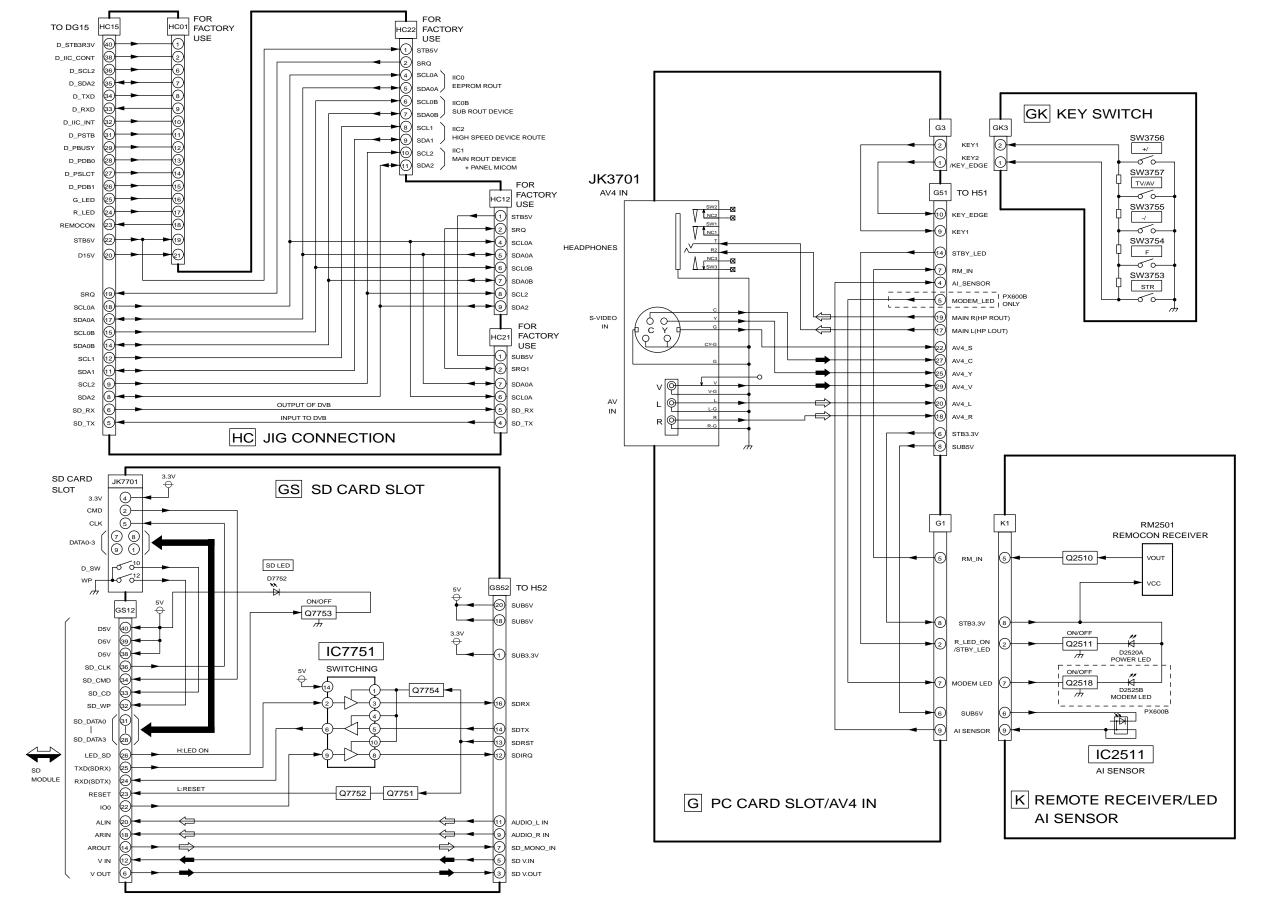


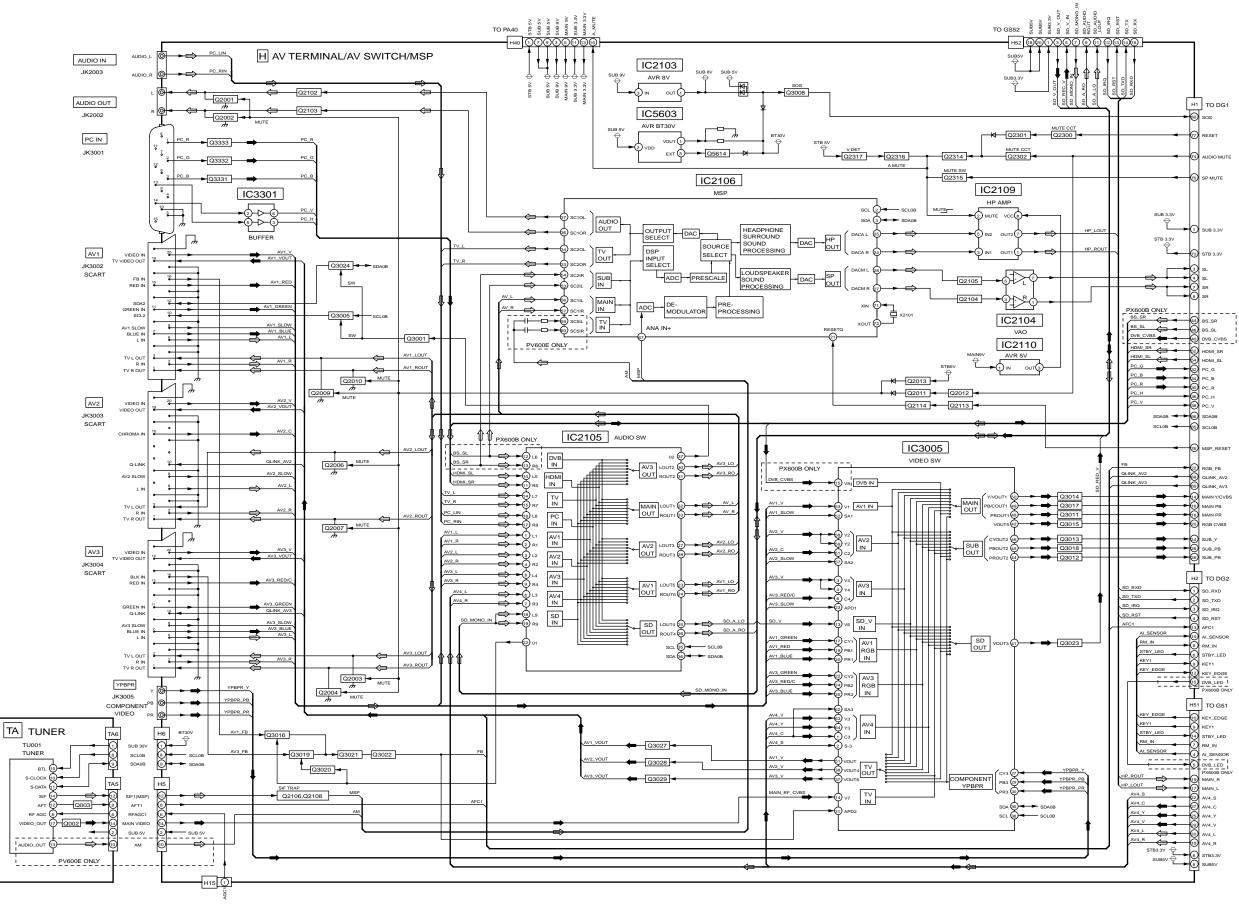



AUDIO_OUT

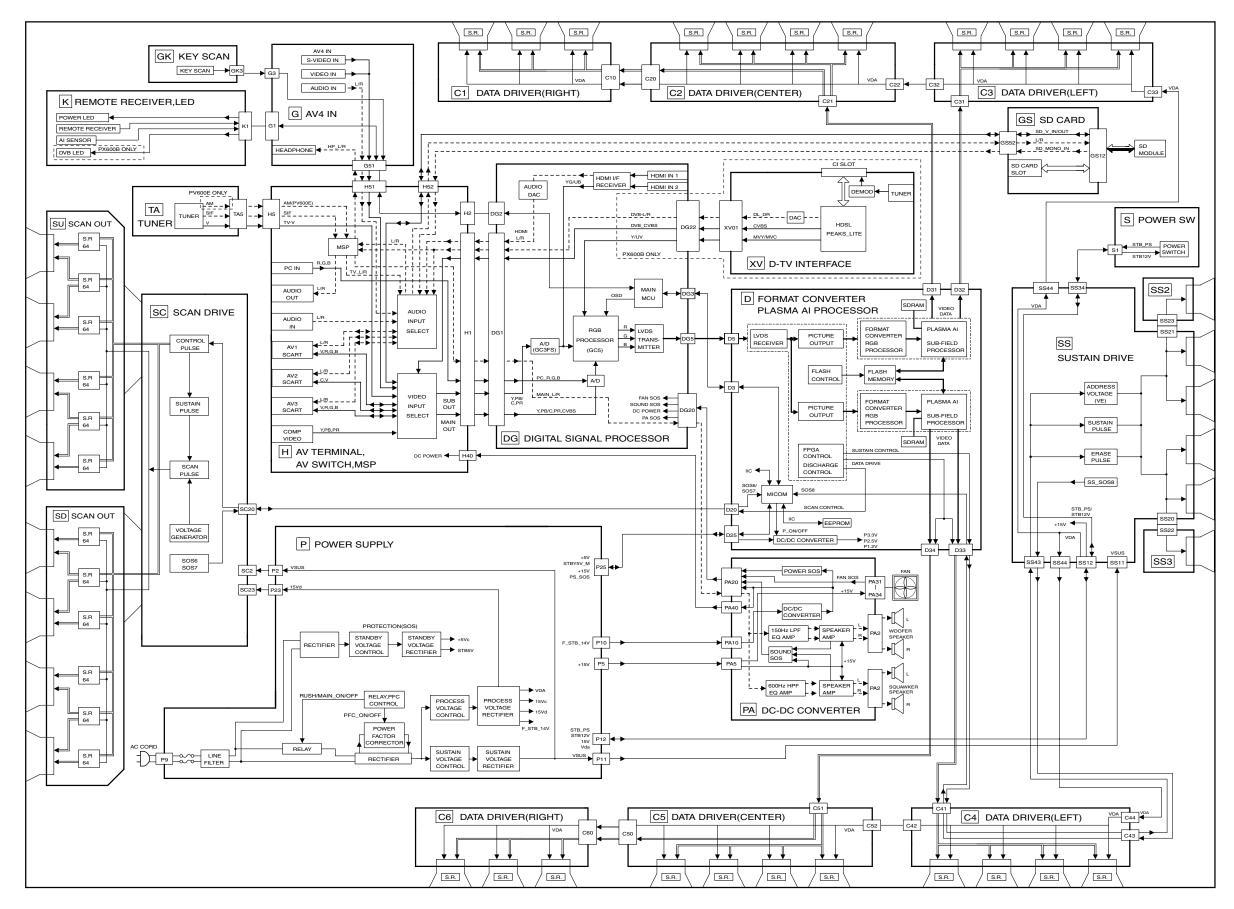


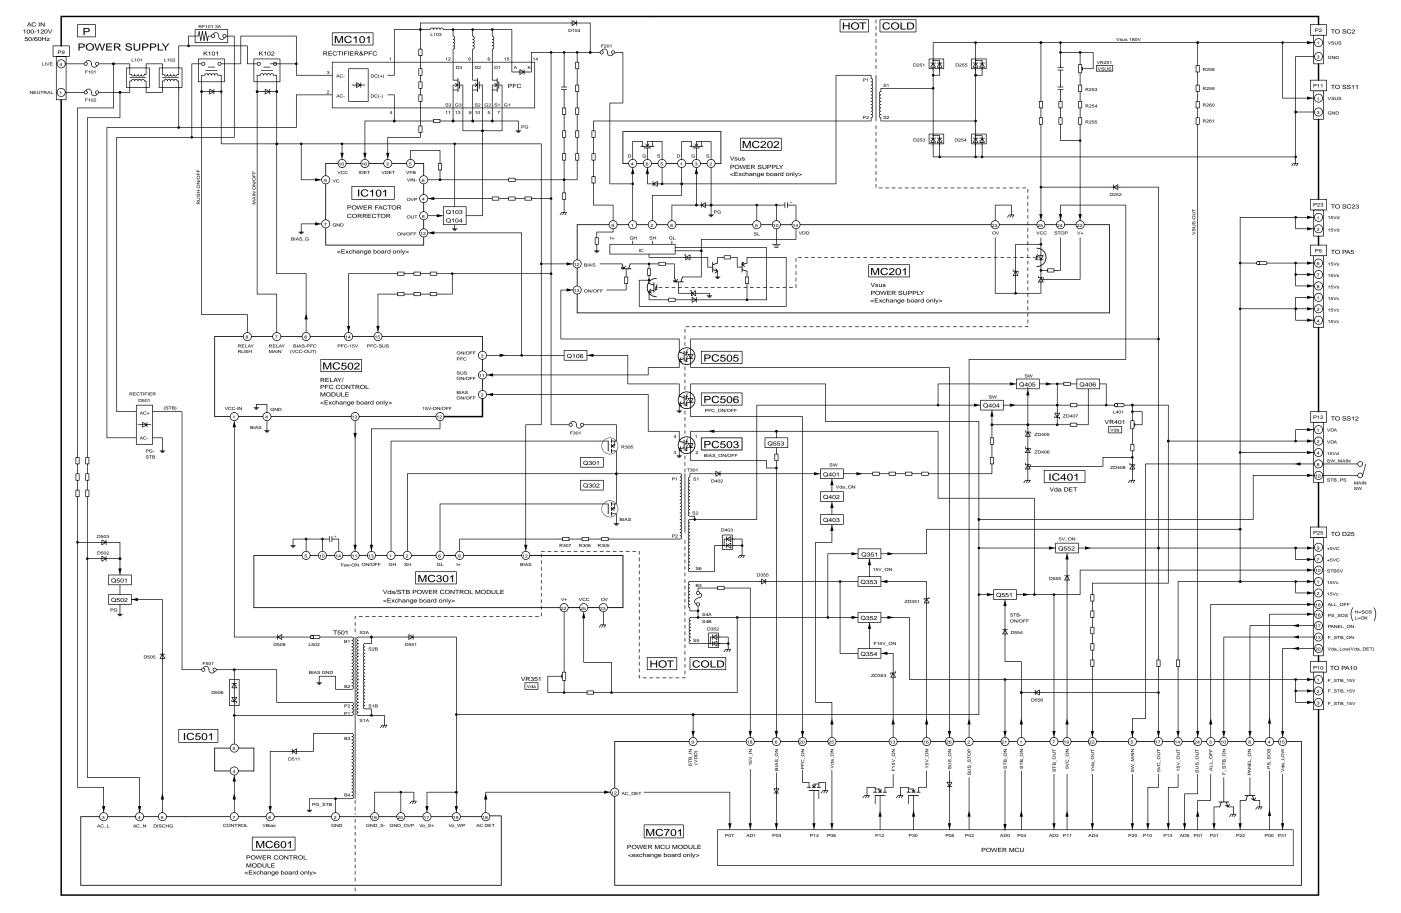

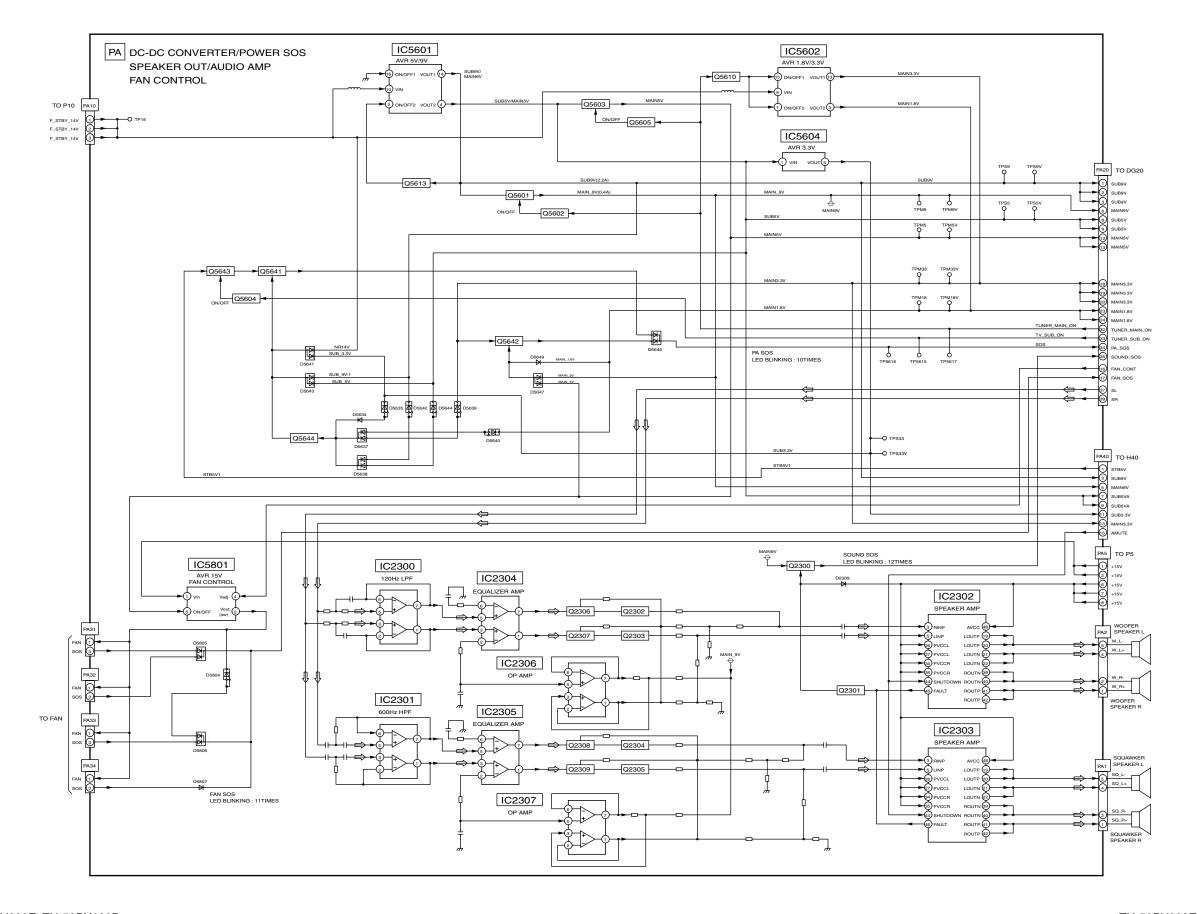

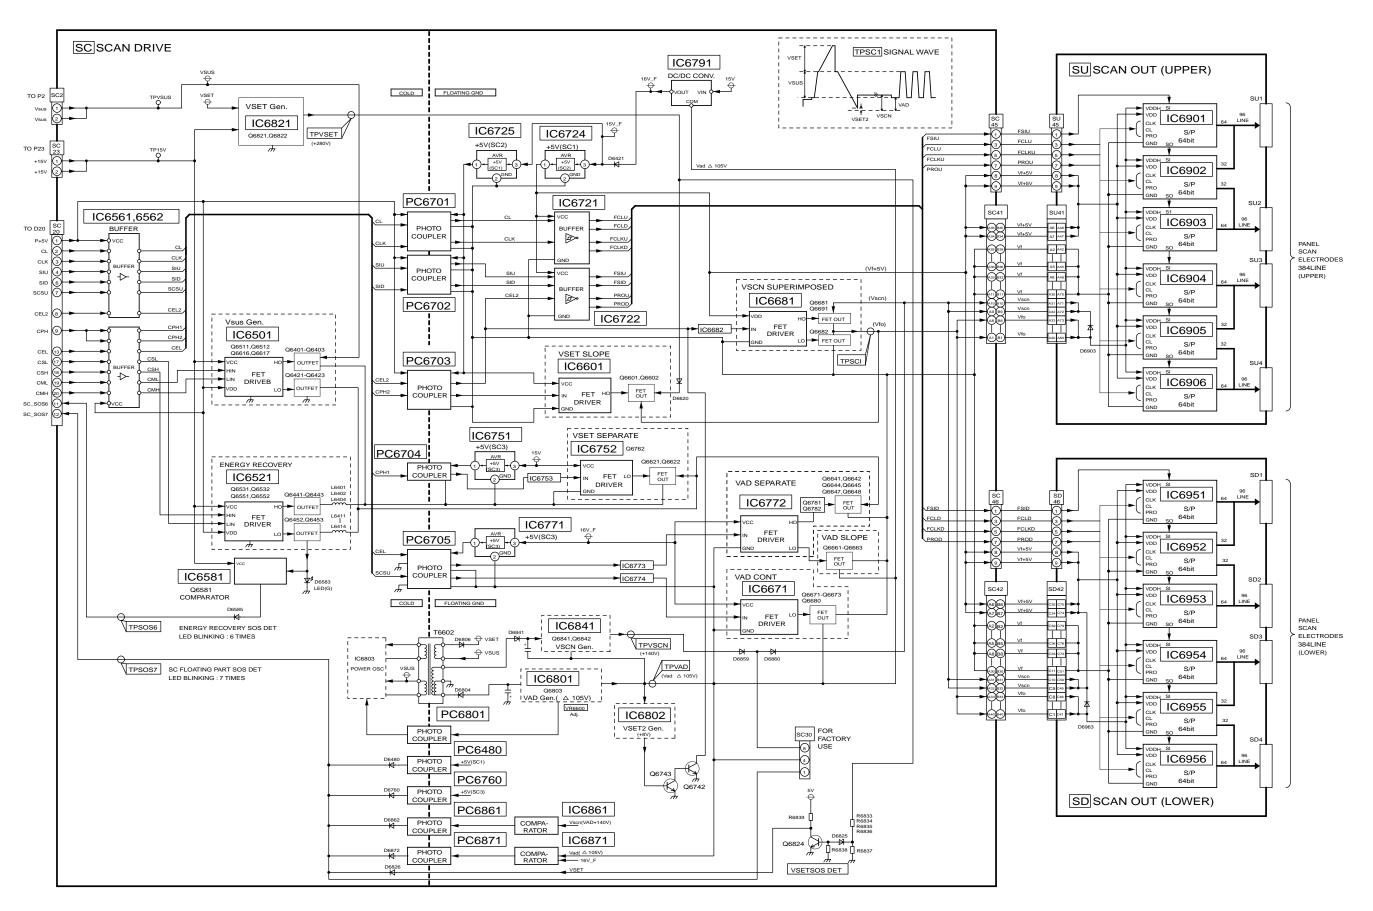


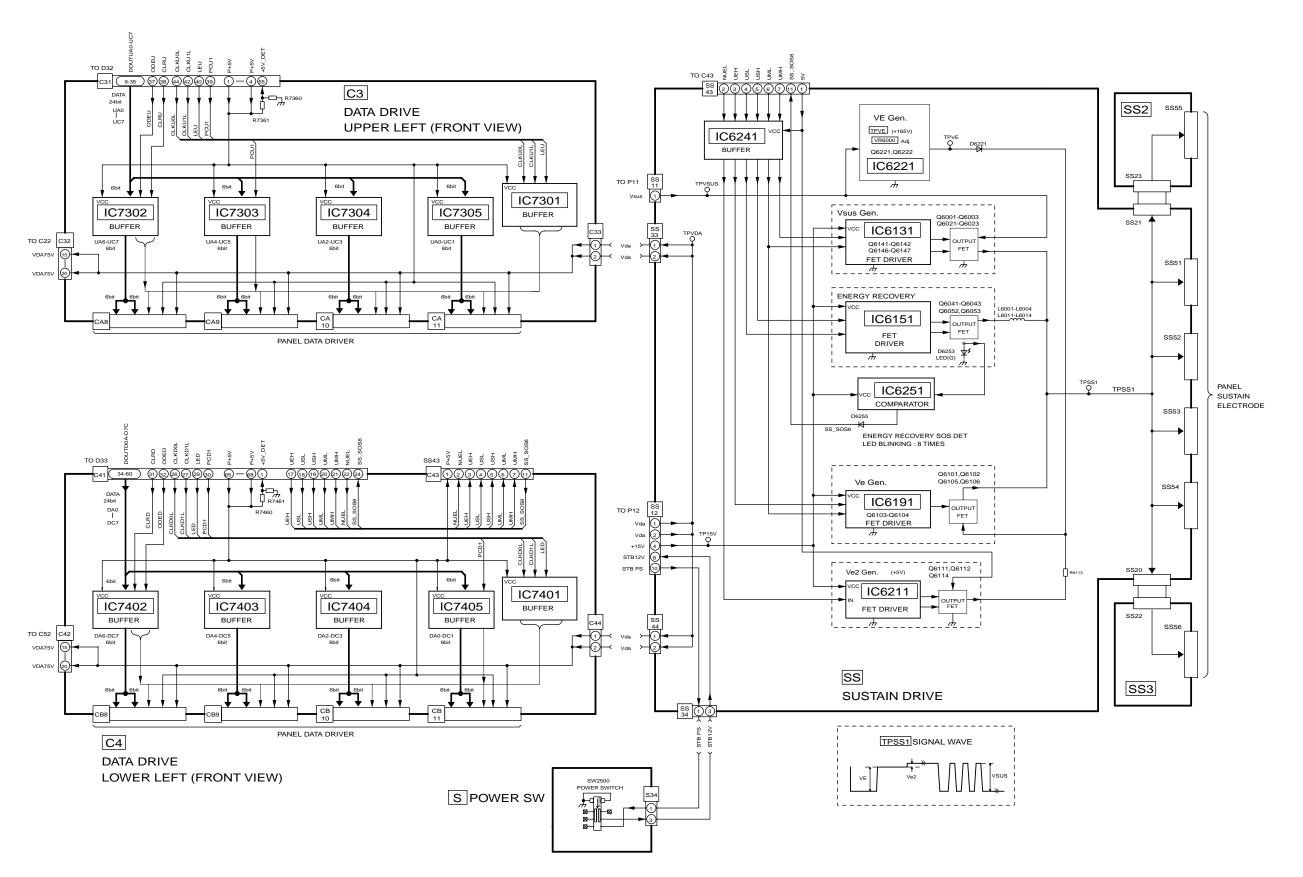

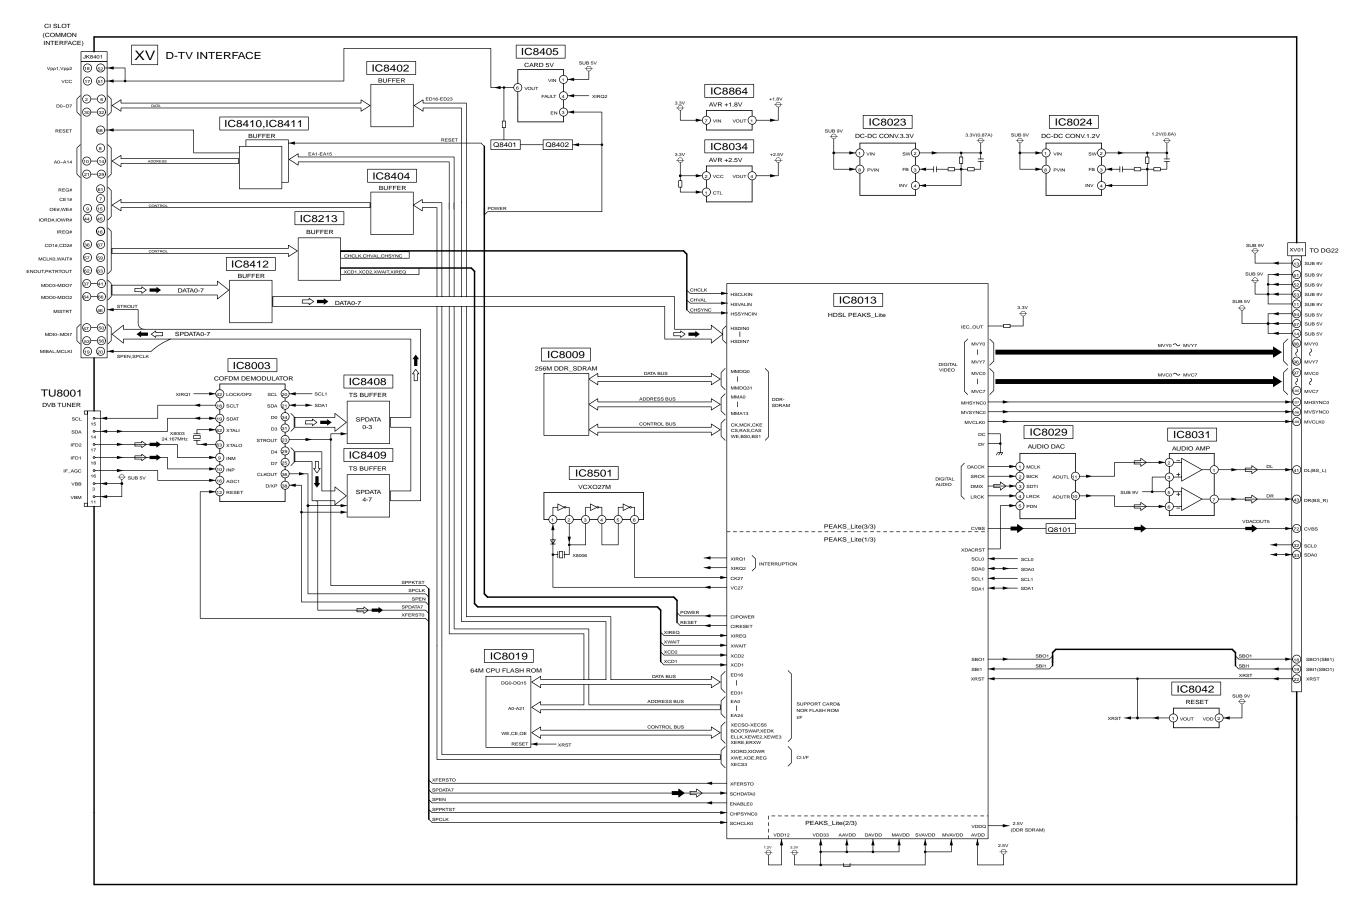




C1-BOARD				
IC				
IC7101	G-1			

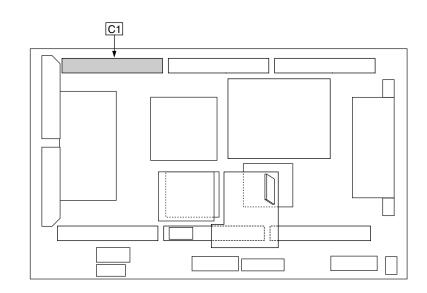


G

C1-BOARD (FOIL SIDE) TXNC11BETB

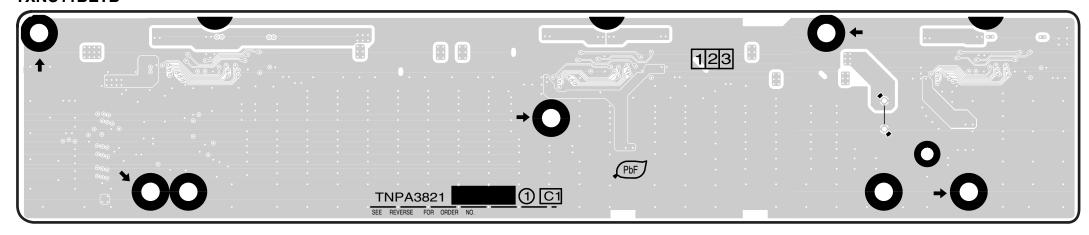


C1-BOARD (COMPONENT SIDE) TXNC11BETB

В

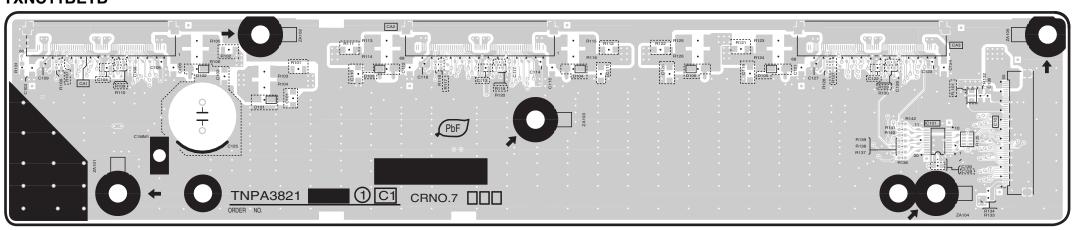


D

TH-50PV600E, TH-50PX600B C1-BOARD TXNC11BETB

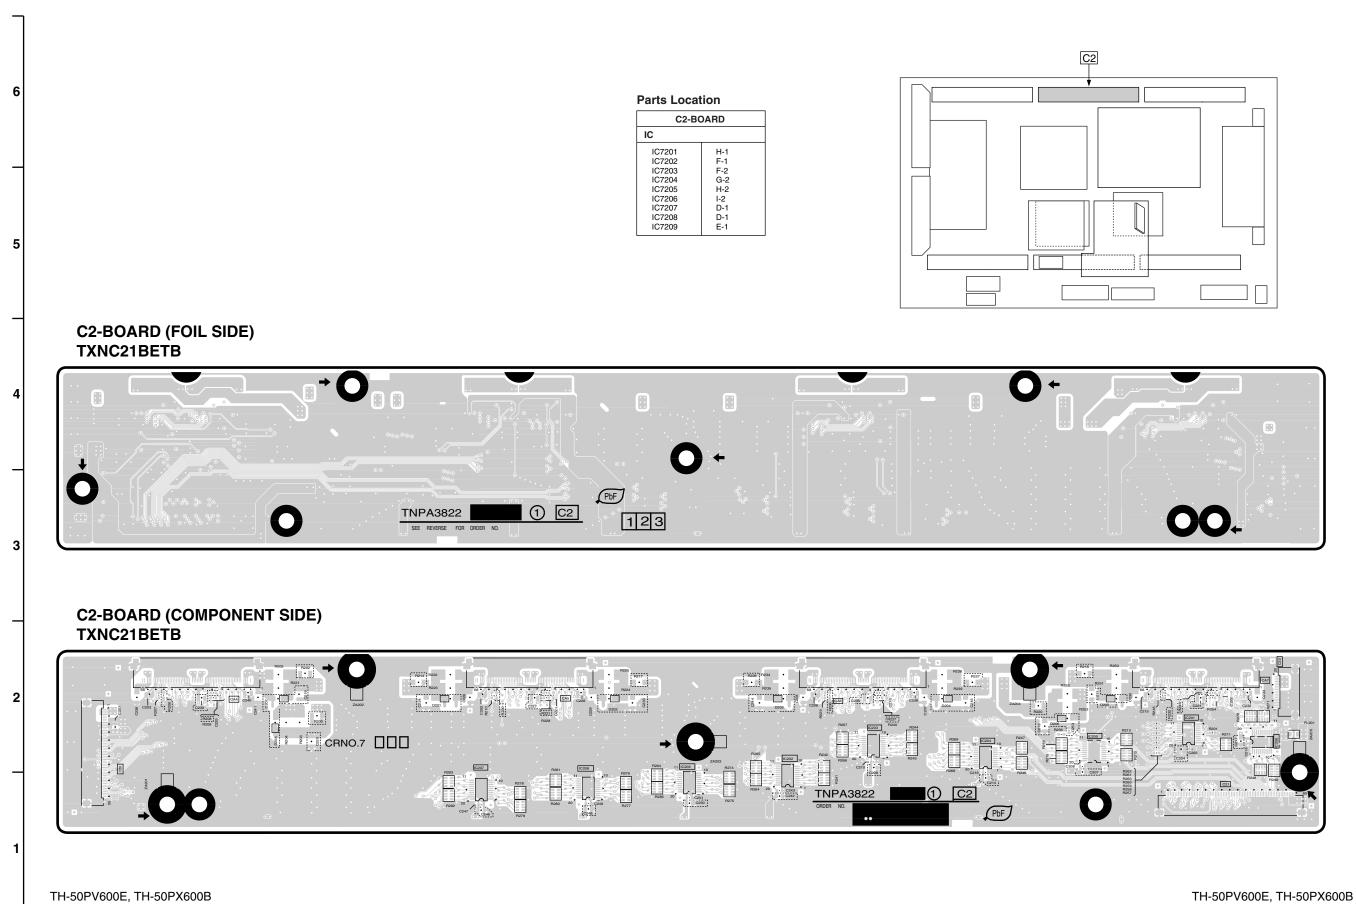


C2-BOARD TXNC21BETB

C2-BOARD TXNC21BETB

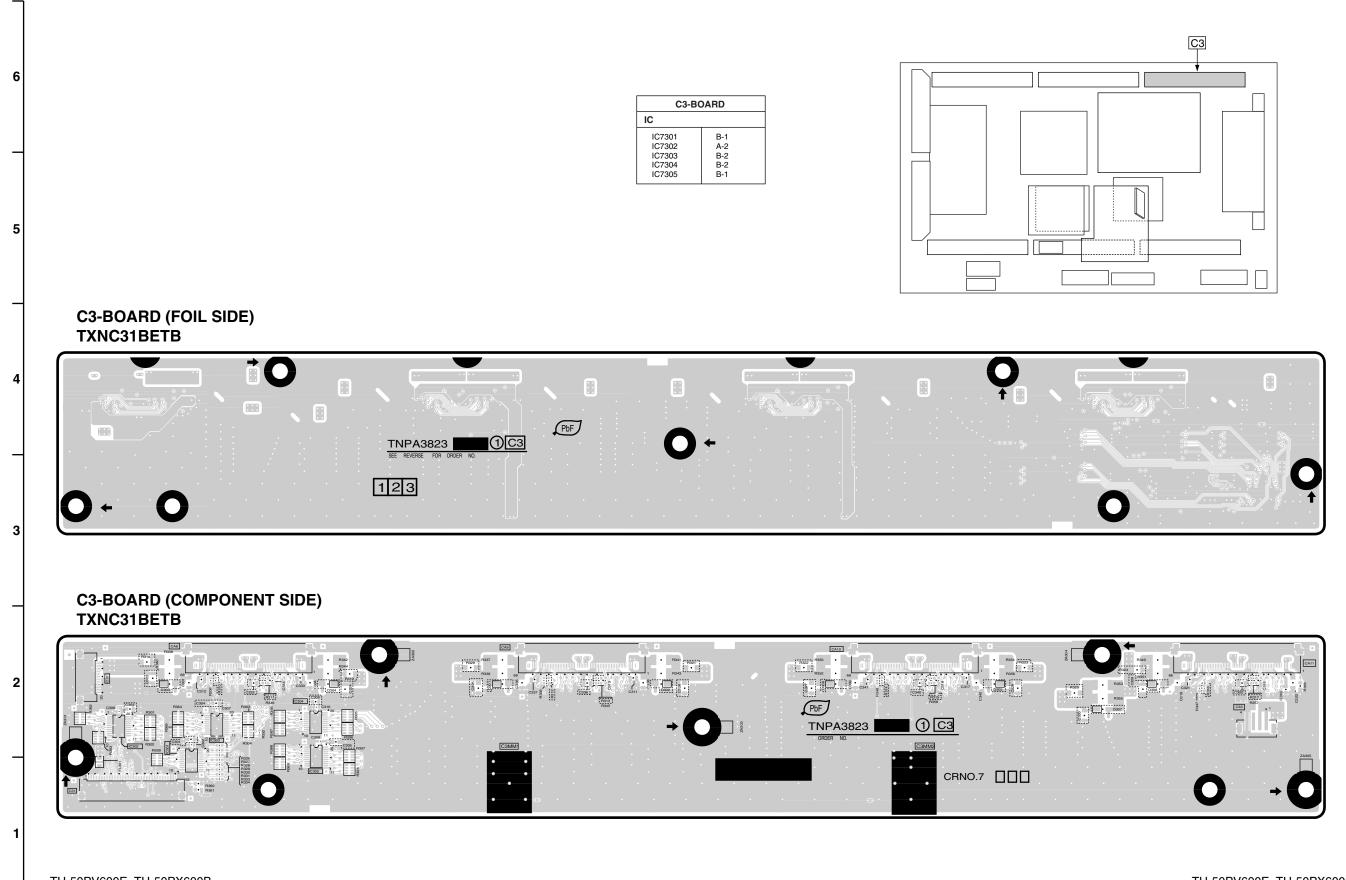


TH-50PV600E, TH-50PX600B
C3-BOARD TXNC31BETB

A | B | C | D | E | F | G | H | I

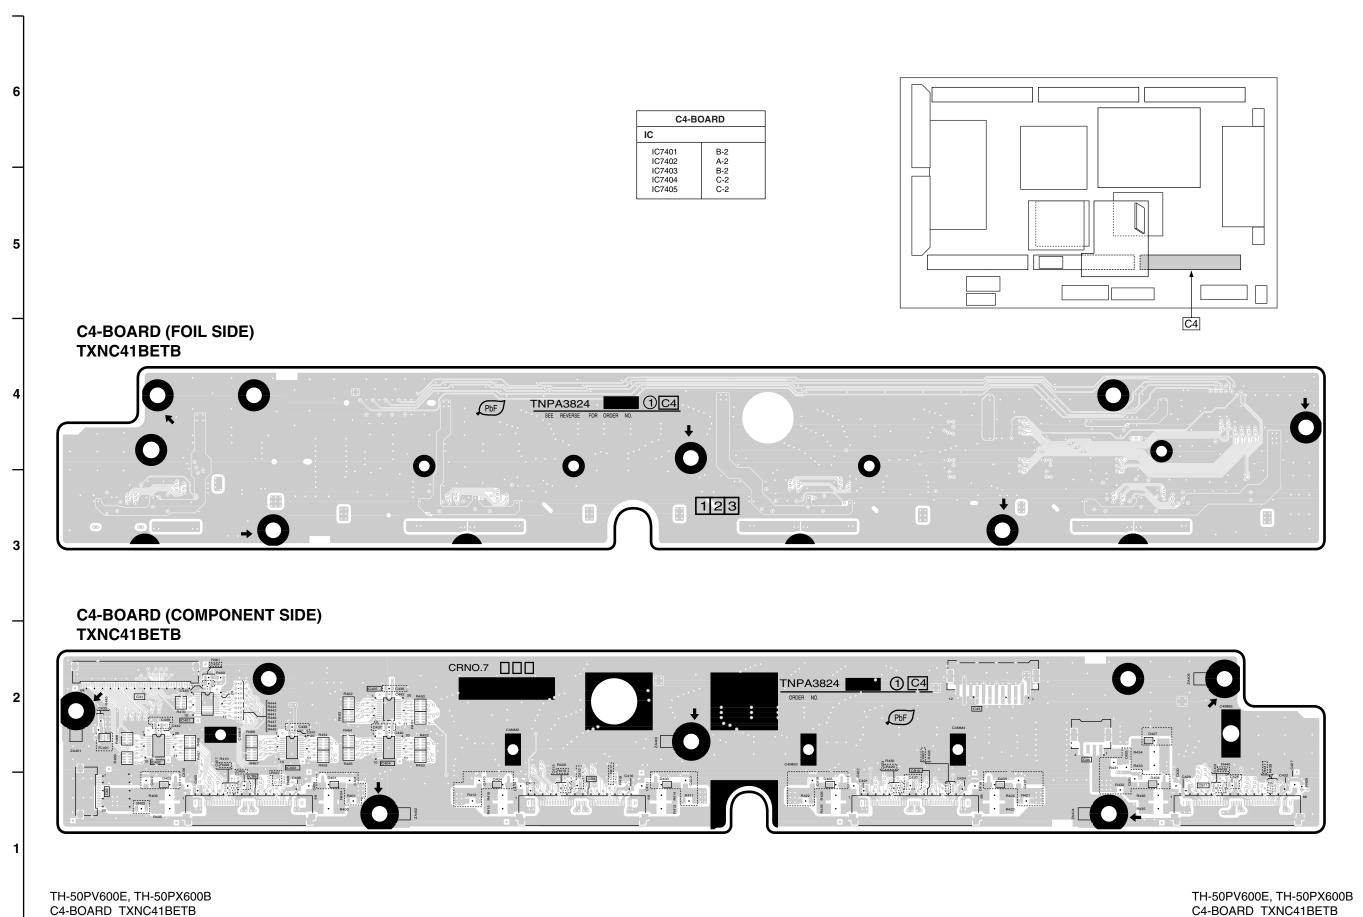


A I B I C I D I E I F I G I




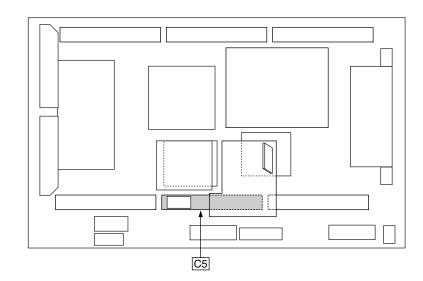

C5-BOARD (FOIL SIDE) TXNC51BETB

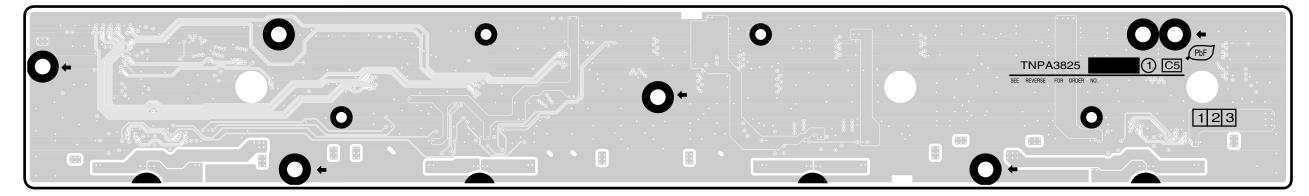

C5-BOARD (COMPONENT SIDE) TXNC51BETB

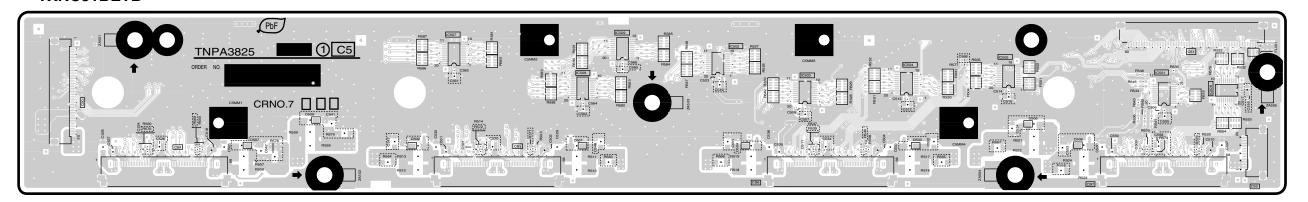

TH-50PV600E, TH-50PX600B C5-BOARD TXNC51BETB TH-50PV600E, TH-50PX600B C5-BOARD TXNC51BETB

Α

С


D


F


G


Н

C5-BOARD TXNC51BE

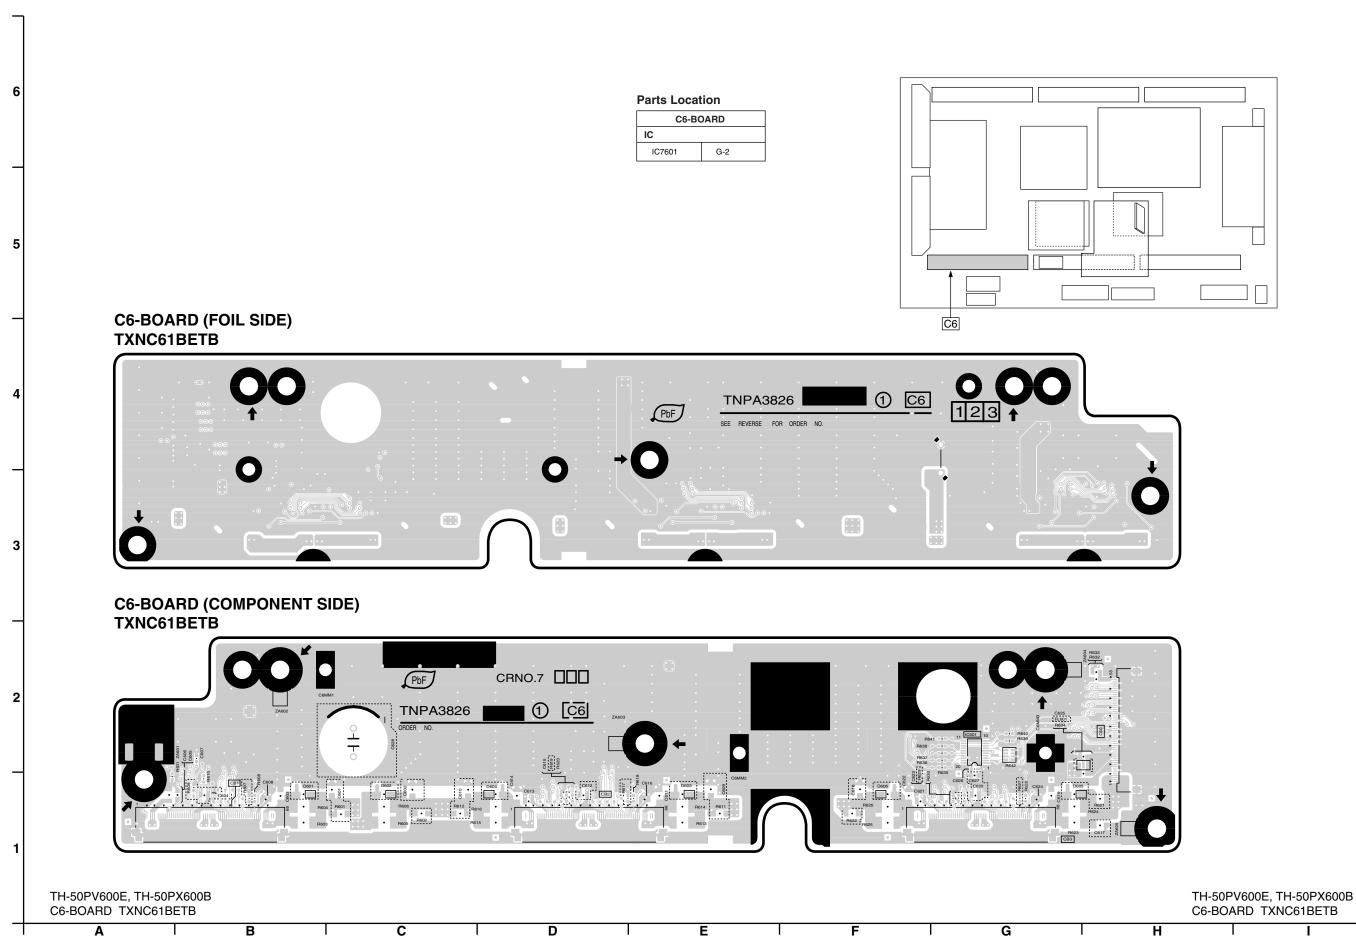

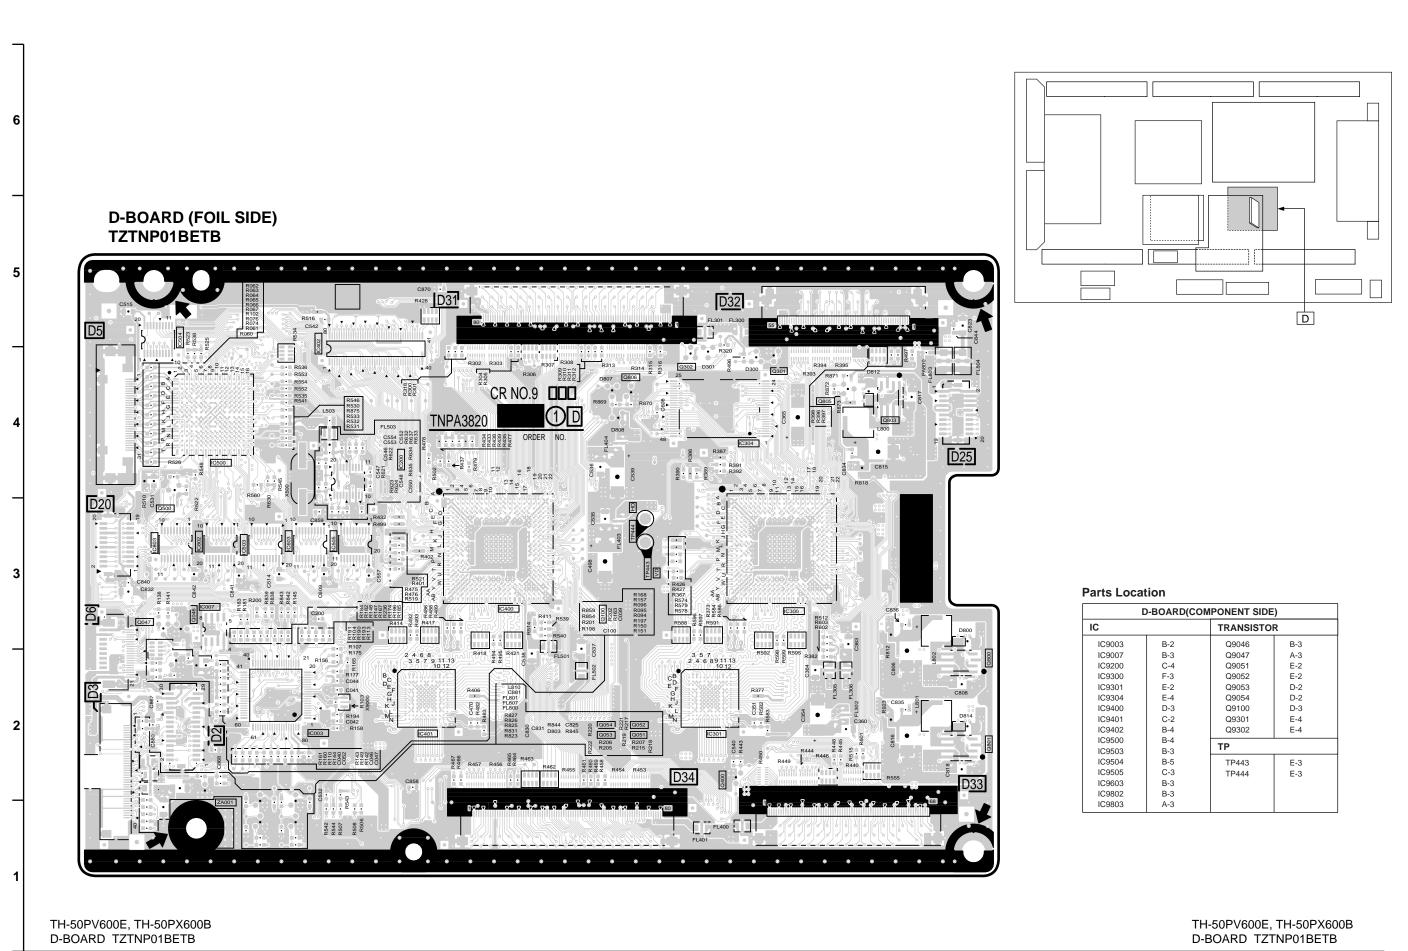

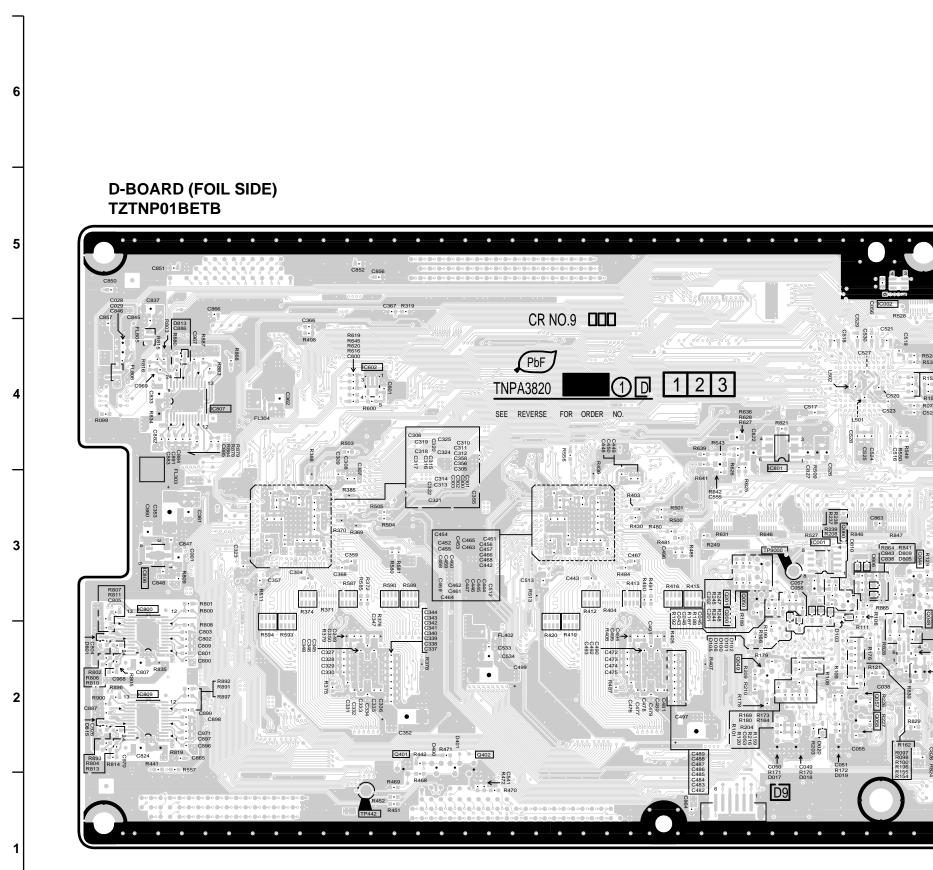

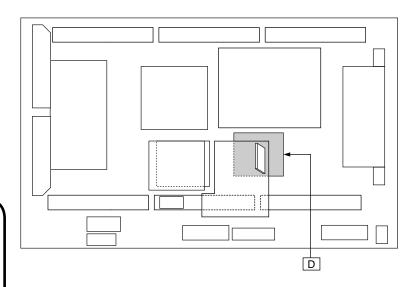

D-BOARD(FOIL SIDE)				
IC IC9001 IC9002 IC9011 IC9602 IC9800 IC9801 IC9806 IC9807 IC9809	F-3 F-5 G-2 C-4 A-3 E-4 A-3 B-4 A-2	Q9200 Q9201 Q9400 Q9401 Q9402 Q9500 Q9800 Q9801 Q9803 Q9805 Q9805	E-3 E-3 E-2 C-2 D-2 A-3 G-2 G-2 F-4 F-4	
TRANSISTO	₹	TP		
Q9044 Q9045 Q9048 Q9049 Q9050 Q9057 Q9058 Q9060	F-3 G-3 F-3 E-2 E-3 F-2 F-2 F-3	TP442 TP9000	C-1 E-3	

TH-50PV600E, TH-50PX600B D-BOARD TZTNP01BETB TH-50PV600E, TH-50PX600B D-BOARD TZTNP01BETB

Α

B

C


D


__

Н

-BOARD 121W 01B

DG-BOARD (COMPONENT SIDE) TNPA3756CA (PV600E) **TNPA3756CG (PX600B)**

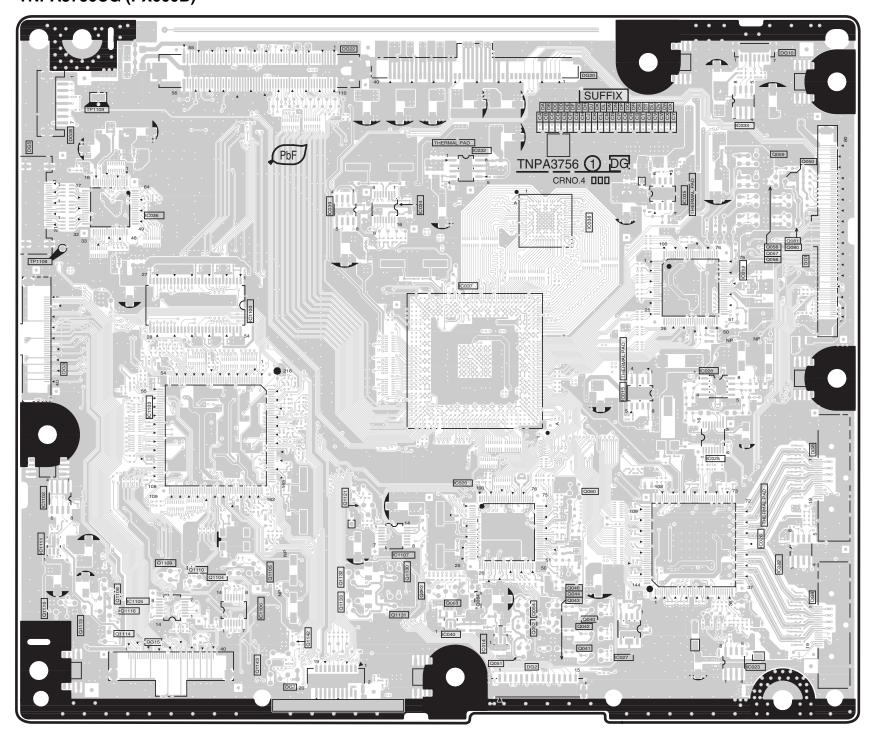

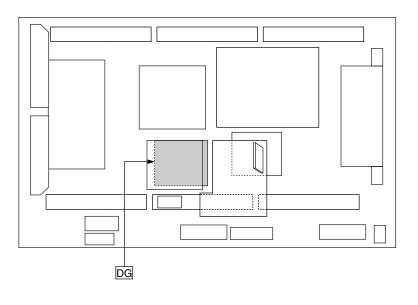

Parts Location

DG-BOARD (COMPONENT SIDE)						
IC		TRANSISTO	R	Q4056	F-4	
IC1100 IC1102 IC1103 IC1105 IC1106 IC1107 IC1111 IC4013	C-4 A-2 B-3 B-2 C-2 D-2 A-2 E-3	Q1104 Q1105 Q1108 Q1109 Q1110 Q1113 Q1114 Q1115	B-2 C-2 B-2 B-2 B-2 A-2 B-2 A-2	Q4057 Q4058 Q4059 Q4060 Q4062 Q4063 Q4064 Q4080	F-4 F-4 F-5 E-2 D-2 D-2 F-4	
IC4014 IC4019 IC4020	D-1 F-4 D-3	Q1116 Q1121 Q1130	B-2 C-2 D-2	Q4081 TP TP1108	F-4	
IC4022 IC4023 IC4025 IC4026	F-2 F-1 F-3 F-2	Q1131 Q1132 Q1133 Q1142	D-2 C-2 C-2 C-1	TP1109	A-5	
IC4027 IC4028 IC4032 IC4033	E-1 F-3 D-5 F-5	Q1143 Q4040 Q4041 Q4042	C-1 E-2 E-1 E-2			
IC4034 IC4035 IC4036 IC4037	D-4 E-4 B-4 D-4	Q4043 Q4044 Q4046 Q4050	E-2 E-2 E-2 F-5			
IC4038 IC4039 IC4040	E-4 C-4 D-2	Q4051 Q4052 Q4054	D-1 D-2 D-2			

TH-50PV600E DG-BOARD TNPA3756CA


TH-50PX600B DG-BOARD TNPA3756CG


TH-50PV600E DG-BOARD TNPA3756CA

TH-50PX600B DG-BOARD TNPA3756CG

G

DG-BOARD (FOIL SIDE) TNPA3756CA (PV600E) TNPA3756CG (PX600B)

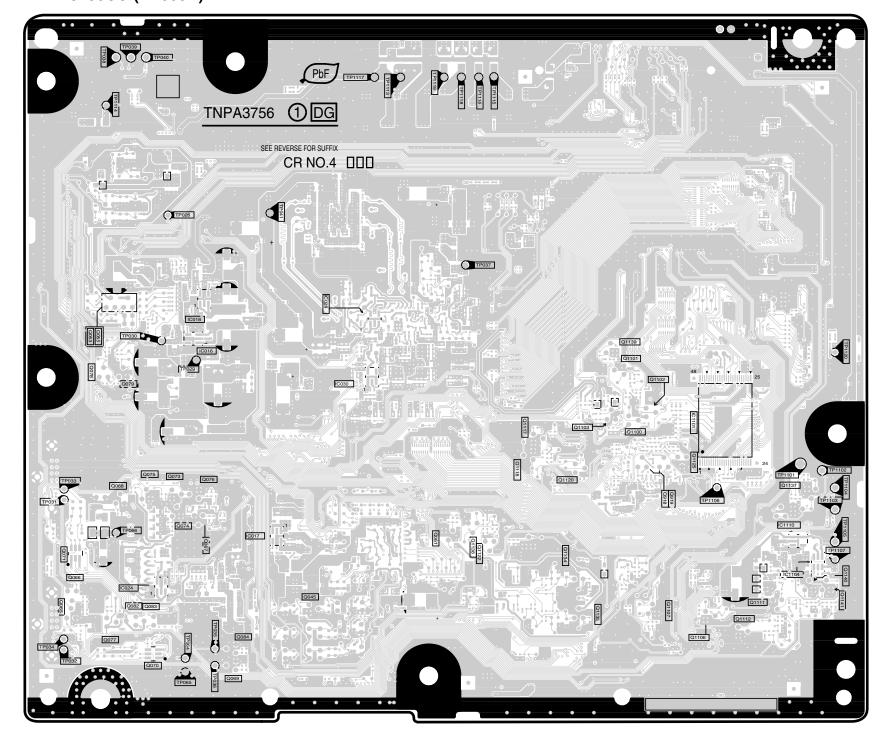

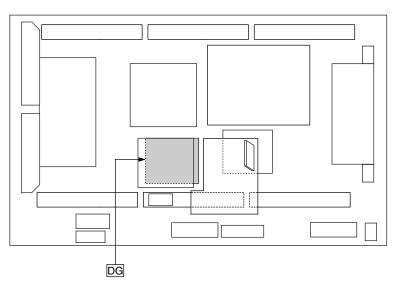

Parts Location

DG-BOARD (FOIL SIDE)					
IC		Q4045	C-2	TP	
IC1101 IC1104 IC1110 IC4016 IC4017 IC4018 IC4024 IC4029 IC4030	E-3 F-2 F-2 B-3 B-2 B-4 B-2 C-4 C-3	Q4053 Q4055 Q4061 Q4065 Q4066 Q4067 Q4068 Q4069 Q4070 Q4071	A-3 A-3 D-2 A-2 A-2 B-2 B-1 B-1 A-2	TP1101 TP1102 TP1103 TP1104 TP1105 TP1106 TP1107 TP1113 TP1114	F-3 F-3 F-2 F-2 F-2 F-2 C-5 B-5
TRANSISTO	R	Q4073	B-3	TP1115 TP1116	D-5 D-5
Q1100 Q1101 Q1102 Q1103 Q1106 Q1107 Q1111 Q1112 Q1117 Q1118 Q1120 Q1122 Q1125 Q1134 Q1135 Q1137 Q1138 Q1139 Q1140 Q1141	E-3 E-3 E-3 E-3 E-1 E-2 F-2 D-3 D-3 E-3 D-2 E-3 E-2 E-2 F-2 D-2 E-3 F-2 F-2	Q4074 Q4075 Q4076 Q4077 Q4078 Q4079 Q4082 Q4083 Q4084 Q4918 Q4919	B-2 B-3 B-3 B-1 A-3 B-3 B-2 B-2 B-1 E-2	TP1117 TP1118 TP1119 TP1120 TP4028 TP4029 TP4030 TP4031 TP4032 TP4033 TP4034 TP4035 TP4036 TP4037 TP4038 TP4039 TP4040 TP4041 TP4064 TP4065 TP4066	C-5 D-5 D-5 F-3 B-4 B-3 B-3 A-2 A-4 A-3 A-1 B-1 B-1 D-4 B-5 B-5 C-4 B-1 B-1 B-1 B-1

TH-50PV600E DG-BOARD TNPA3756CA TH-50PX600B DG-BOARD TNPA3756CG TH-50PV600E DG-BOARD TNPA3756CA

TH-50PX600B DG-BOARD TNPA3756CG

С


D

_

_

G

3756CA DG-BOARD TNPA379

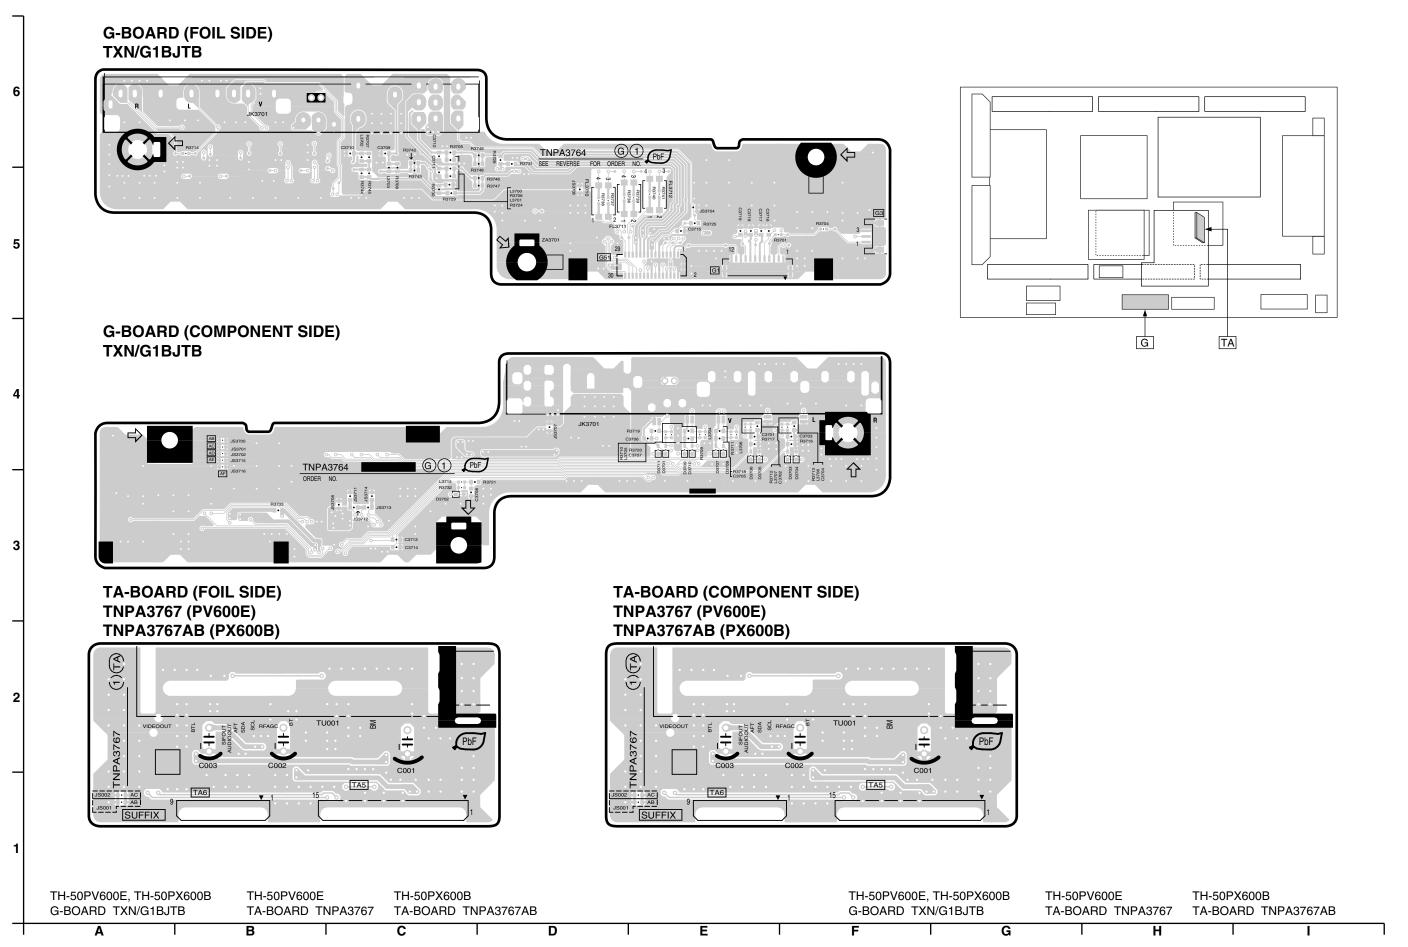



3










TH-50PV600E K-BOARD TXN/K1BJTE TH-50PX600B K-BOARD TXN/K1BJTB

K-BOARD (FOIL SIDE) TXN/K1BJTE (PV600E) TXN/K1BJTB (PX600B)

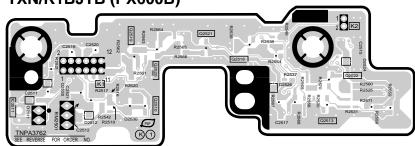


K-BOARD (COMPONENT SIDE) TXN/K1BJTE (PV600E) TXN/K1BJTB (PX600B)

GK-BOARD (FOIL SIDE)


GK-BOARD (COMPONENT SIDE)

TXNGK1BJTB


TXNGK1BJTB

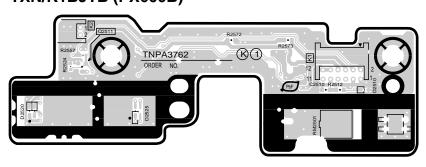

HC-BOARD (FOIL SIDE)



HC-BOARD (COMPONENT SIDE) TNPA3766



S-BOARD (FOIL SIDE) TXN/S1BJTB

HC




GΚ

S

K

S-BOARD (COMPONENT SIDE) TXN/S1BJTB



TH-50PV600E, TH-50PX600B GK-BOARD TXNGK1BJTB **HC-BOARD TNPA3766** S-BOARD TXN/S1BJTB

G

TH-50PV600E K-BOARD TXN/K1BJTE


Н


TH-50PX600B K-BOARD TXN/K1BJTB

D






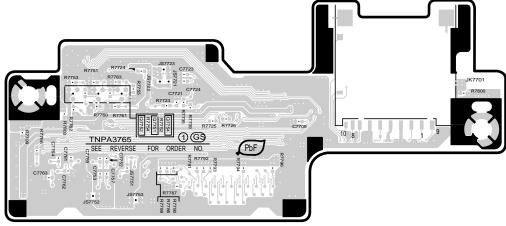


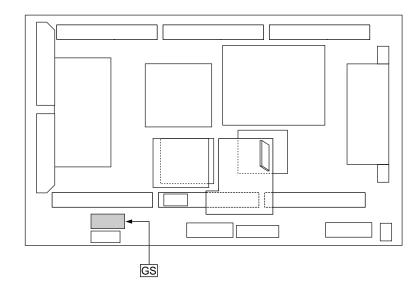


GS-BOARD				
IC				
IC7751	D-2			
TRANSISTOR				
Q7751 Q7752 Q7753 Q7754	B-5 B-5 B-2 B-5			

GS-BOARD (COMPONENT SIDE) TXNGS1BETB

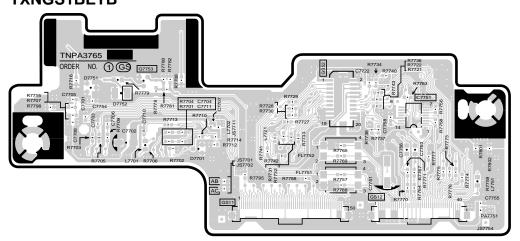

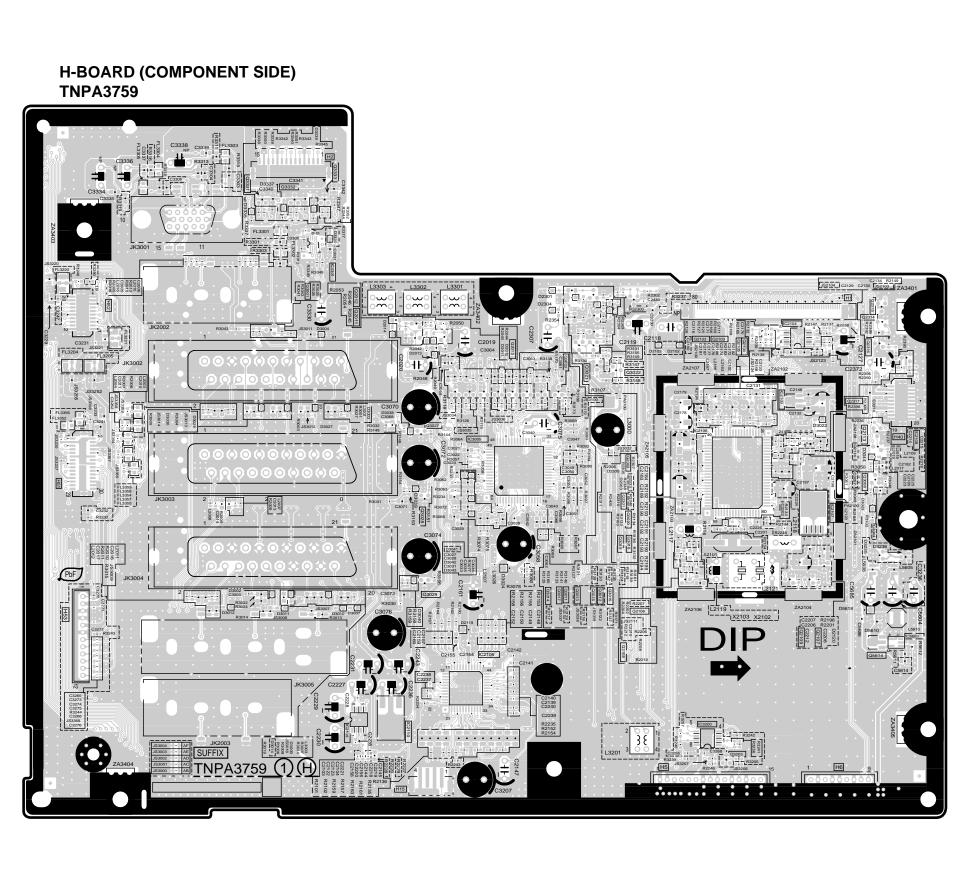


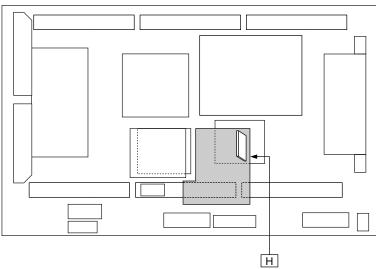

H	H-BOARD (COMPONENT SIDE)					
IC		Q2316	F-4			
IC2103	F-4	Q2317	F-4			
IC2104	F-4	Q3001	C-5			
IC2105	D-2	Q3008	F-3			
IC2106	E-4	Q3011	D-3			
IC2107	F-3	Q3012	E-3			
IC2108	G-4	Q3013	D-3			
IC2109	C-2	Q3014	D-3			
IC2110	C-2	Q3015	E-3			
IC3005	D-4	Q3016	E-3			
IC3200	E-2	Q3017	D-3			
IC3301	C-5	Q3018	E-3			
IC5603	G-2	Q3019	E-3			
		Q3020	E-3			
TRANSISTO	₹	Q3021	D-4			
Q2011	C-4	Q3022	E-4			
Q2012	C-5	Q3023	D-4			
Q2013	C-4	Q3027	C-4			
Q2102	E-4	Q3028	C-3			
Q2103	E-4	Q3029	C-3			
Q2104	E-4	Q3203	E-2			
Q2105	E-4	Q3331	B-5			
Q2106	E-2	Q3332	B-5			
Q2107	F-2	Q3333	C-5			
Q2108	E-2	Q5614	F-2			
Q2109	F-2					
Q2113	F-4					
Q2114	F-4					
Q2300	E-4					
Q2301	E-3					
Q2302	E-3					
Q2314	F-4					
Q2315	F-5					

TH-50PV600E, TH-50PX600B H-BOARD TNPA3759 TH-50PV600E, TH-50PX600B H-BOARD TNPA3759

A I B I C I D I E I F I G

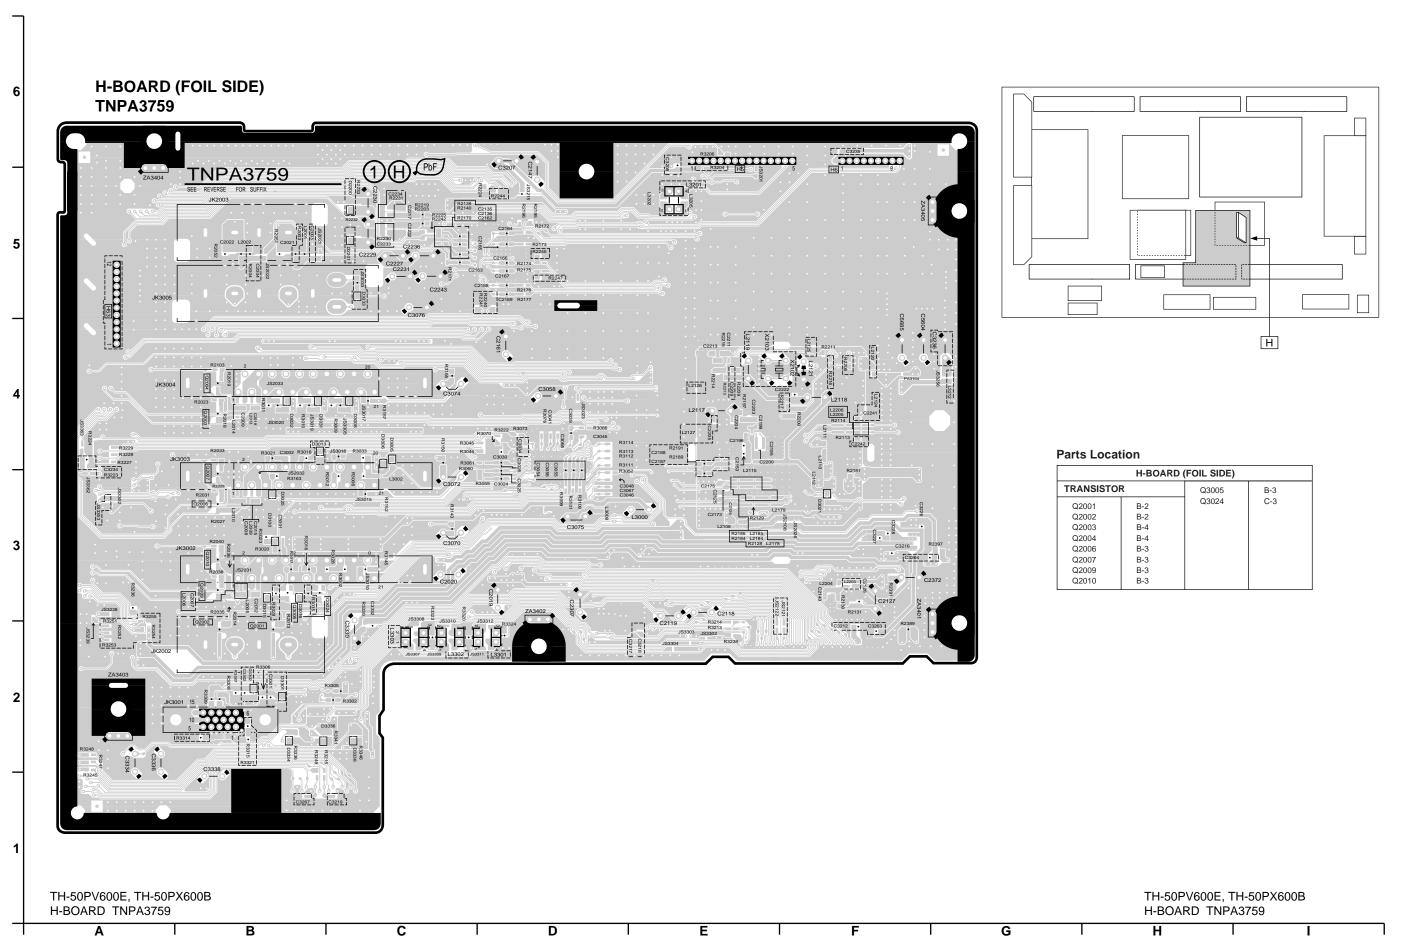

P-BOARD (COMPONENT SIDE) ETXMM610MEF KbC ∧-0 ▼ M 陪雷充非 COLD 1612 1613 1613 ====== 6131 ==<u>#</u>12== zar === ozar P23 1 P10 6 1 3 === 1859 === 1816 ====== 1ETO P12 6787 1832 1631 1029 ========= 15 to * |----|K| |----| \times \times 8121 C125 8220

0 I G ≥zaī

"CAUTION-FOR CONTINUED PROTECTION AGAINST RISK OF FIRE, REPLACE ONLY NITH SAME TYPE AND RATING OF FUSES."

DOUBLE POLE (MEUTRAL FUSING.

TH-50PV600E, TH-50PX600B
P-BOARD ETXMM610MEF


A | B | C | D | E | F | G | H | I

悪〇張

P-BOARD (FOIL SIDE) ETXMM610MEF 9523 6528 0928 T928 C251 OC INE CIRCUIT CAUTION DESA COLD TH-50PV600E, TH-50PX600B

TH-50PV600E, TH-50PX600B
P-BOARD ETXMM610MEF

A B C D E F G H I I

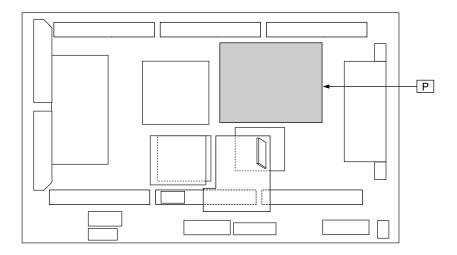



	P-BOARD (FOIL SIDE)				
IC		TRANSISTO	R		
IC101 IC401 IC501	H-3 F-5 B-3	Q103 Q104 Q106 Q301 Q302	H-2 H-2 H-2 H-3 G-3		
MC101 MC201 MC202 MC301 MC502 MC601 MC701	G-3 C-3 D-3 F-3 C-2 C-4 H-5	Q351 Q352 Q353 Q354 Q401 Q402 Q403 Q404 Q405	F-5 G-5 F-5 F-4 G-4 E-4 G-5 F-5		
рното сои	PLER	Q406	E-4		
PC503 PC505 PC506	C-4 C-4 H-4	Q501 Q502 Q551 Q552	B-3 B-3 G-5 G-6		
VOLUME		Q553	G-6		
VR251 VR351 VR401	C-5 F-4 E-5				

Parts Location

P-BOARD (COMPONENT SIDE)					
IC		рното сои	PLER	VOLUME	
IC101 IC401 IC501	B-3 E-5 H-3	PC503 PC505 PC506	G-4 G-4 B-4	VR251 VR351 VR401	H-5 D-4 E-5
MODULE		TRANSISTOR			
MC101 MC201 MC202 MC301 MC502 MC601 MC701	C-3 G-3 E-3 D-3 G-2 G-4 B-5	Q301 Q302 Q401 Q402 Q404 Q405 Q501	C-3 C-3 E-5 D-4 C-5 D-5 H-3		

PA-BOARD (COMPONENT SIDE) TXNPA1BETB

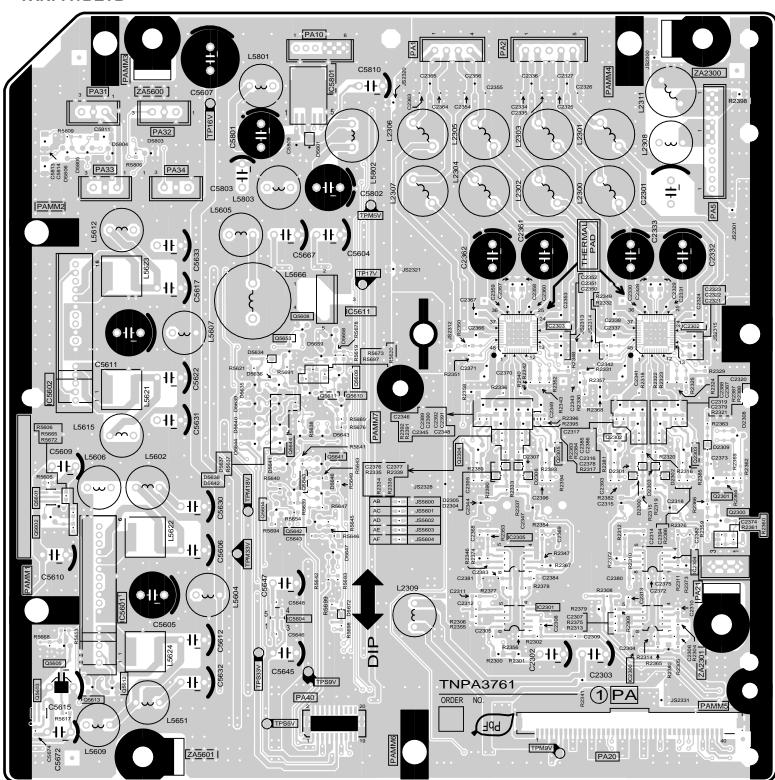

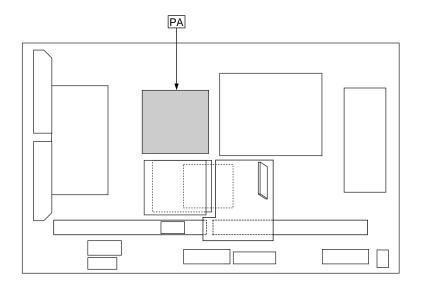

Parts Location

PA-BOARD (COMPONENT SIDE)					
IC	TRANSISTOR			TP	
IC2300	E-2	Q2300	F-3	TP16V	B-5
IC2301	D-2	Q2301	F-3	TP17V	C-4
IC2302	E-4	Q2302	E-2	TPM5V	C-5
IC2303	E-4	Q2303	E-3	TPM18V	B-3
IC2304	E-2	Q2304	D-3	TPM33V	B-2
IC2305	D-3	Q2305	E-3	TPS5V	C-1
IC5601	B-2	Q5601	A-3	TPS9V	C-2
IC5602	A-3	Q5602	A-3	TPS33V	C-2
IC5604	C-2	Q5603	A-1		
IC5611	C-4	Q5604	C-3		
IC5801	C-5	Q5605	A-2		
		Q5608	C-4		
		Q5609	C-4		
		Q5610	C-3		
		Q5611	C-3		
		Q5612	B-1		
		Q5613	A-1		
		Q5641	C-3		
		Q5642	C-3		
		Q5643	C-3		
		Q5644	C-3		
		Q5653	C-4		
1	1	1	1	- 1	1

TH-50PV600E, TH-50PX600B PA-BOARD TXNPA1BETB

TH-50PV600E, TH-50PX600B PA-BOARD TXNPA1BETB

Α

3

3


 $\overline{\mathbf{c}}$


D

Е

F

G

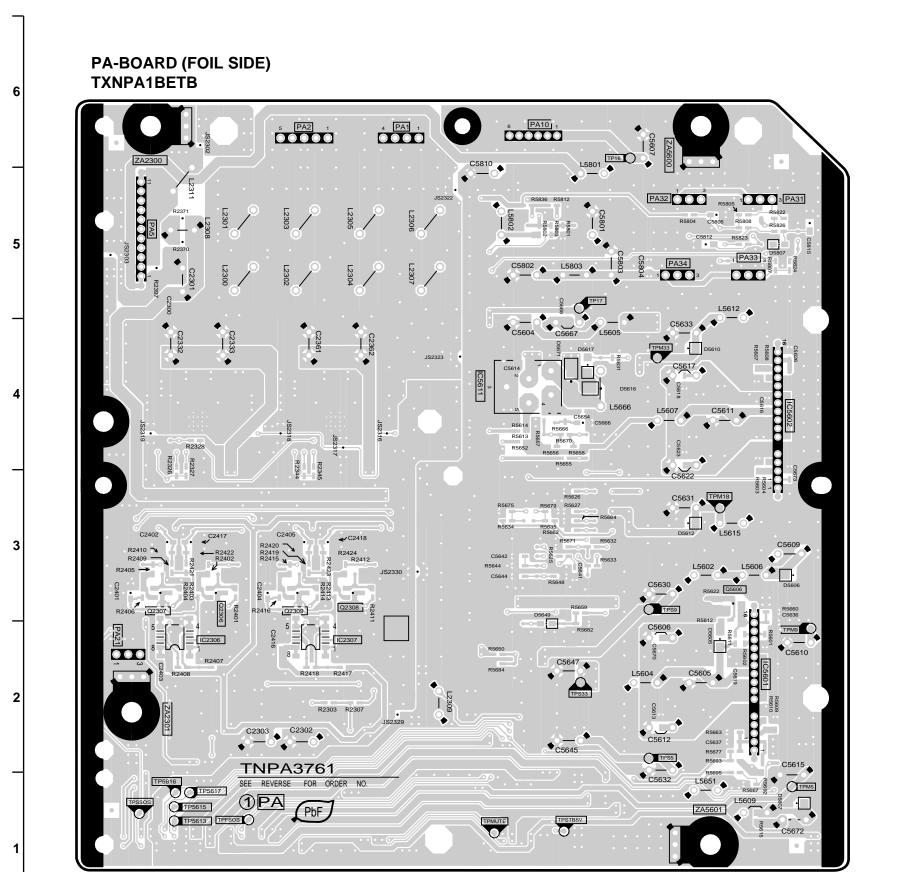

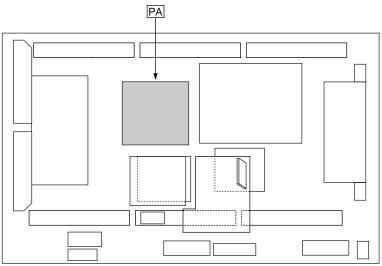

	PA-BOARD (FOIL SIDE)				
IC		TP			
IC2306 IC2307 IC5601 IC5602 IC5611	B-2 C-2 E-2 F-4 D-4	TP16 TP17 TP5613 TP5615 TP5616 TP5617	D-6 D-5 B-1 B-1 A-1 B-1		
Q2306 Q2307 Q2308 Q2309 Q5606	B-3 A-2 C-3 B-3 E-3	TPFSOS TPM5 TPM9 TPM18 TPM33 TPMUTE TPS5 TPS9 TPS33 TPSSOS TPSTB5V	B-1 F-2 F-2 E-3 E-4 D-1 E-2 E-3 D-2 A-1 D-1		


Н

TH-50PV600E, TH-50PX600B PA-BOARD TXNPA1BETB

TH-50PV600E, TH-50PX600B PA-BOARD TXNPA1BETB

A B C D E F G


SC-BOARD (COMPONENT SIDE) TXNSC1BETB

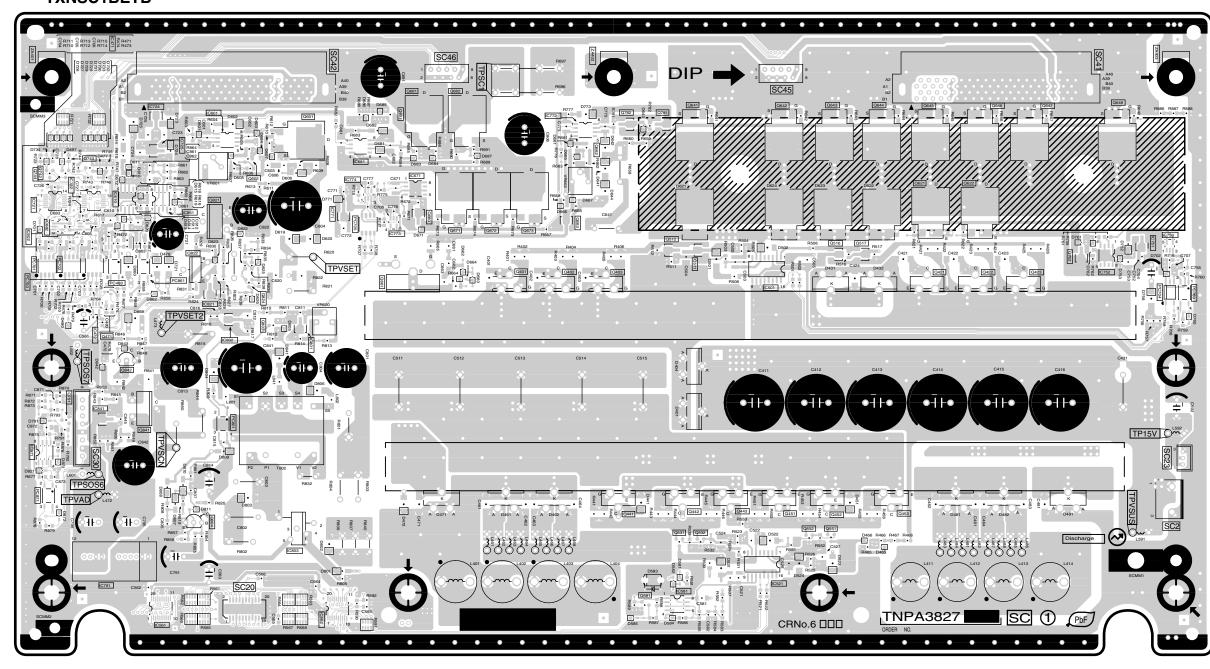

TH-50PV600E, TH-50PX600B SC-BOARD TXNSC1BETB

TH-50PV600E, TH-50PX600B SC-BOARD TXNSC1BETB

SC-BOARD (FOIL SIDE) TXNSC1BETB

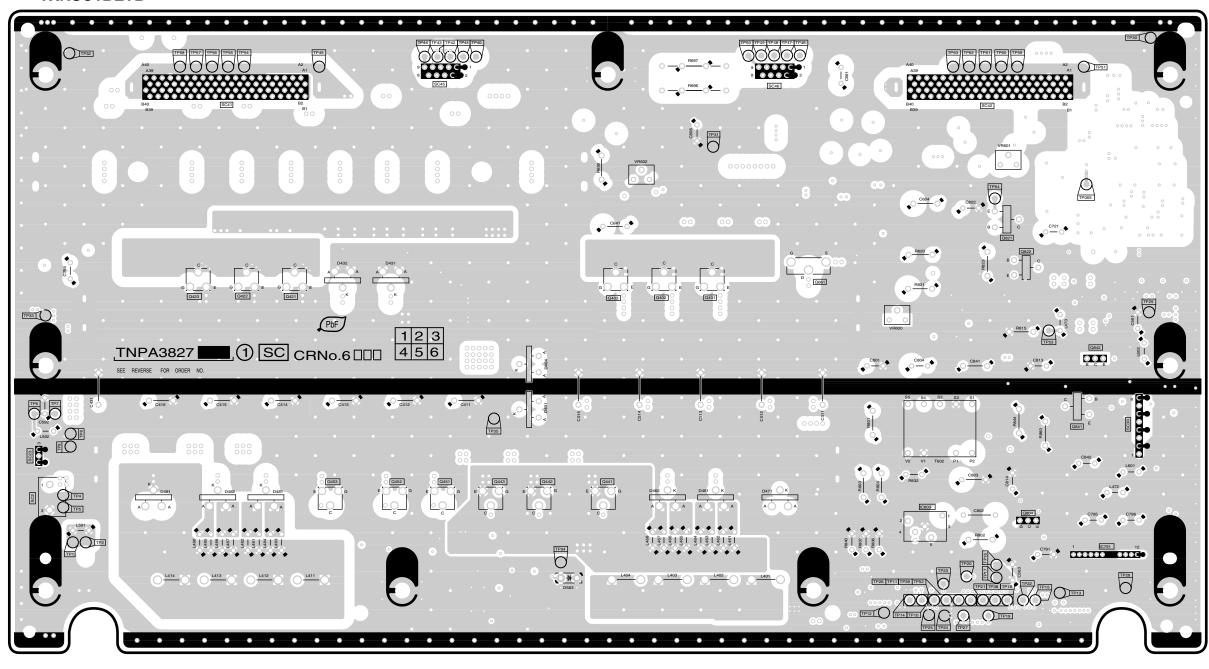

TH-50PV600E, TH-50PX600B SC-BOARD TXNSC1BETB TH-50PV600E, TH-50PX600B SC-BOARD TXNSC1BETB

Α

B

С


D

_

1

G


JC-BOARD TANSOT

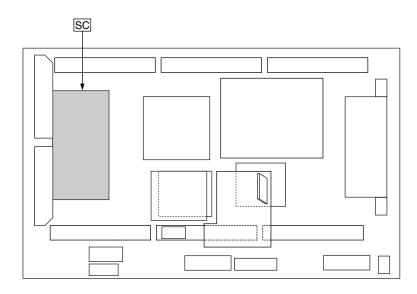


		SC-BOARD	(FOIL SIDE)		
IC		TP		TP41	D-5
IC6791 IC6803	H-2 G-2	TP1 TP2 TP4	B-2 B-2 A-2	TP42 TP43 TP44	D-5 D-5 D-5
TRANSISTO	3	TP5	A-2	TP45	C-5
Q6401 Q6402 Q6403 Q6421 Q6422 Q6423 Q6441 Q6442 Q6443 Q6451 Q6452 Q6453 Q6804 Q6821 Q6822 Q6841 Q6842	F-4 E-4 E-4 C-4 B-4 E-2 E-2 D-2 D-2 D-2 C-2 H-4 H-4 H-3 H-3	TP6 TP7 TP8 TP9 TP10 TP11 TP12 TP13 TP14 TP15 TP16 TP17 TP18 TP19 TP20 TP21 TP22 TP23 TP24 TP25	A-3 A-3 B-3 G-1 G-2 G-1 H-2 G-1 H-2 H-2 H-2 H-2 H-2 H-2 G-2 G-1 G-2 G-1 G-1 G-1	TP46 TP47 TP48 TP49 TP50 TP51 TP52 TP53 TP54 TP55 TP56 TP59 TP60 TP61 TP62 TP63 TP64 TP65 TP65 TP65 TP68	F-5 F-5 F-5 F-5 H-5 G-2 H-3 C-5 B-5 H-5 H-5 G-5 H-4 H-4 B-5 B-5
		TP26	G-2	VOLUME	
		TP27 TP28 TP29 TP30 TP31 TP32 TP33 TP34 TP35 TP38 TP38 TP39 TP40	G-1 H-2 I-4 I-5 F-5 B-5 A-3 E-2 D-3 H-2 G-2	VR6600 VR6601 VR6602	G-3 H-5 E-4

Parts Location

		s	C-BOARD (C	OMPONENT SID	E)		
IC		РНОТО СО	JPLER	Q6601	C-5	TP	
IC6471 IC6472 IC6501 IC6521 IC6561 IC6562 IC6581 IC6602 IC6601 IC6671 IC6681 IC6682 IC6721 IC6722 IC6724 IC6725 IC6725 IC6774 IC6771 IC6772 IC6774 IC6791 IC6801 IC6801 IC6801 IC6791 IC6791 IC6771 IC6772 IC6773 IC6771 IC6801 IC6801 IC6801 IC6801	B-5 B-3 F-4 F-2 B-1 C-1 F-2 B-5 A-4 D-4 C-4 A-4 A-4 B-5 B-5 I-4 H-4 C-4 E-5 D-4 C-4 B-2 C-3 B-3 C-2 B-4 B-3 B-4 A-3	PHOTO COL PC6480 PC6701 PC6702 PC6703 PC6704 PC6705 PC6760 PC6861 PC6871 TRANSISTO G6401 Q6402 Q6403 Q6421 Q6422 Q6423 Q6421 Q6422 Q6423 Q6451 Q6551 Q6551 Q6551 Q6551 Q6552 Q6581	B-4 A-4 A-4 I-4 C-4 I-4 B-4 A-2	Q6601 Q6602 Q6621 Q6621 Q6622 Q6641 Q6642 Q6643 Q6644 Q6645 Q6646 Q6647 Q6662 Q6663 Q6671 Q6672 Q6673 Q6680 Q6681 Q6681 Q6691 Q6742 Q6743 Q6744 Q6762 Q6781 Q6782 Q6791 Q6803 Q6804 Q6821 Q6822 Q6824 Q6824 Q6841 Q6842	C-5 C-4 B-4 G-5 F-5 G-5 G-5 H-5 H-5 D-4 D-4 D-4 D-5 A-4 D-5 A-4 H-5 E-5 A-3 C-3 B-4 C-4 B-3 B-3	TP TP15V TPSC1 TPSOS6 TPSOS7 TPVAD TPVSCN TPVSET TPVSET2 TPVSUS VOLUME VR6600 VR6601 VR6602	I-3 D-5 B-2 B-3 B-2 B-3 C-4 B-3 H-2

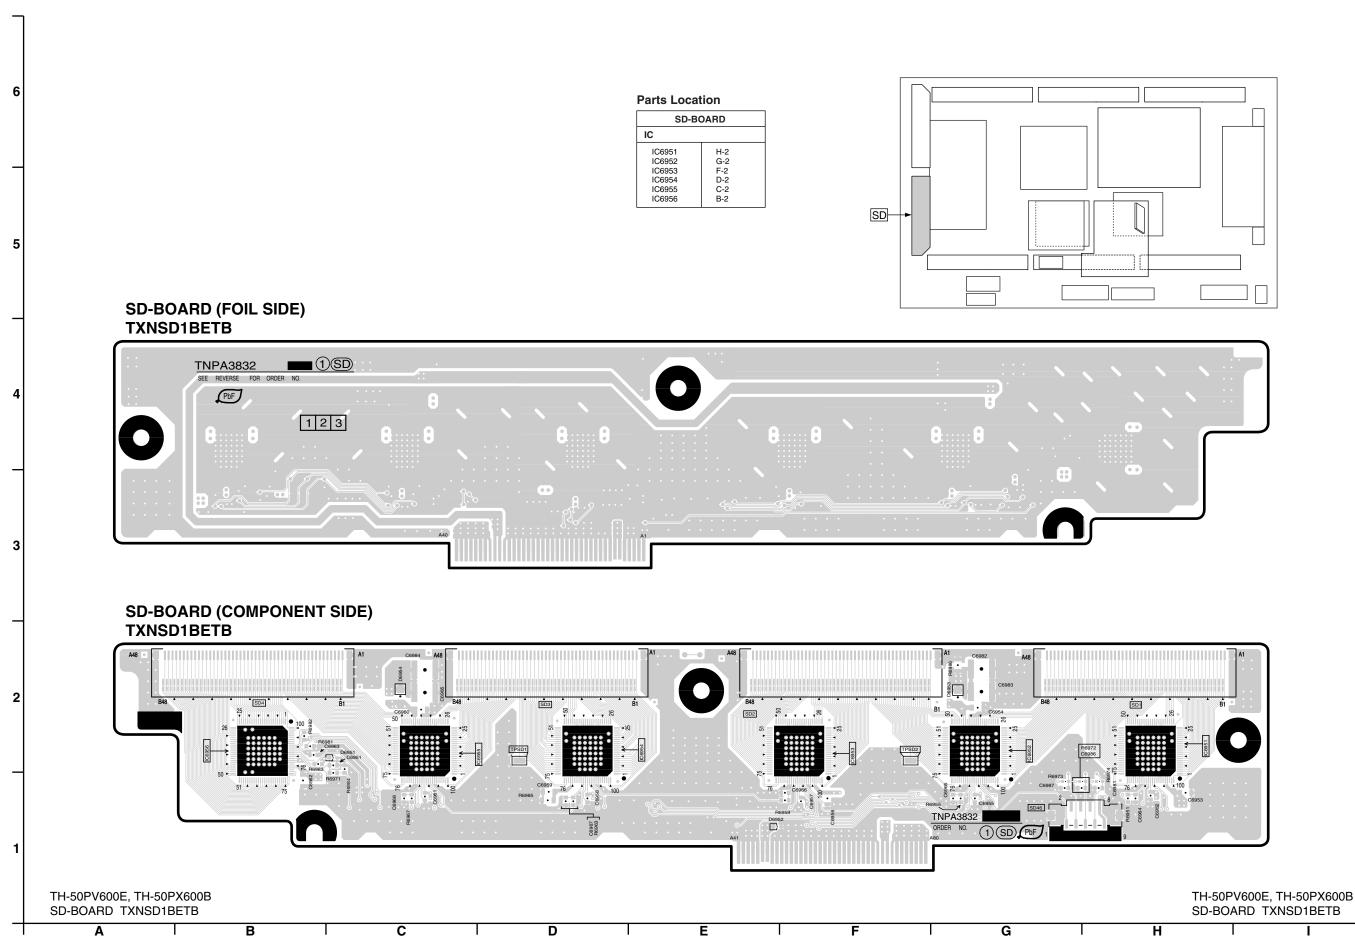

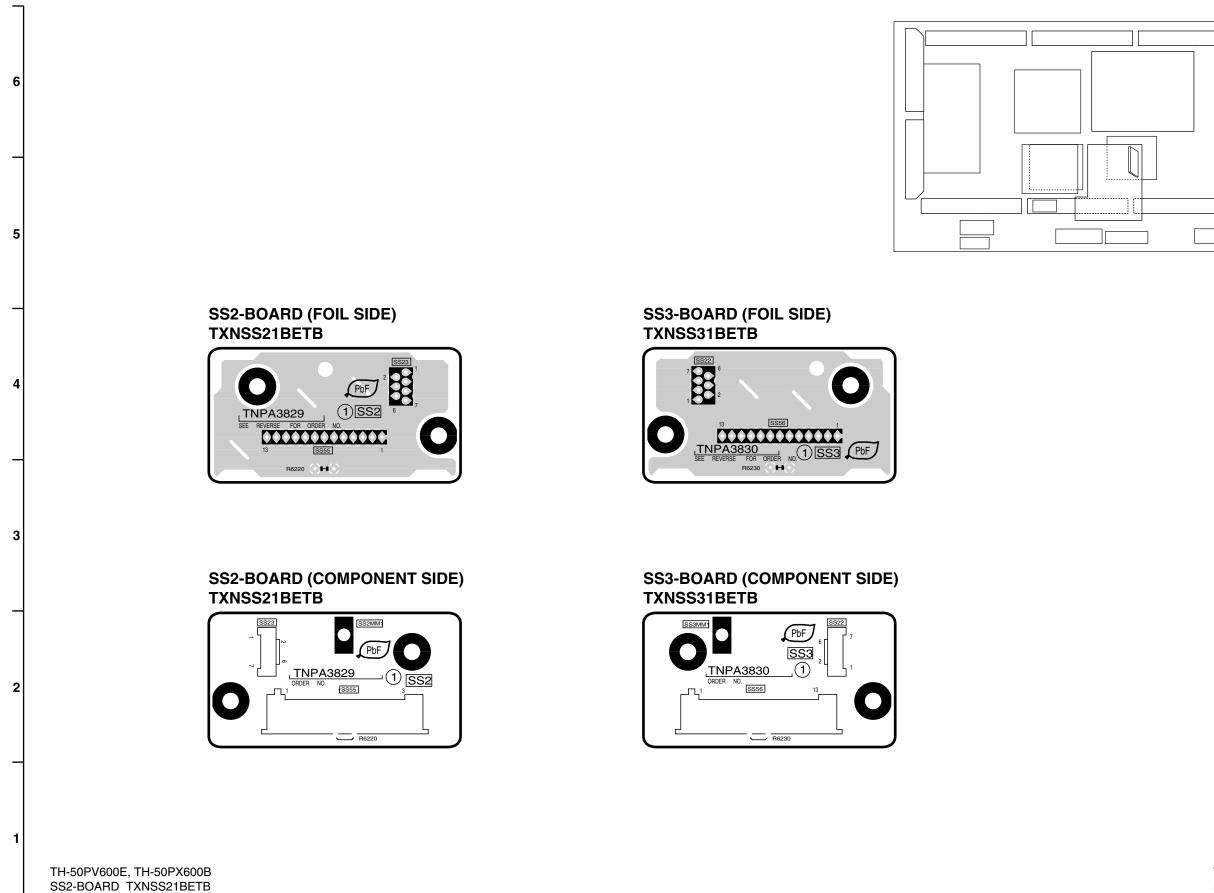

TH-50PV600E, TH-50PX600B SS2-BOARD TXNSS21BETB SS3-BOARD TXNSS31BETB


SS2


SS3


SS3-BOARD TXNSS31BETB

D


G

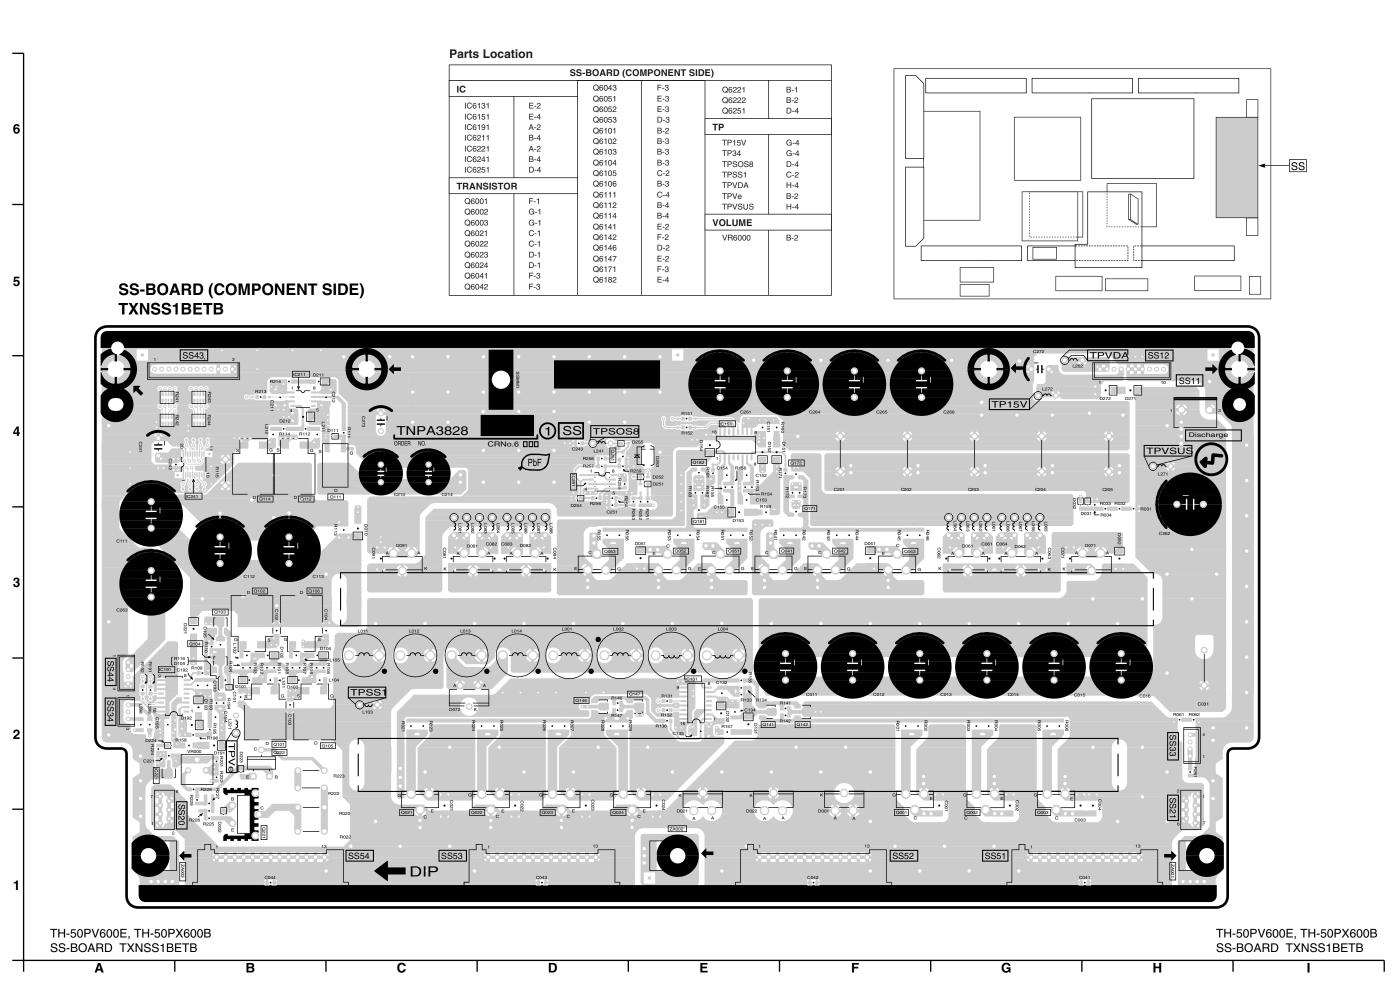


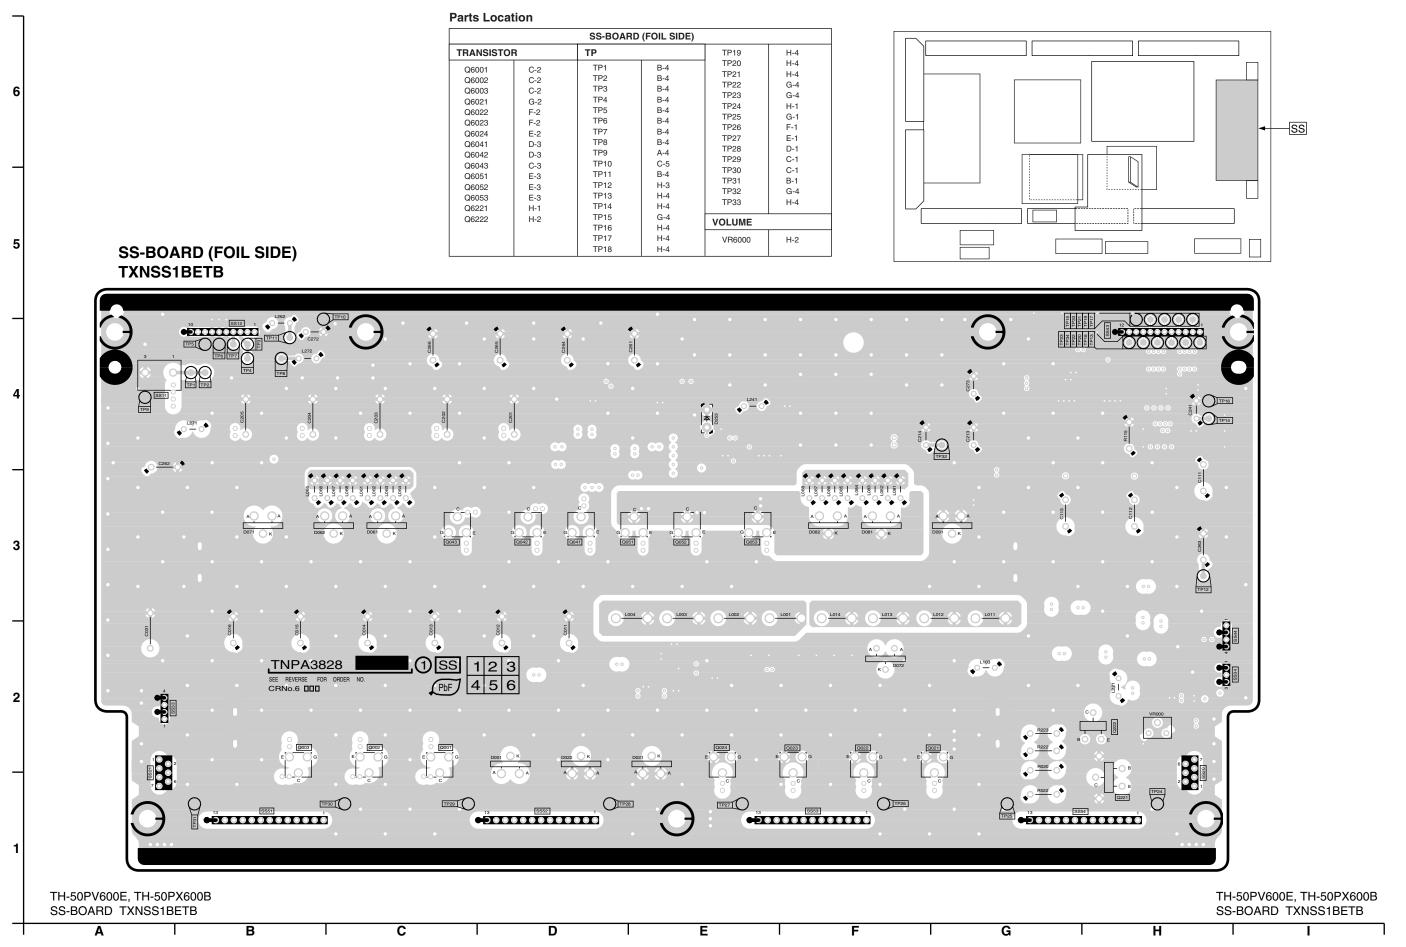

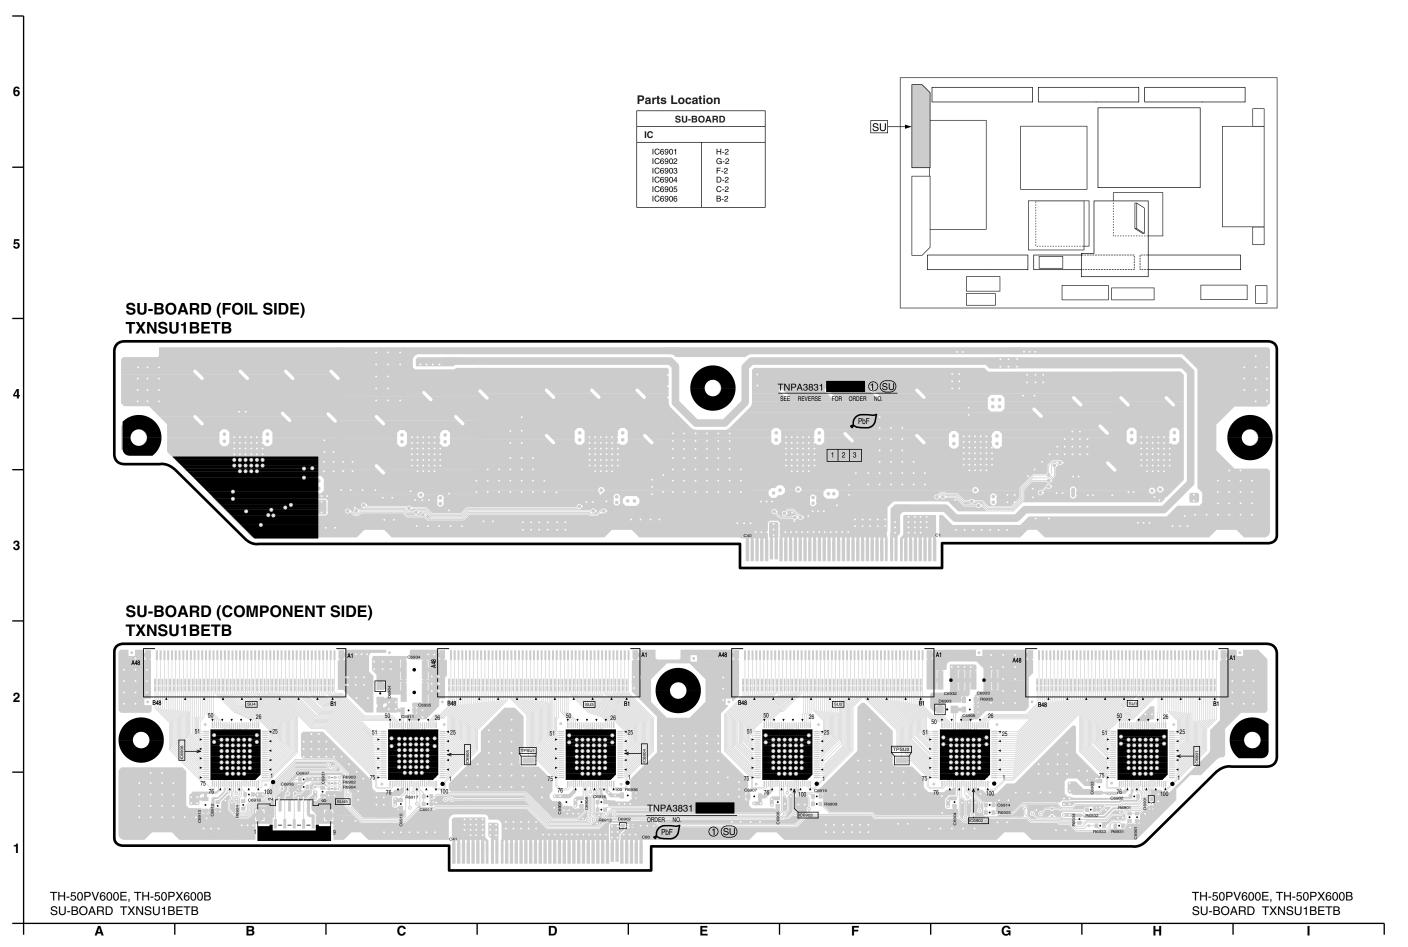

XV-BOARD (COMPONENT SIDE) TNPA3740AC

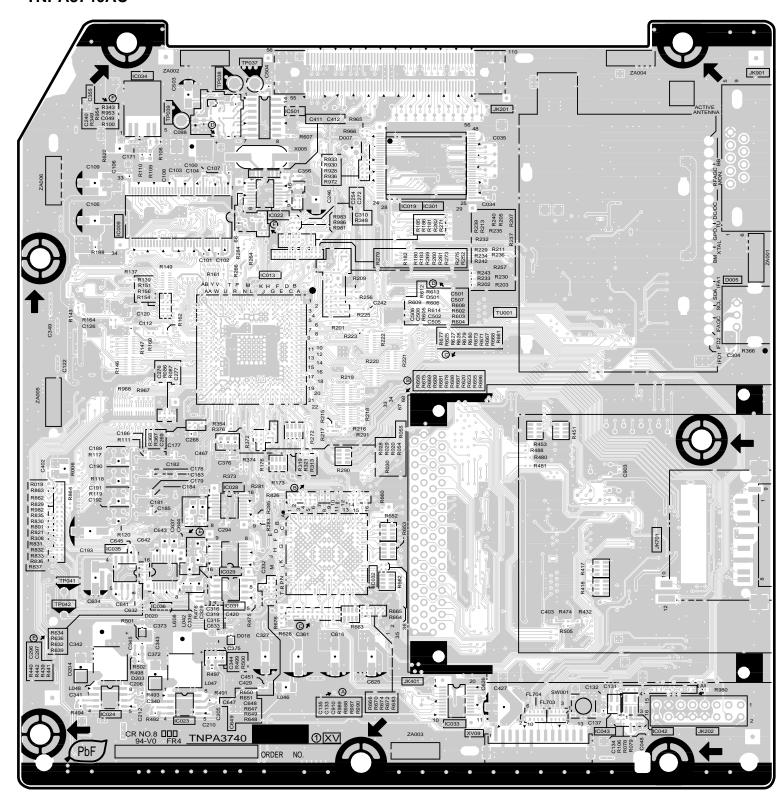

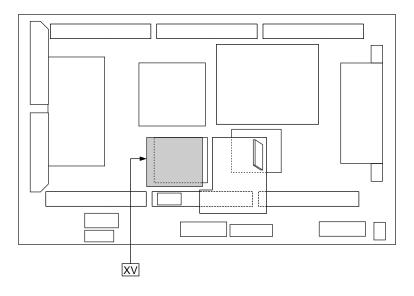

Parts Location

XV-BOARD (COMPONENT SIDE)				
IC		TP		
IC8009	B-5	TP8037	B-6	
IC8013	C-4	TP8038	B-6	
IC8019	D-5	TP8039	B-5	
IC8022	C-5	TP8041	A-2	
IC8023	B-1	TP8042	A-2	
IC8024	B-1			
IC8028	B-3			
IC8029	B-2			
IC8031	B-2			
IC8032	C-2			
IC8033	D-1			
IC8034	B-6			
IC8035	B-3			
IC8036	B-2			
IC8042	E-1			
IC8043	E-1			
IC8301	D-5			
IC8501	C-5			

TH-50PX600B XV-BOARD TNPA3740AC TH-50PX600B XV-BOARD TNPA3740AC

A

С

D


Е


•

G

H XV-BOARD



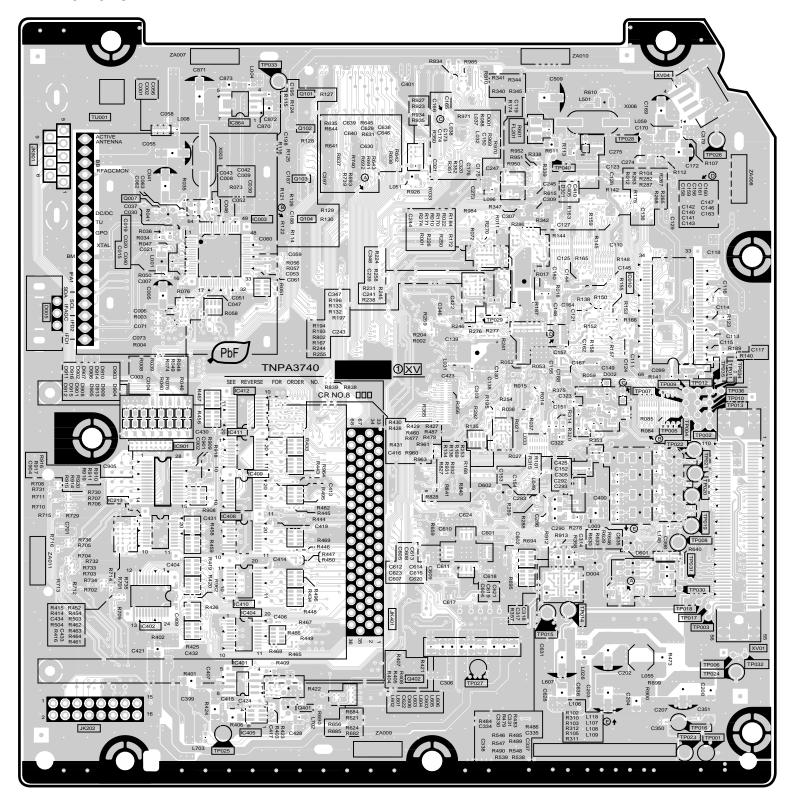


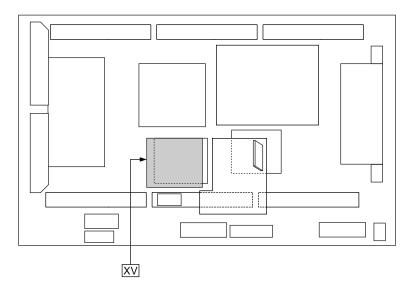


XV-BOARD (FOIL SIDE)				
IC8003 IC8010 IC8213 IC8401 IC8402 IC8404	C-5 E-4 B-3 B-2 B-2 B-2	TP8006 TP8007 TP8008 E-4 TP8009 B-3 TP8010 B-2 TP8011 B-2 TP8012 B-2 TP8013	F-2 E-4 E-3 E-4 F-4 E-4 F-3	
IC8405 IC8408 IC8409 IC8410 IC8411 IC8411 IC8501 IC8501 IC8864 IC8901	B-1 B-3 C-3 B-2 B-3 B-4 C-5 B-5 B-5	TP8014 TP8015 TP8016 TP8017 TP8018 TP8019 TP8020 TP8021 TP8022 TP8023	E-2 D-2 E-1 E-2 E-2 E-3 E-3 E-3 E-3 E-1	
TRANSISTOR		TP8024 TP8025	F-2 B-1	
Q8007 Q8101 Q8102 Q8103 Q8104 Q8401 Q8402	B-5 C-6 C-5 C-5 C-5 C-1 D-2	TP8026 TP8027 TP8028 TP8029 TP8030 TP8031 TP8032 TP8033	F-5 D-2 E-5 D-4 E-2 E-2 F-2 C-6	
TP8001 TP8002 TP8003 TP8004 TP8005	F-1 E-3 E-2 E-3 E-3	TP8034 TP8035 TP8036 TP8040	F-4 F-4 F-4 E-4	


TH-50PX600B XV-BOARD TNPA3740AC TH-50PX600B XV-BOARD TNPA3740AC

A B C D E F G H

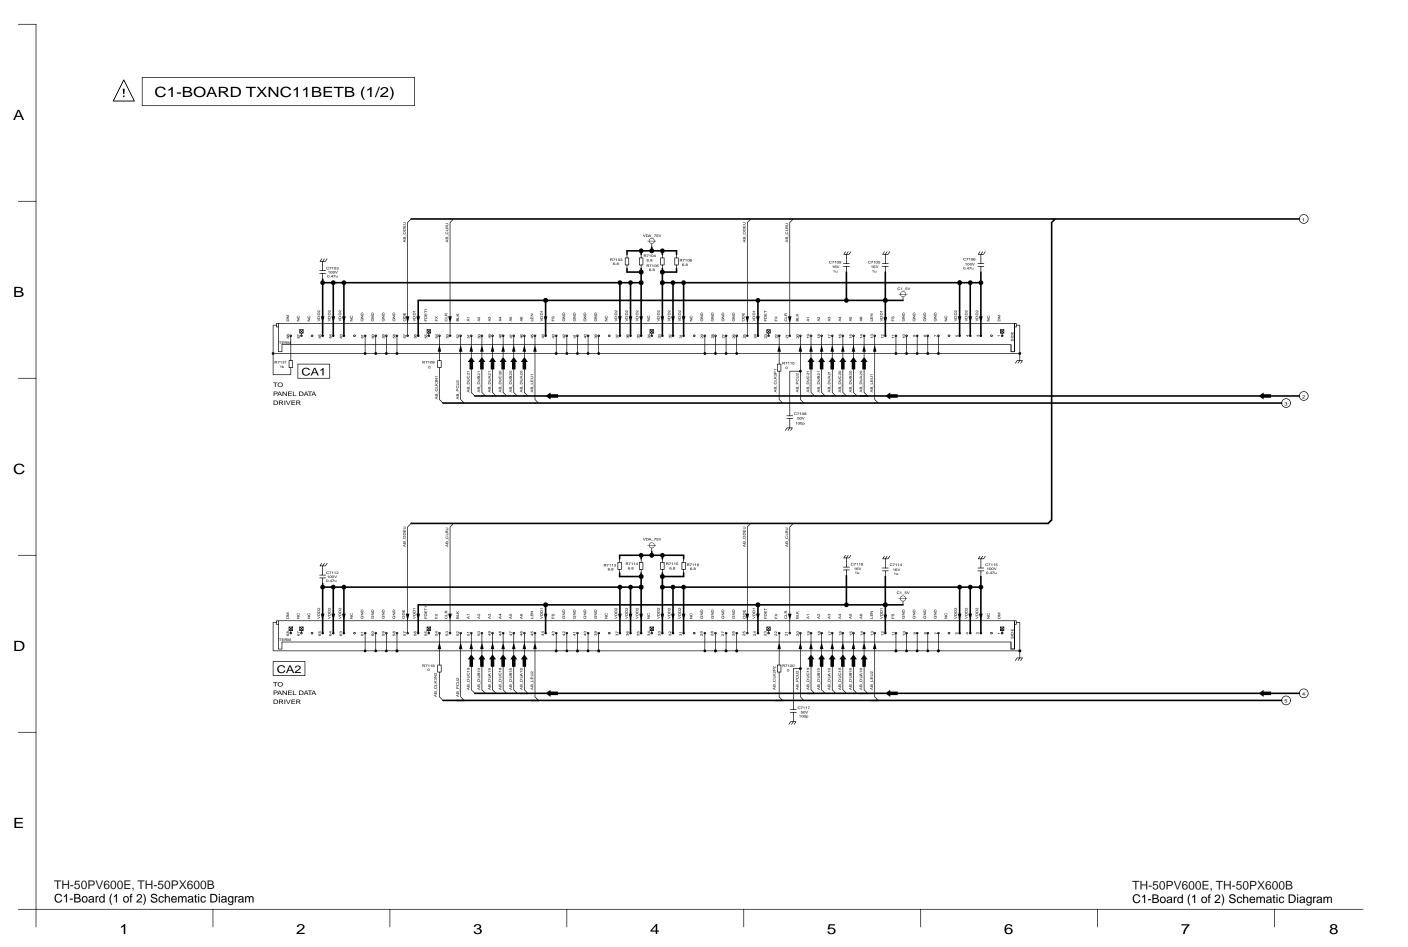


C1-BOARD TXNC11BETB (2/2)

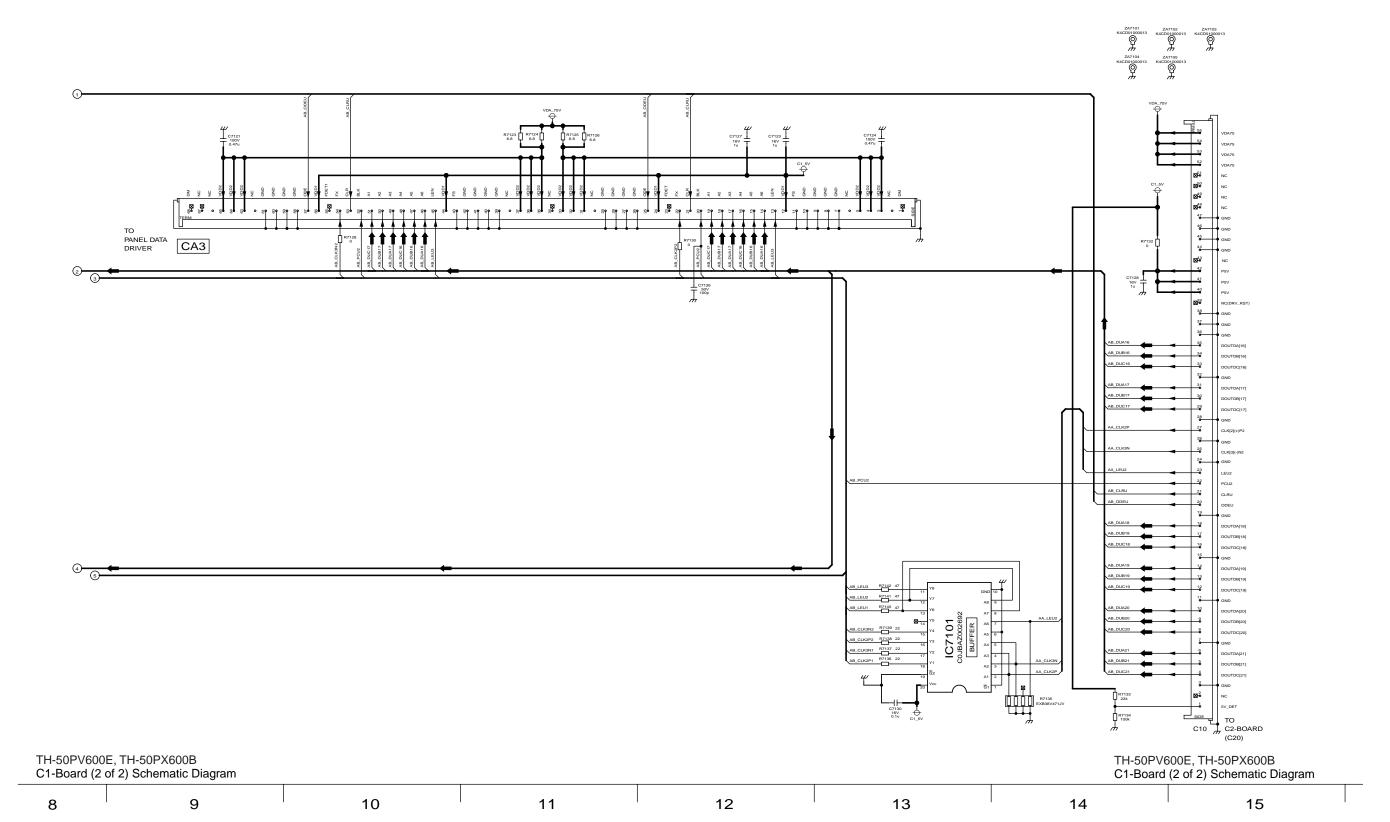

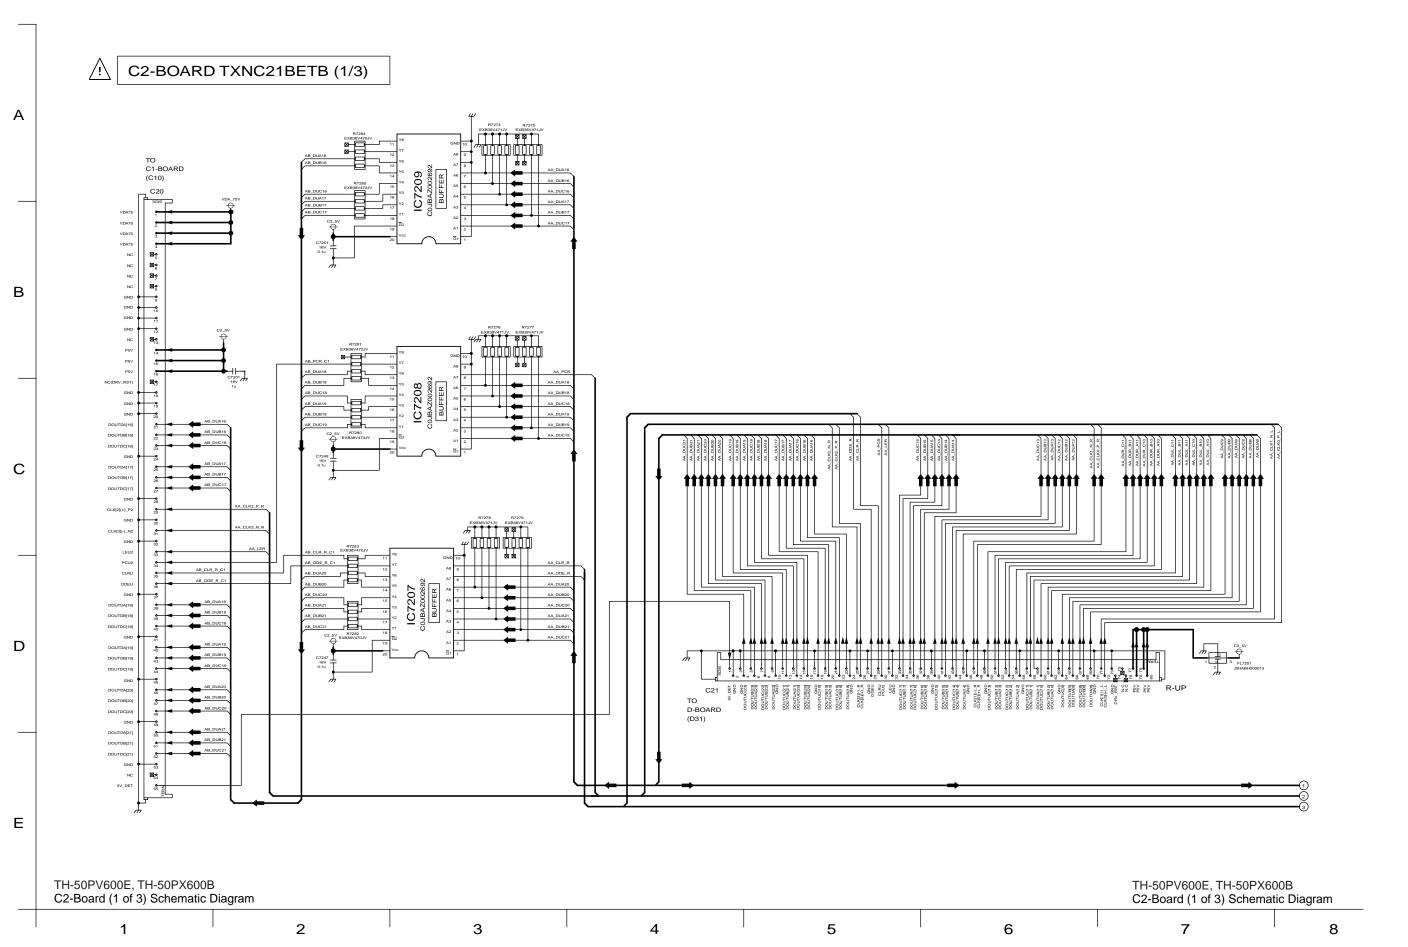





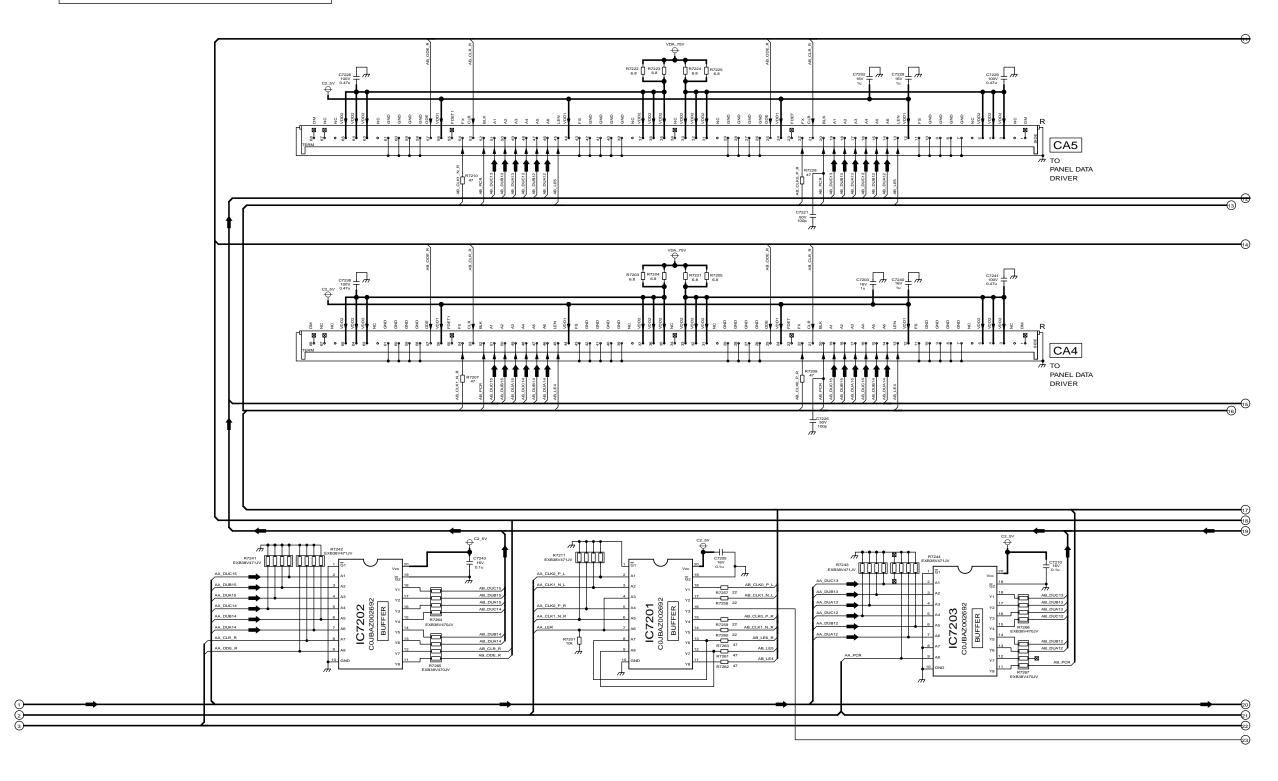



TH-50PV600E, TH-50PX600B C2-Board (2 of 3) Schematic Diagram


8 9 10 11 12 13 14 15



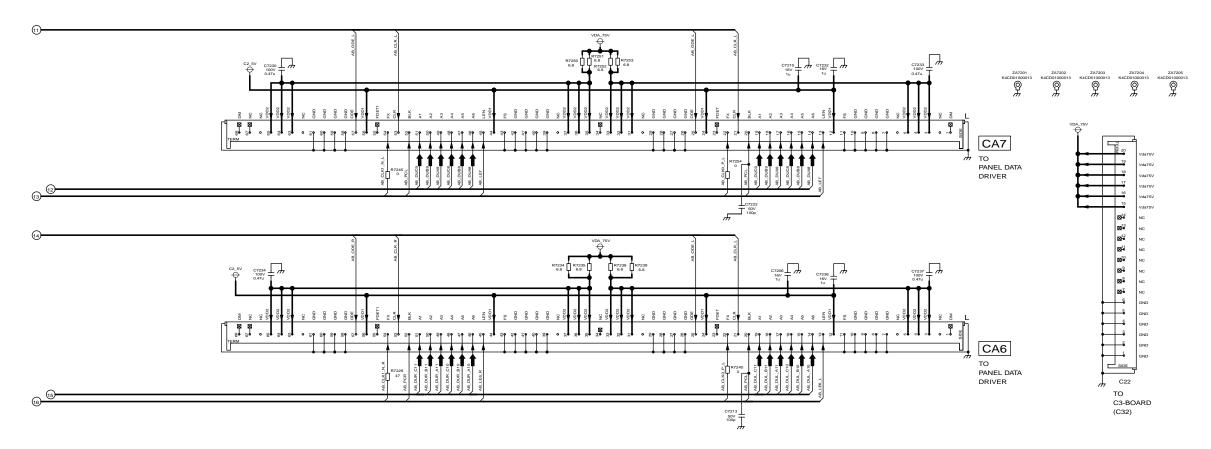

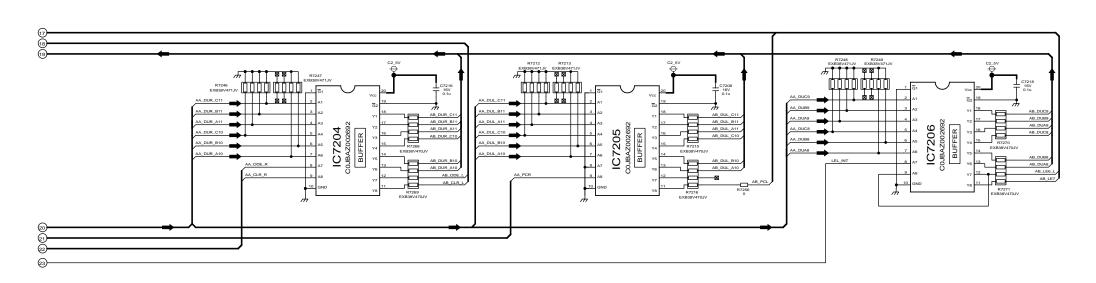


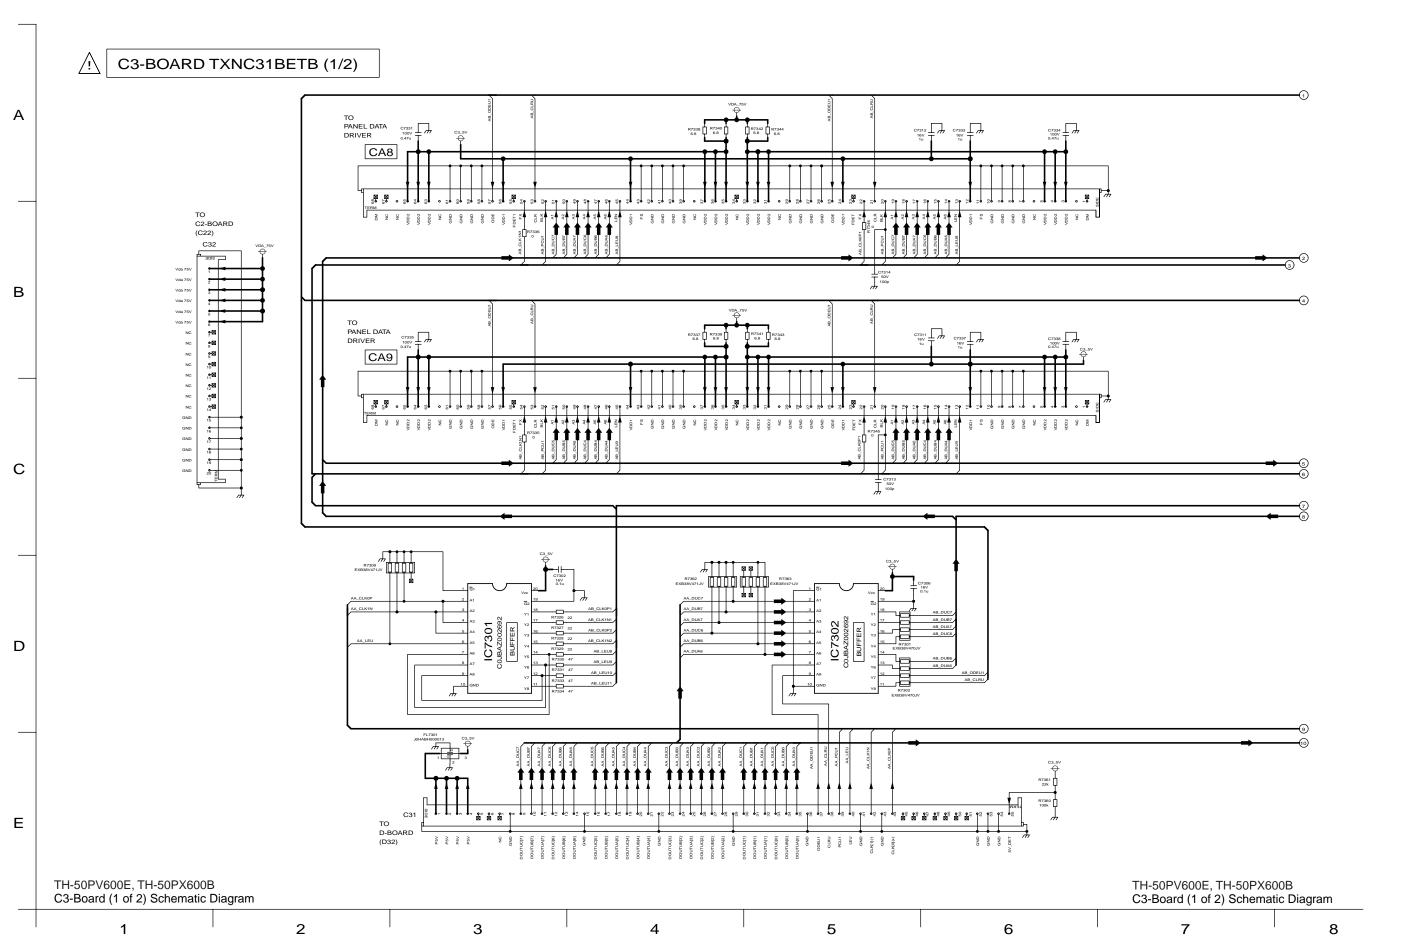


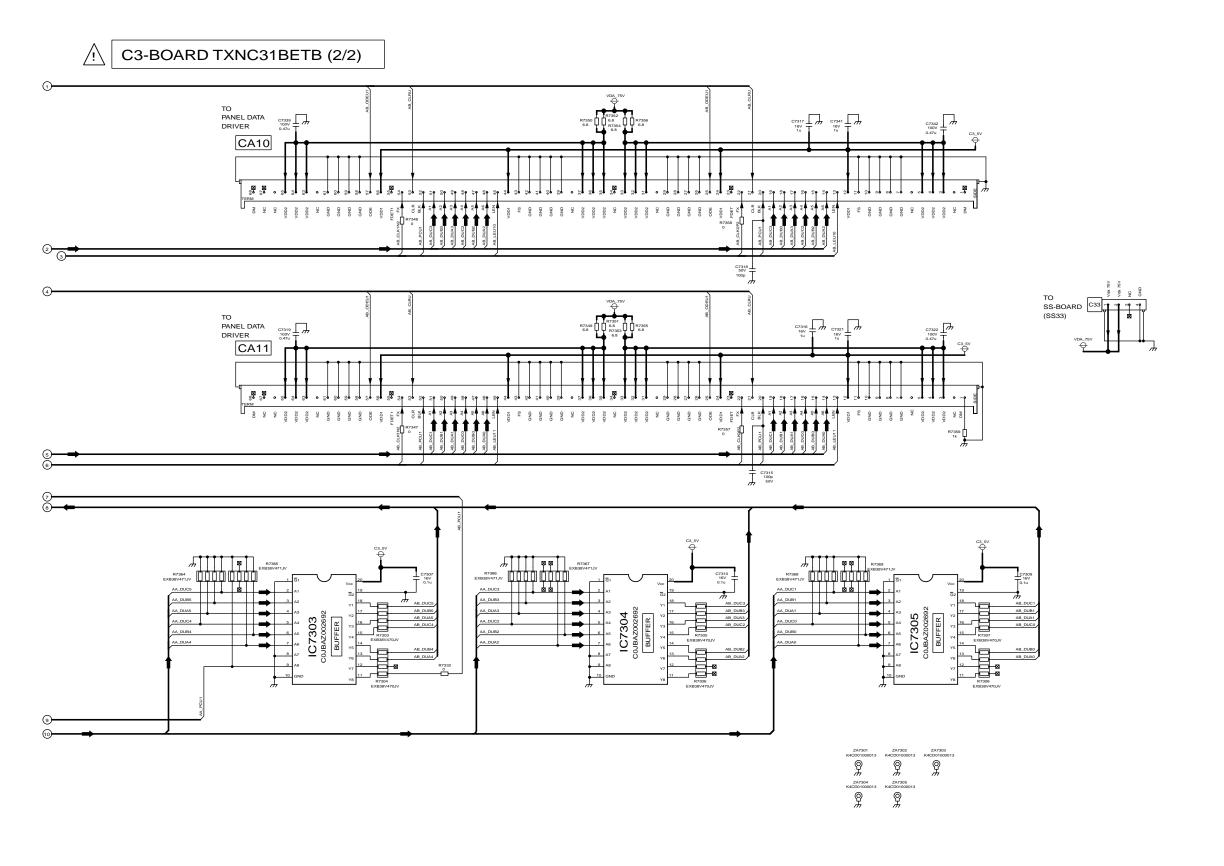


TH-50PV600E, TH-50PX600B C3-Board (2 of 2) Schematic Diagram


8 9 10 11 12 13 14 15

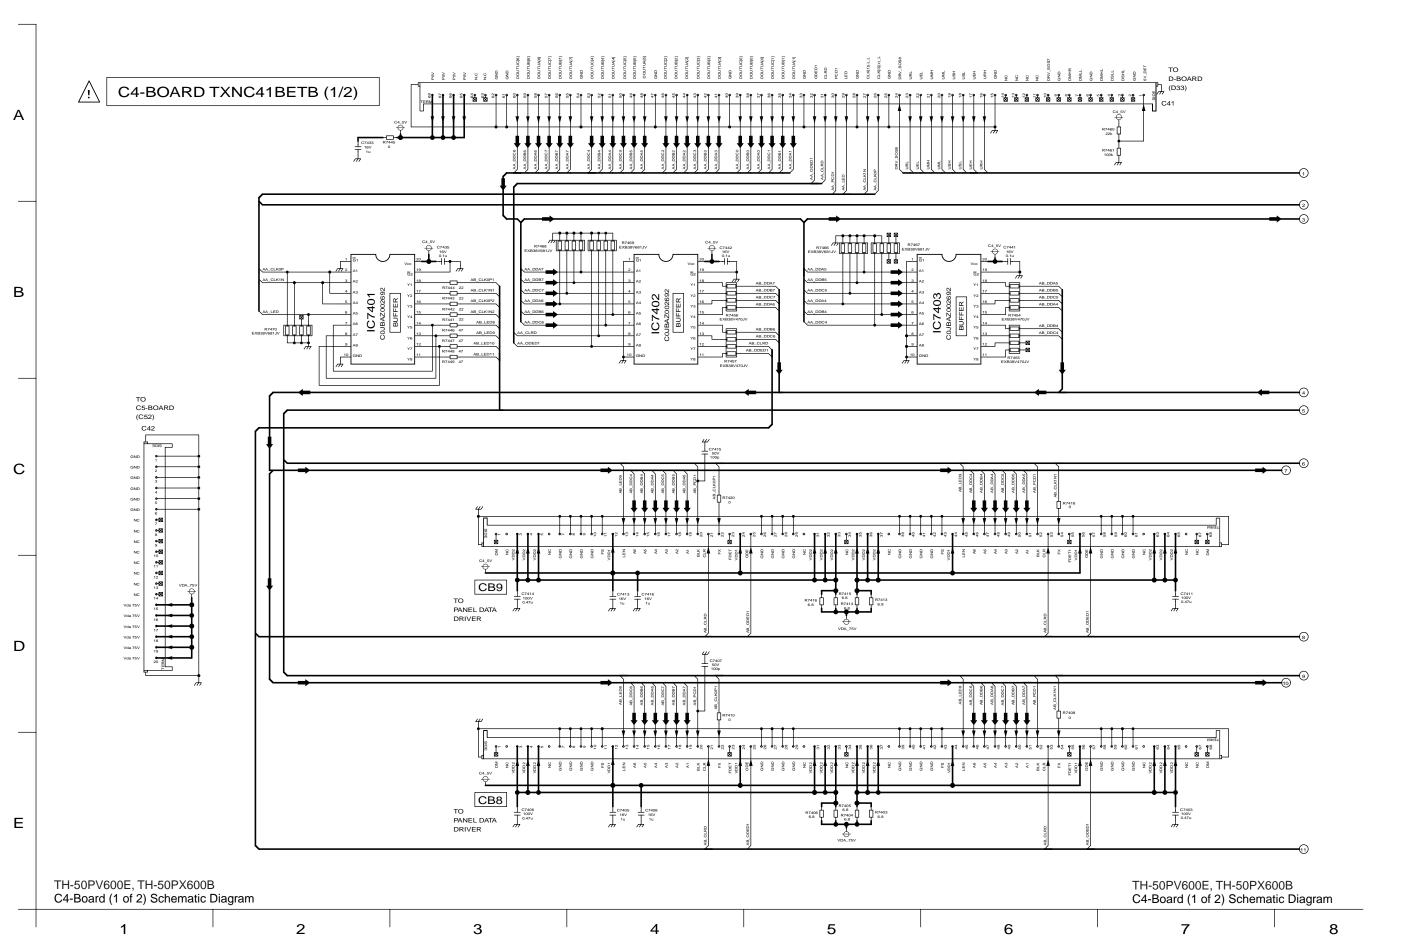


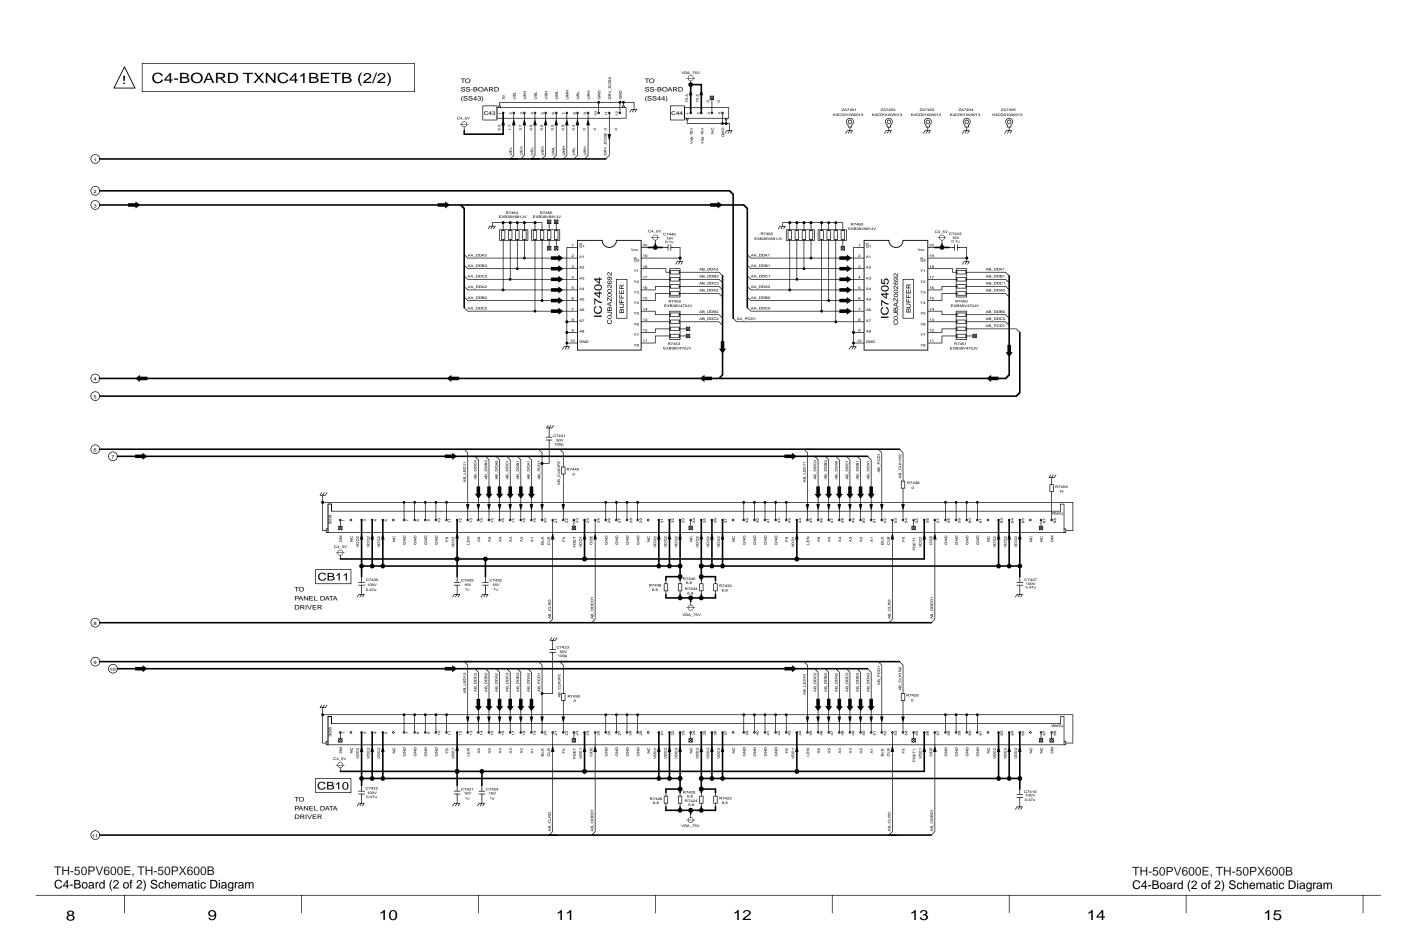

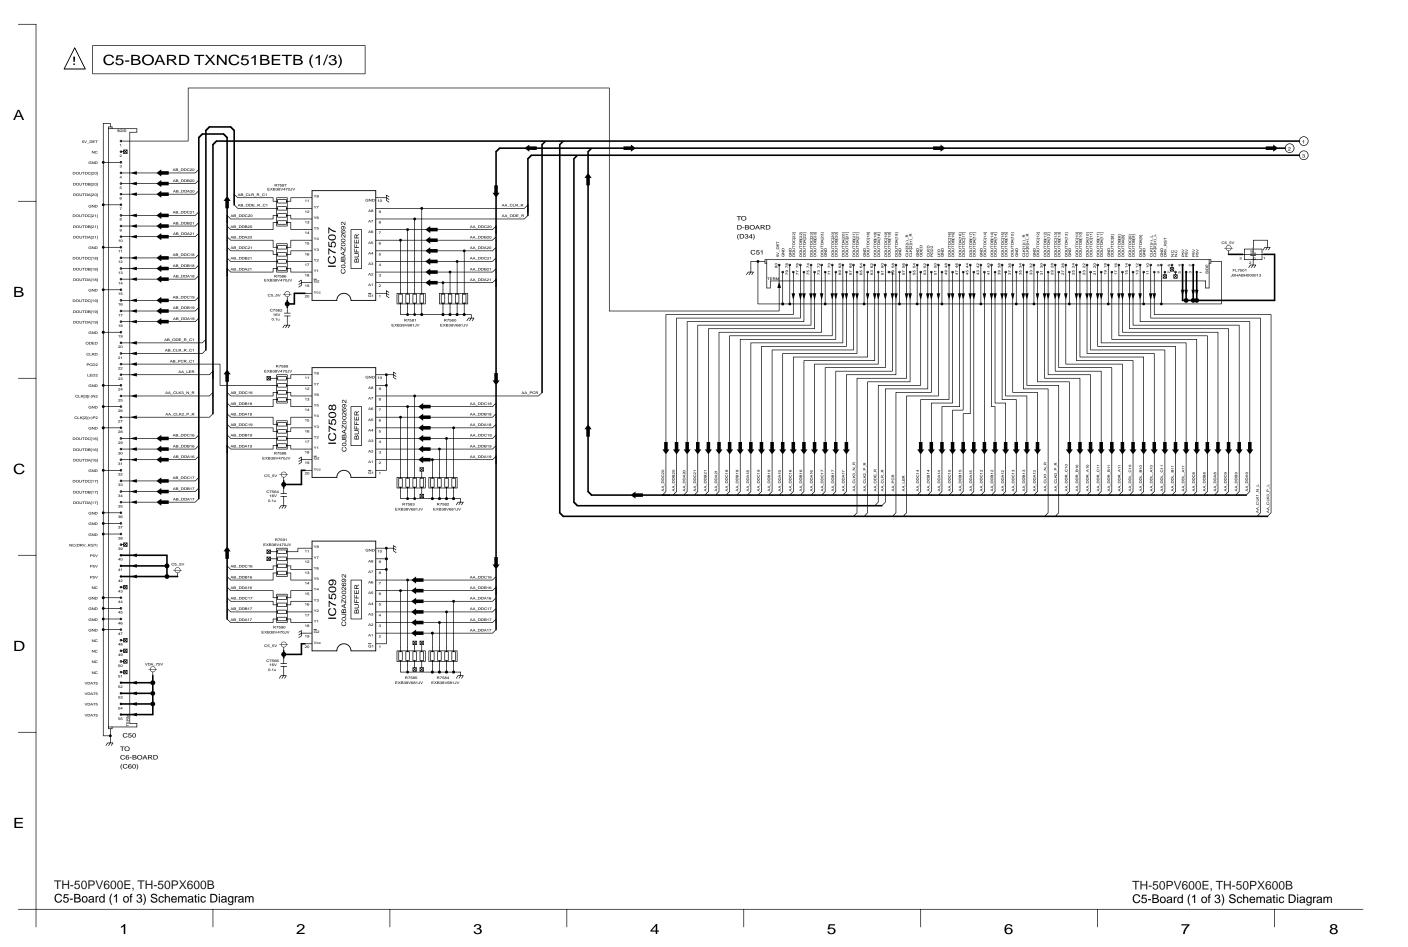


C5-BOARD TXNC51BETB (2/3)

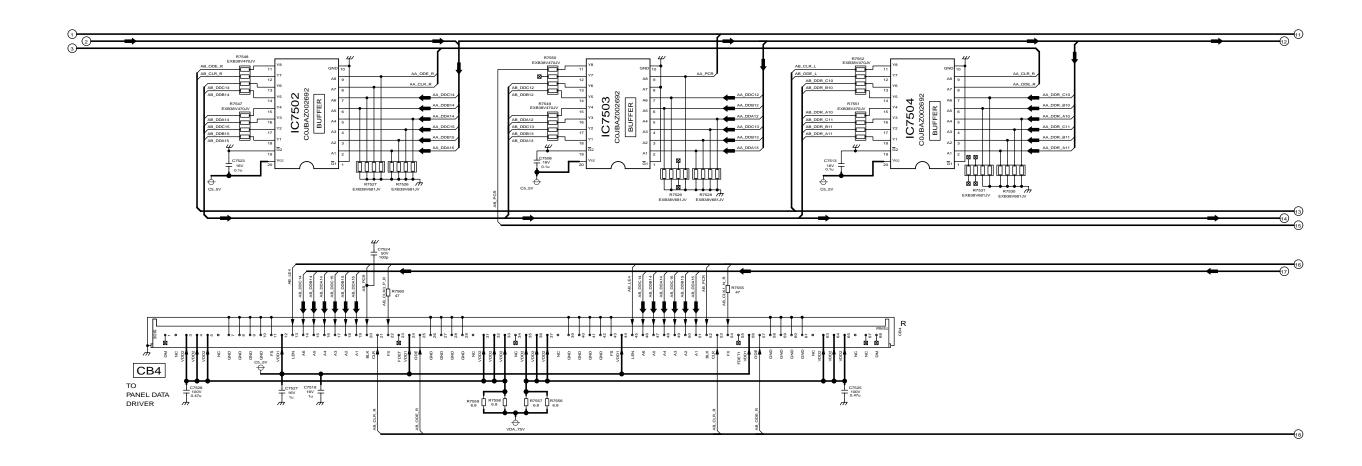


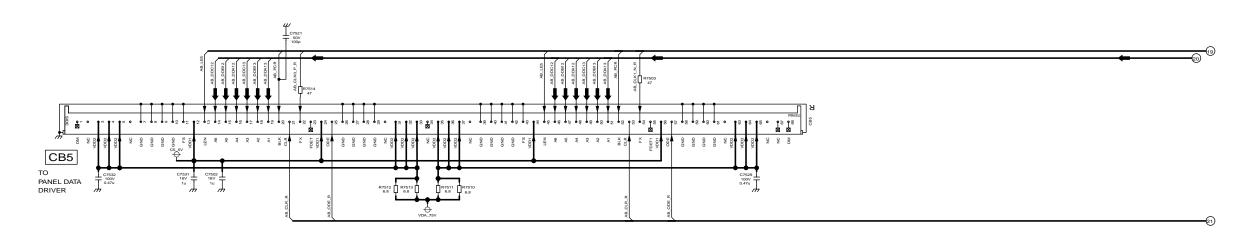


C5-BOARD TXNC51BETB (3/3)

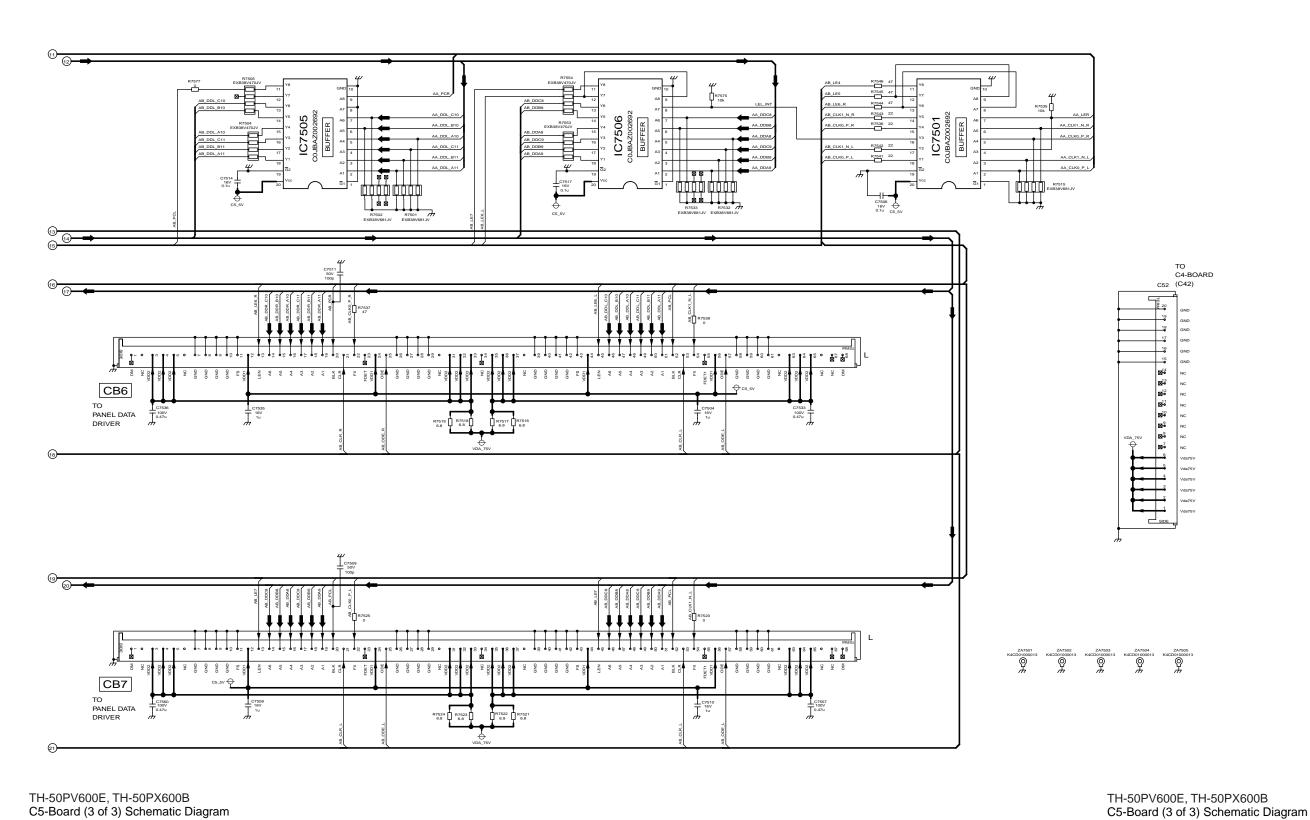


16 17 18 19 20 21 22 23

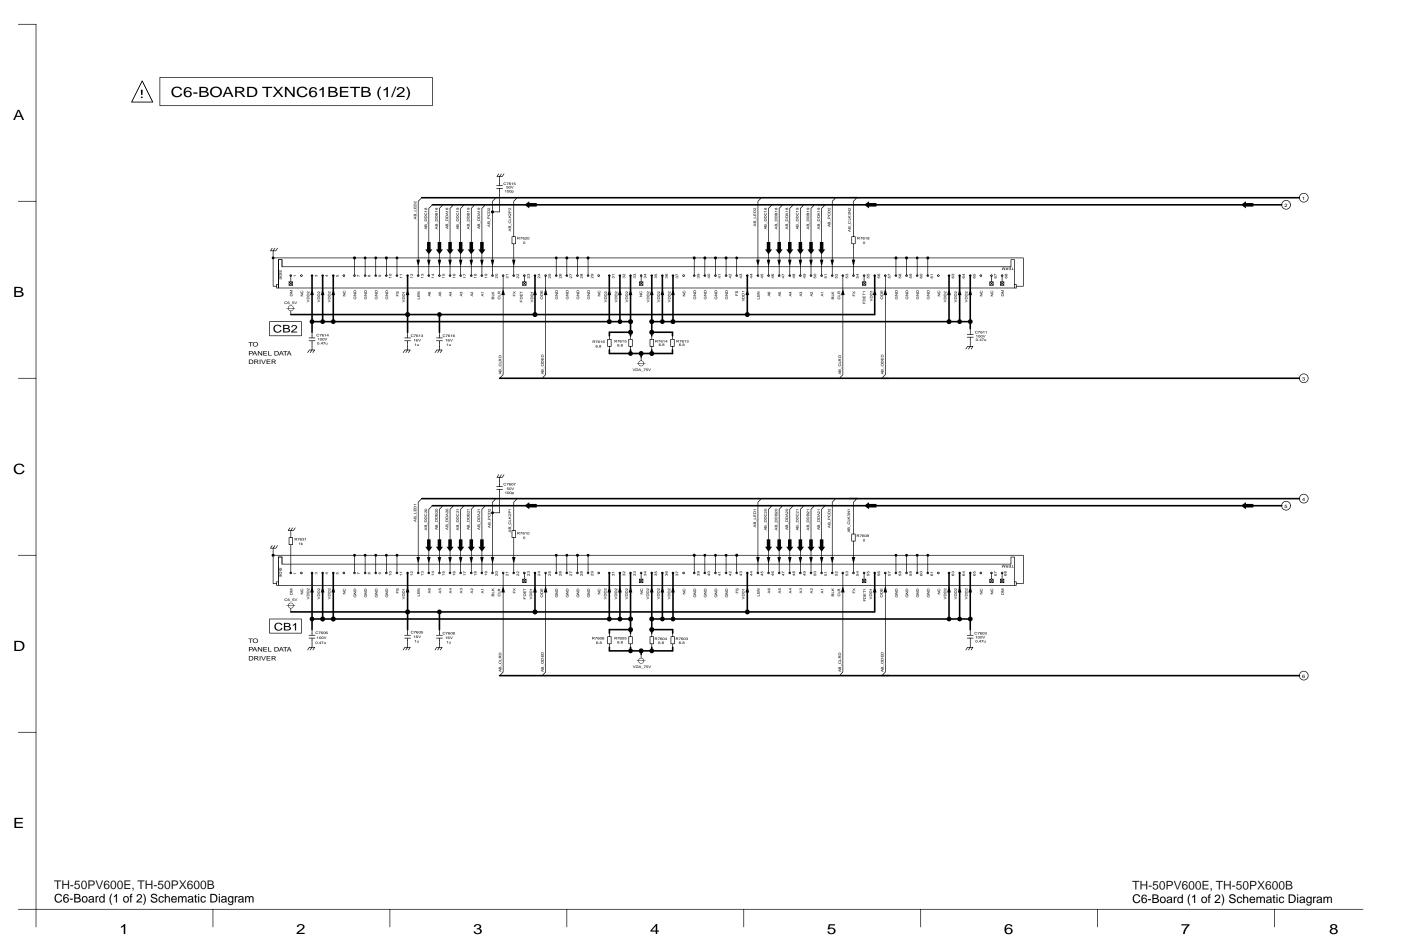


C6-BOARD TXNC61BETB (2/2)

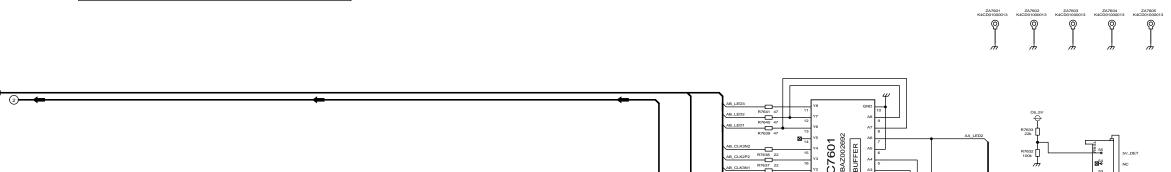


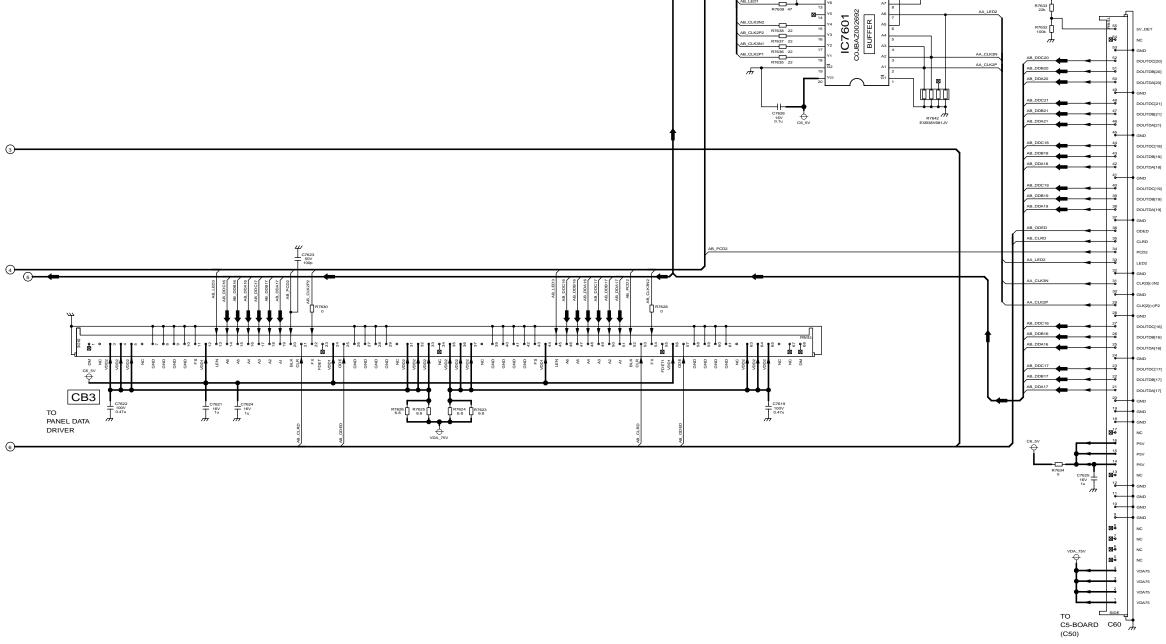

TH-50PV600E, TH-50PX600B
C6-Board (2 of 2) Schematic Diagram


8 9 10 11 12 13 14 15

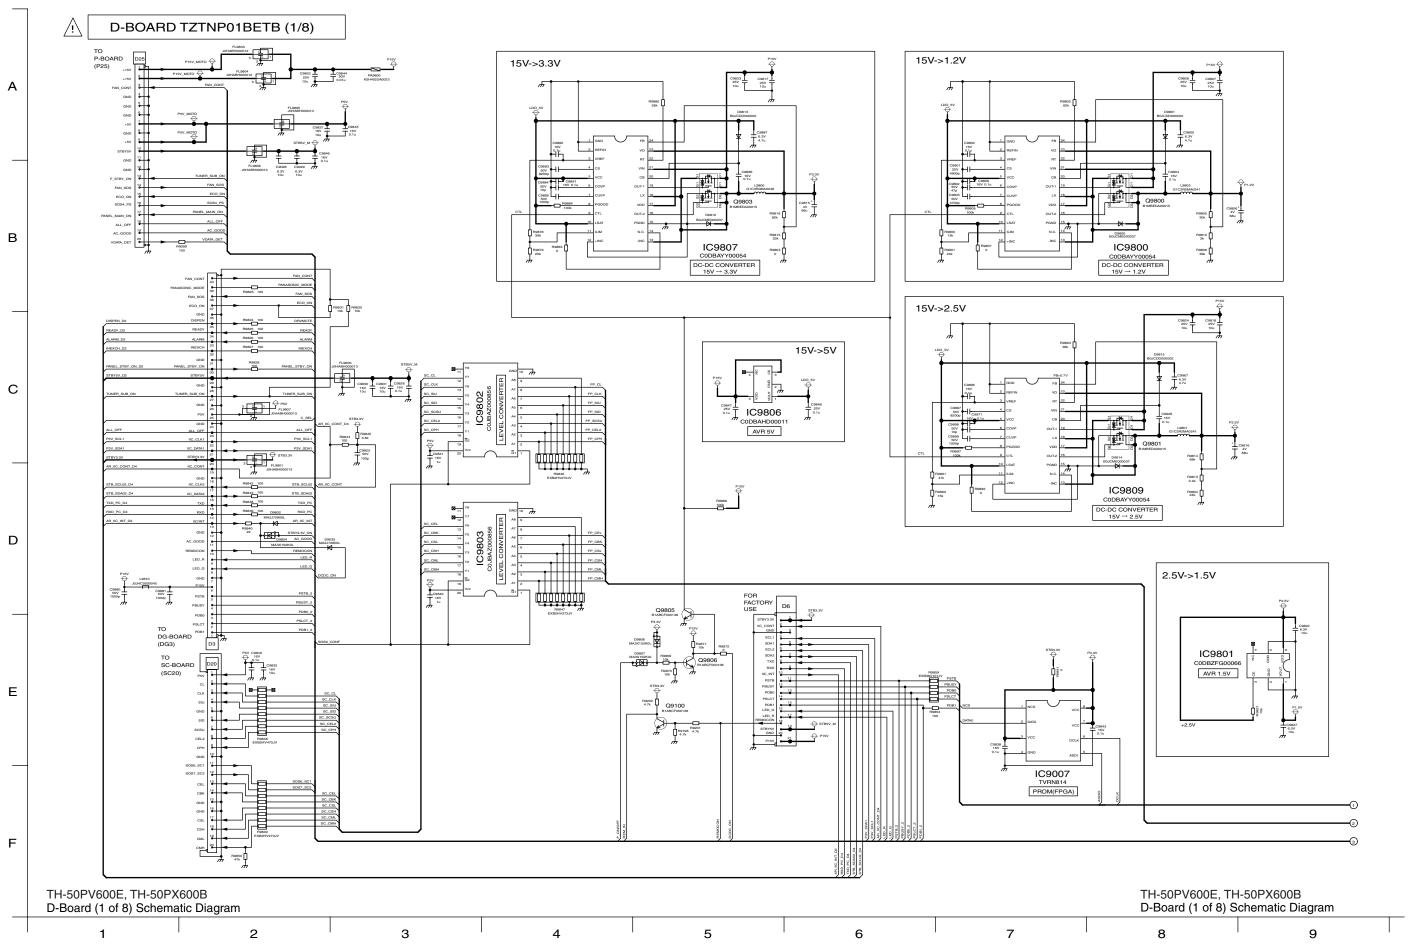


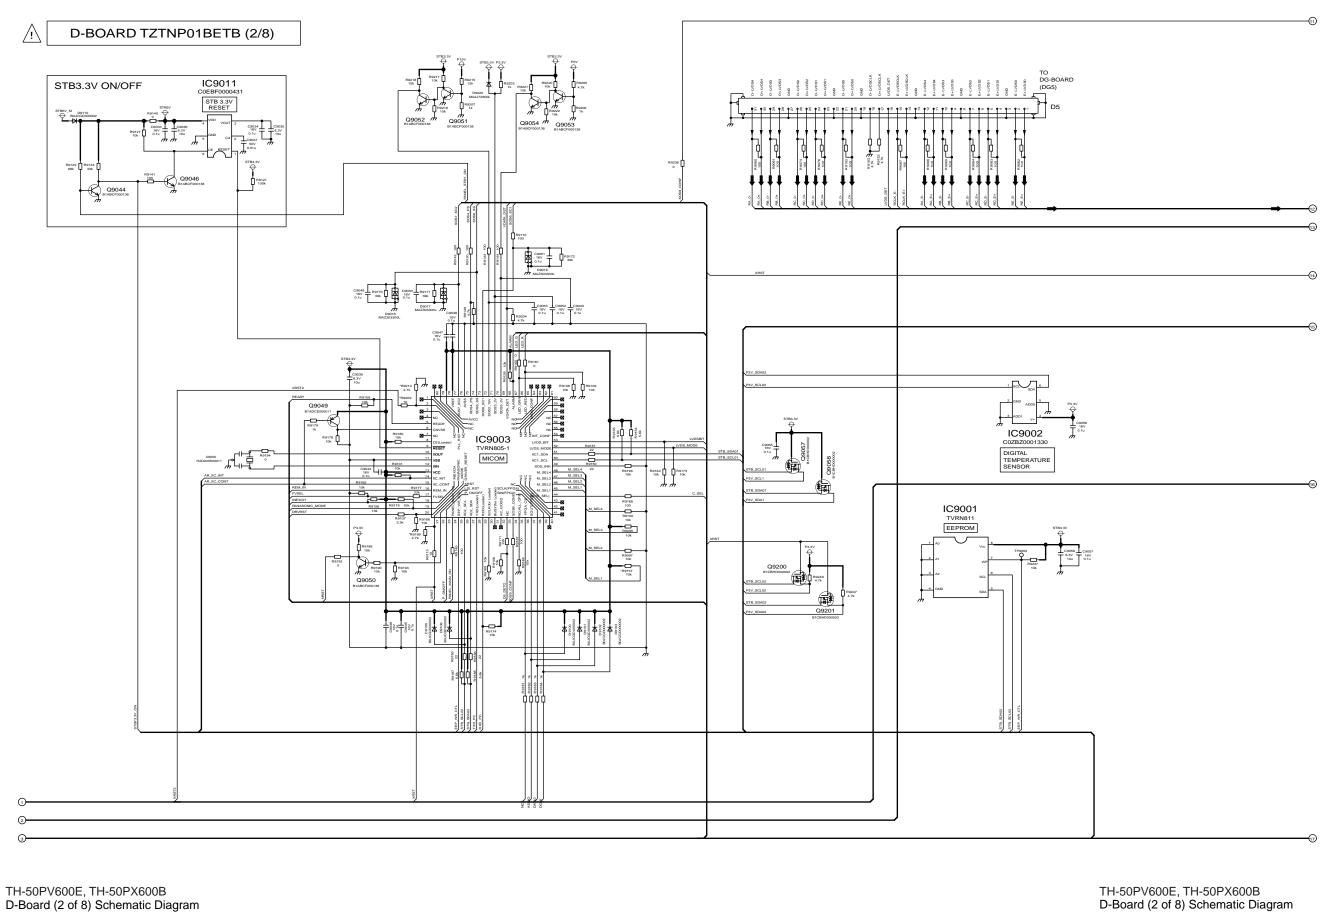



D-Board (2 of 8) Schematic Diagram


10 11 12 13 14 15 16 17 18

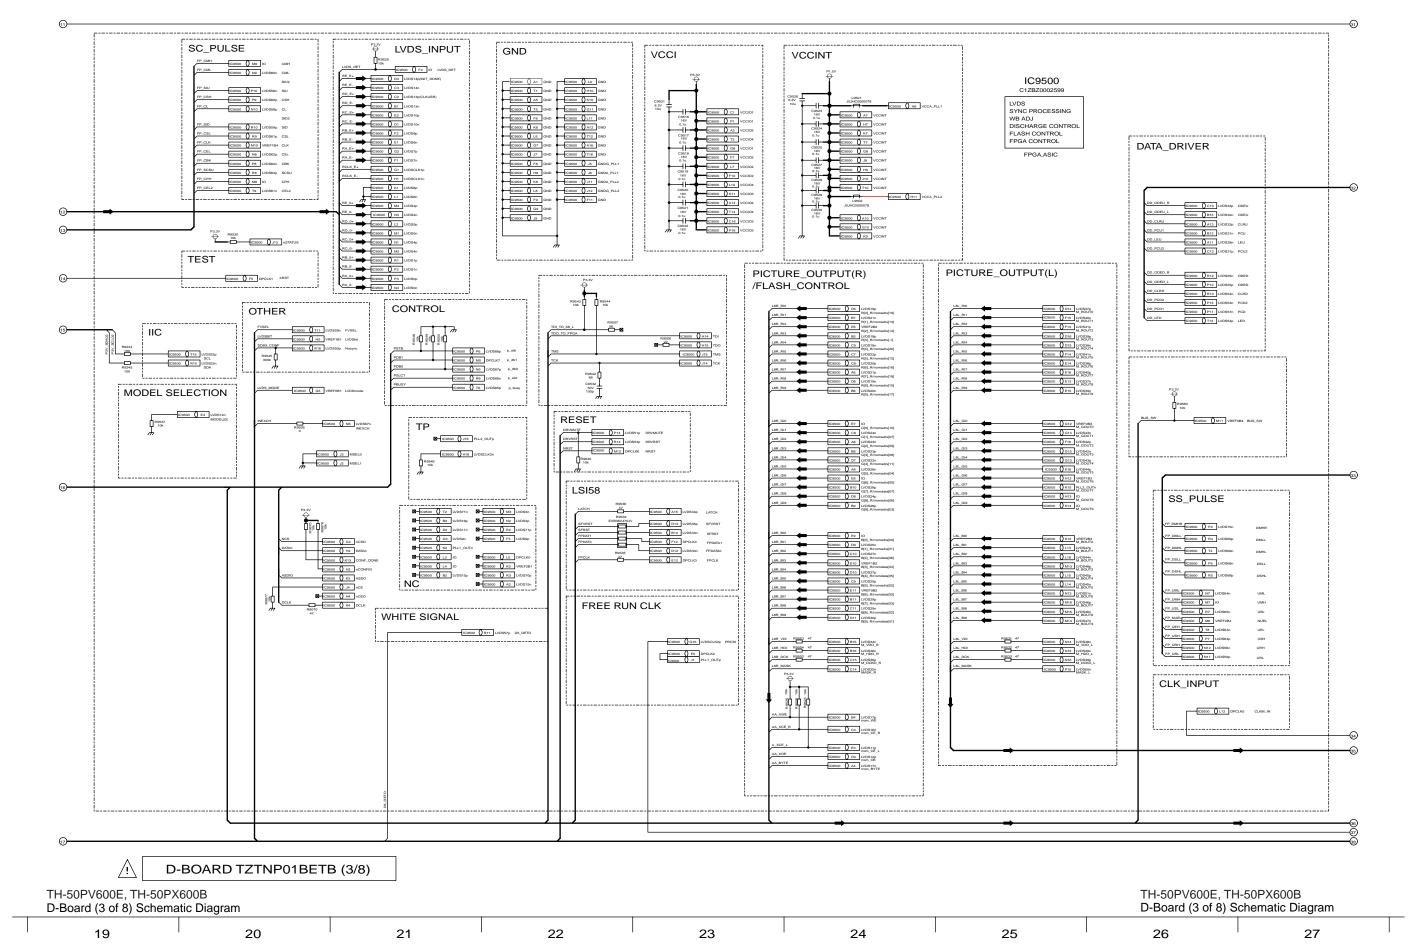


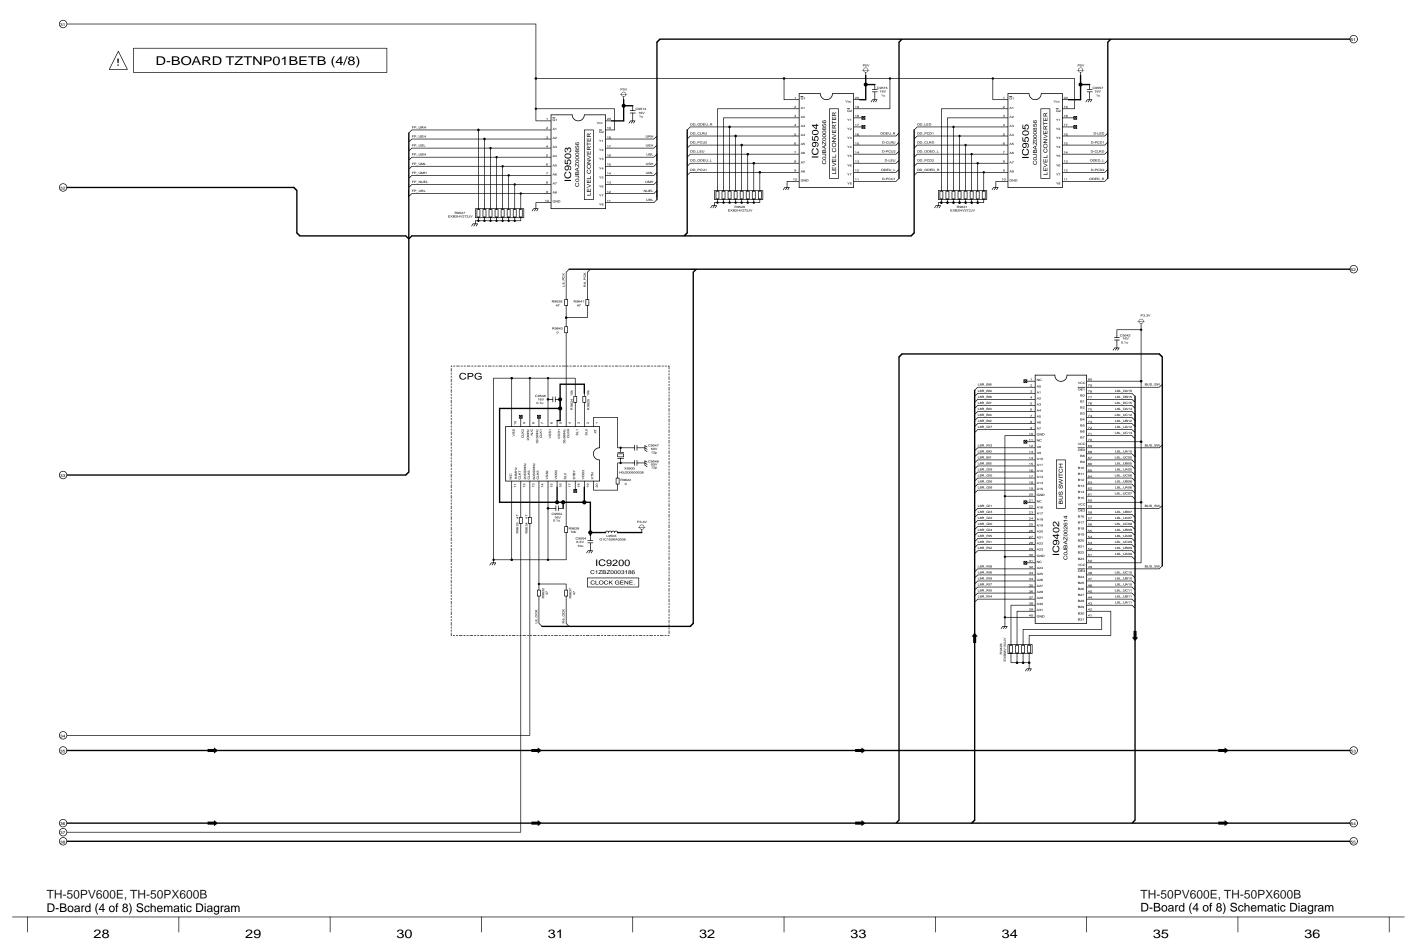

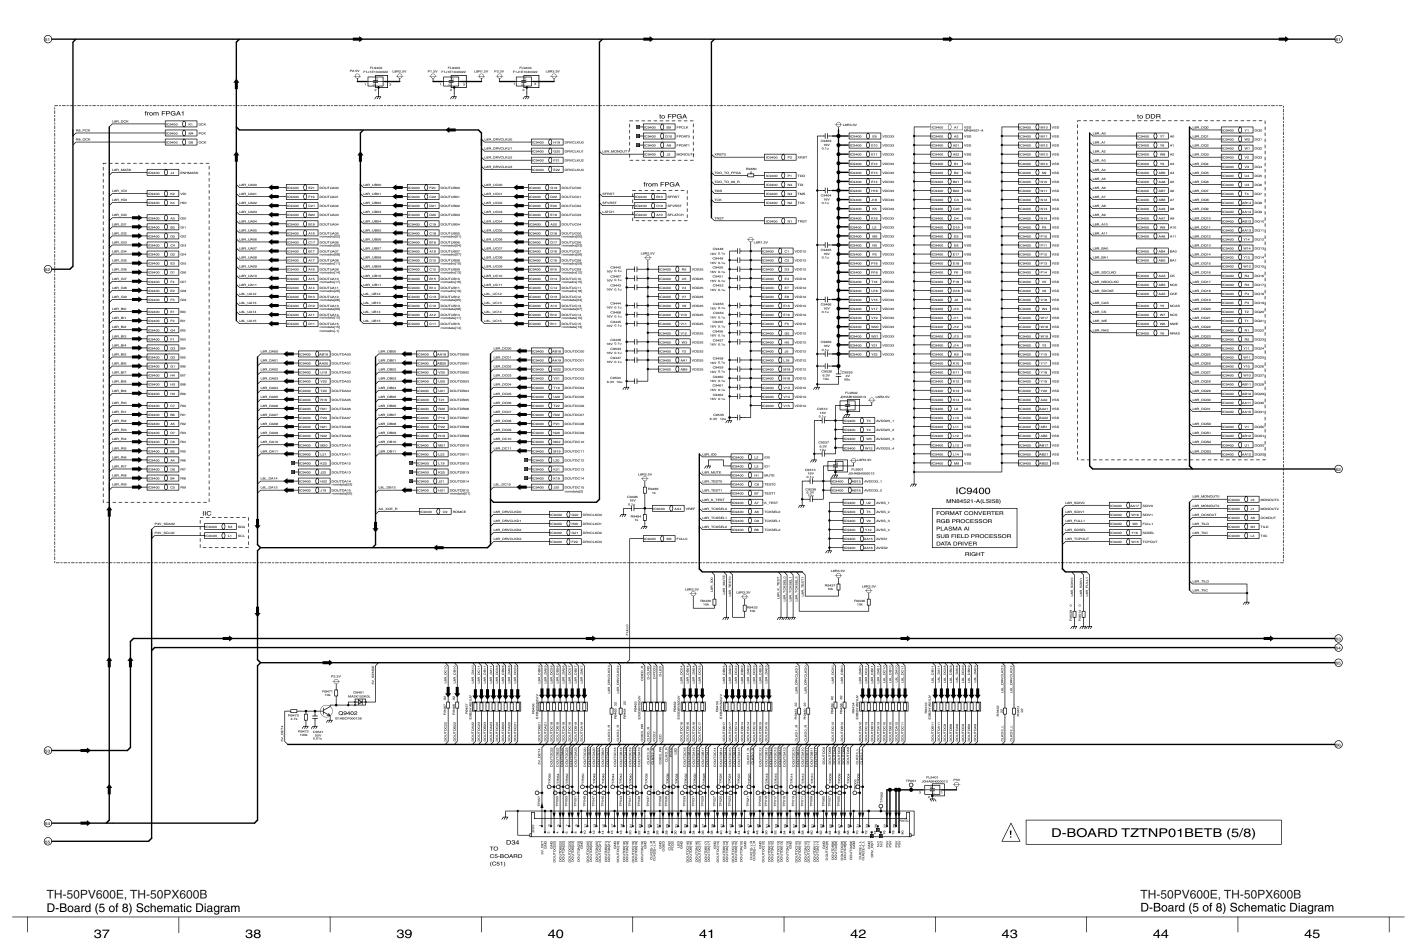

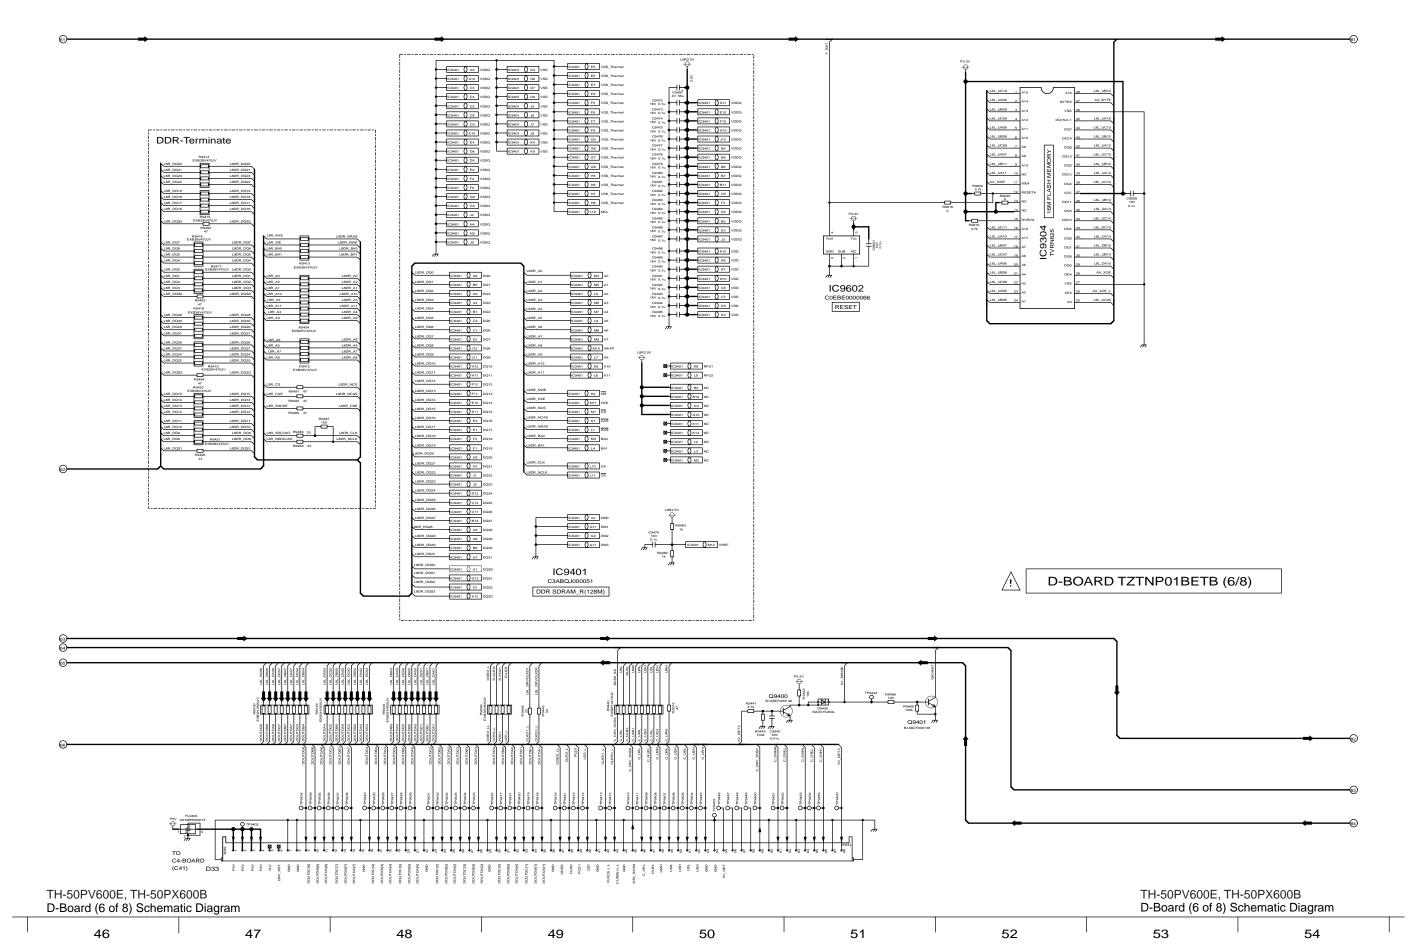


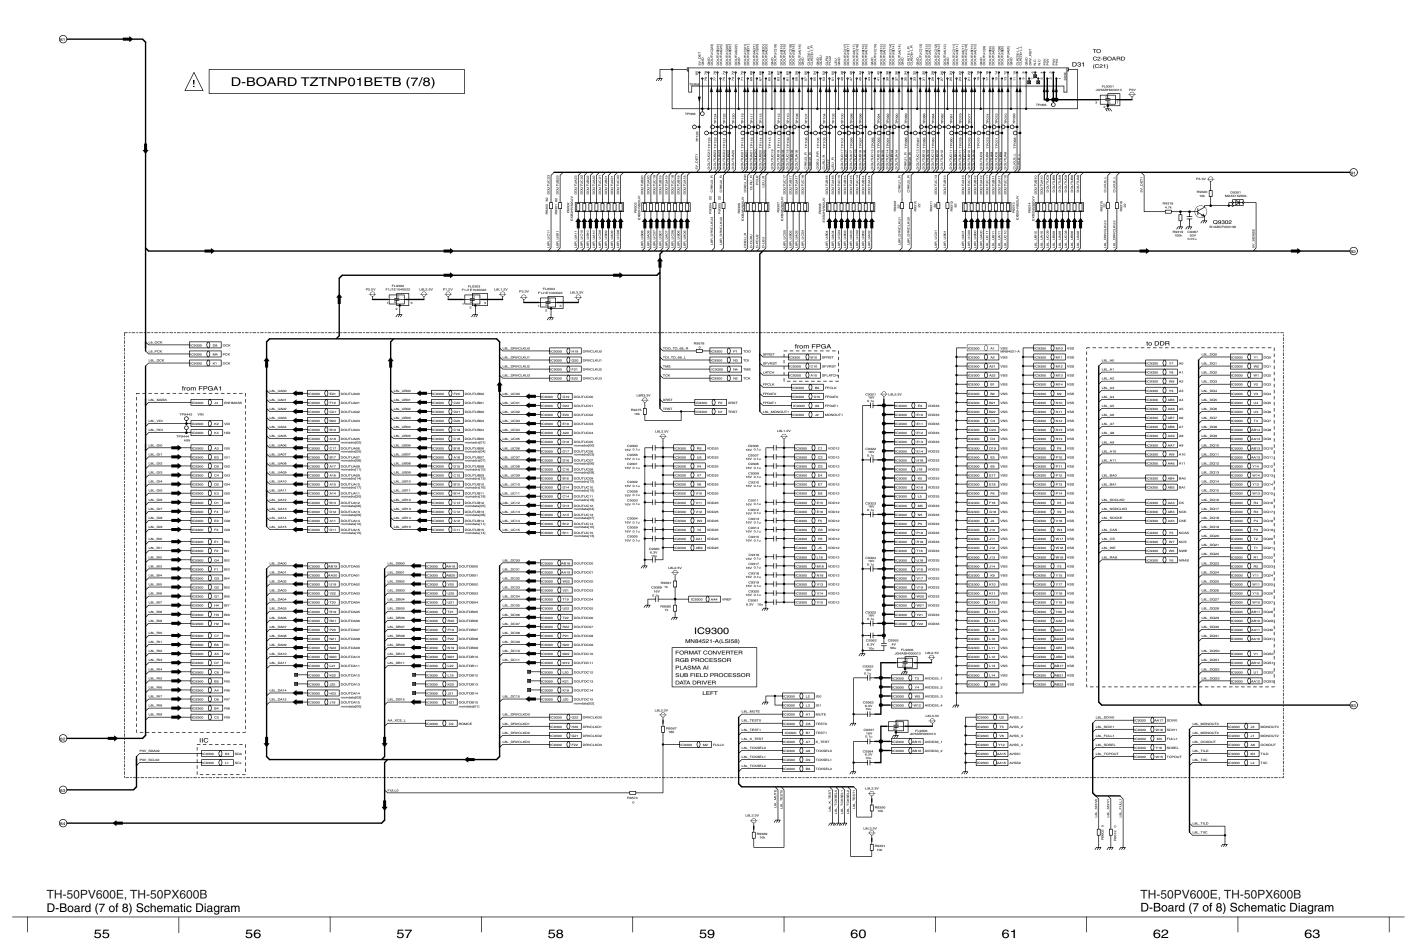


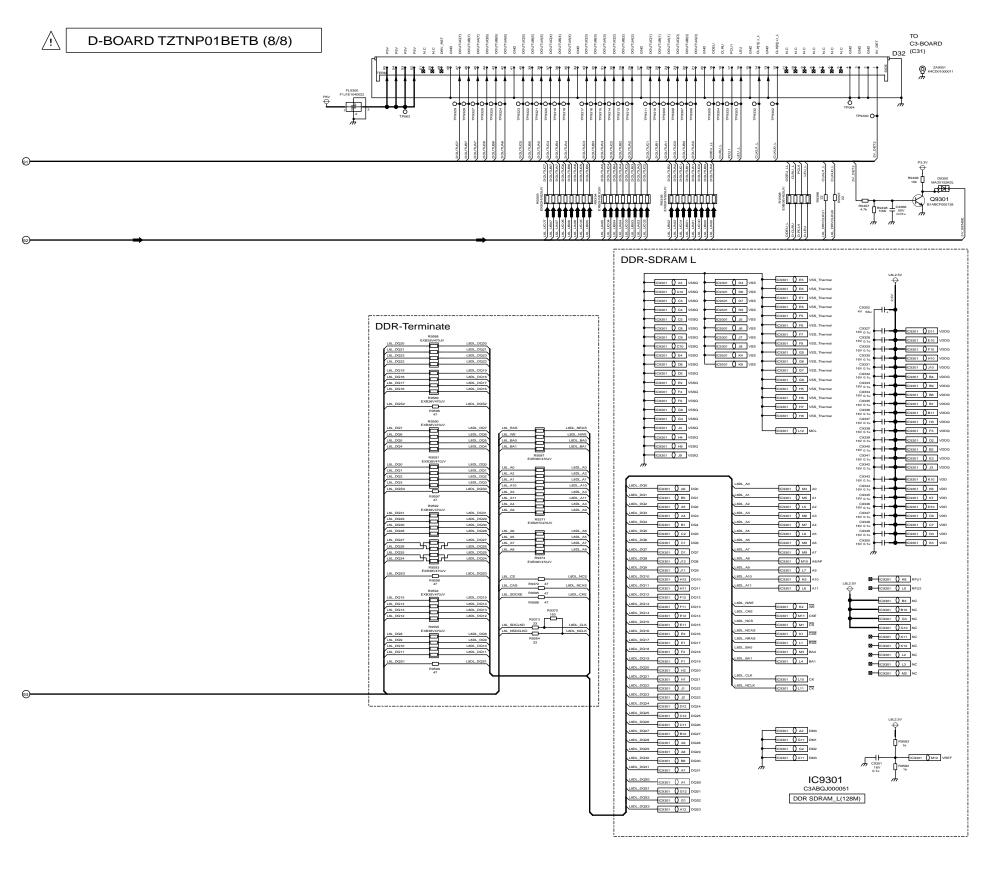



TH-50PV600E, TH-50PX600B
D-Board (8 of 8) Schematic Diagram


64 65 66 67 68 69 70 71 72

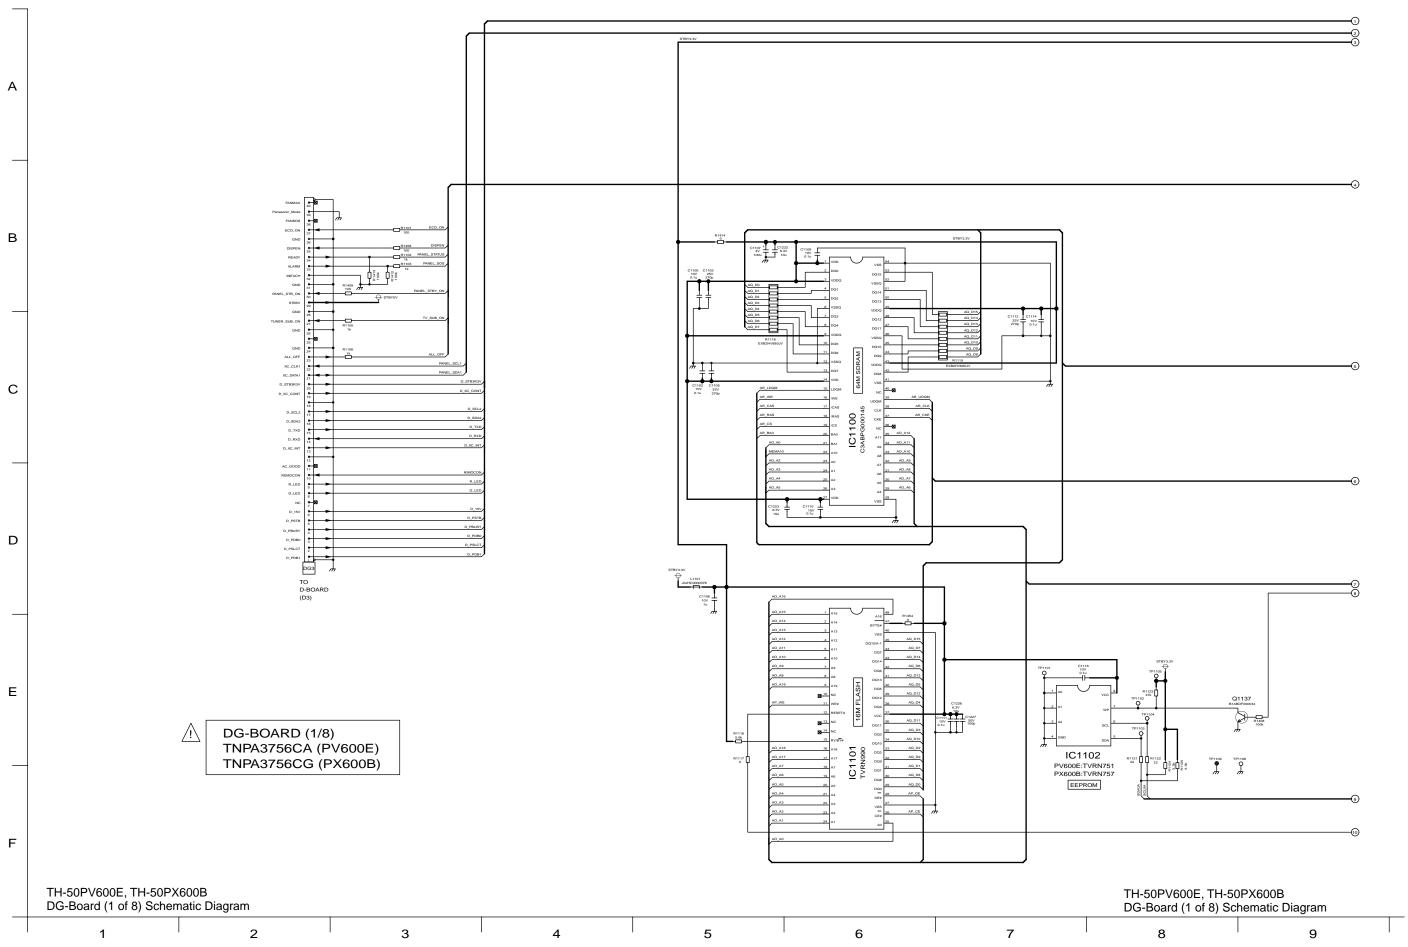


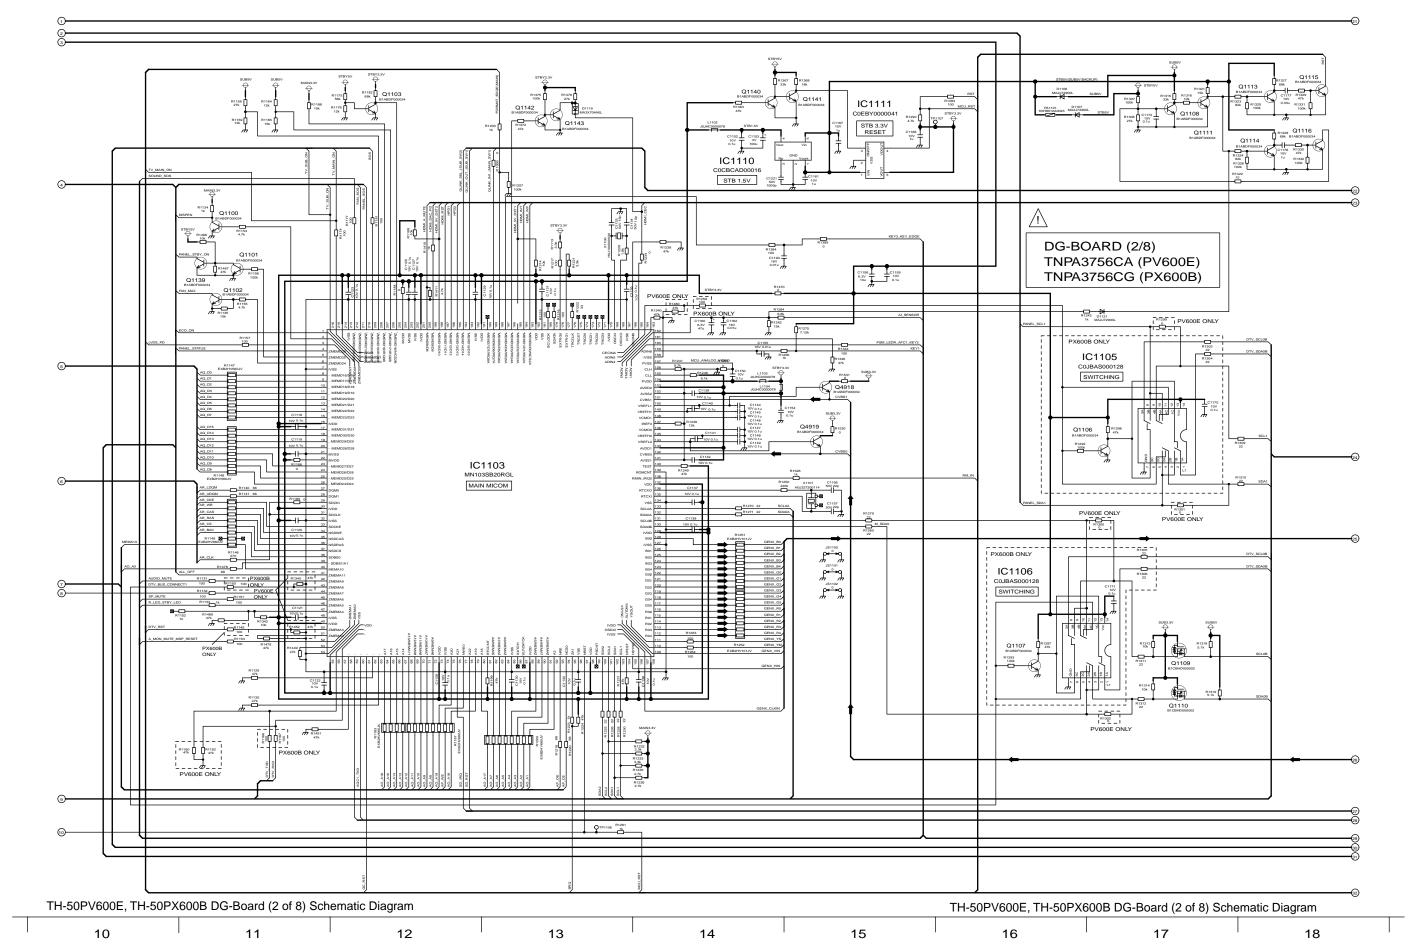


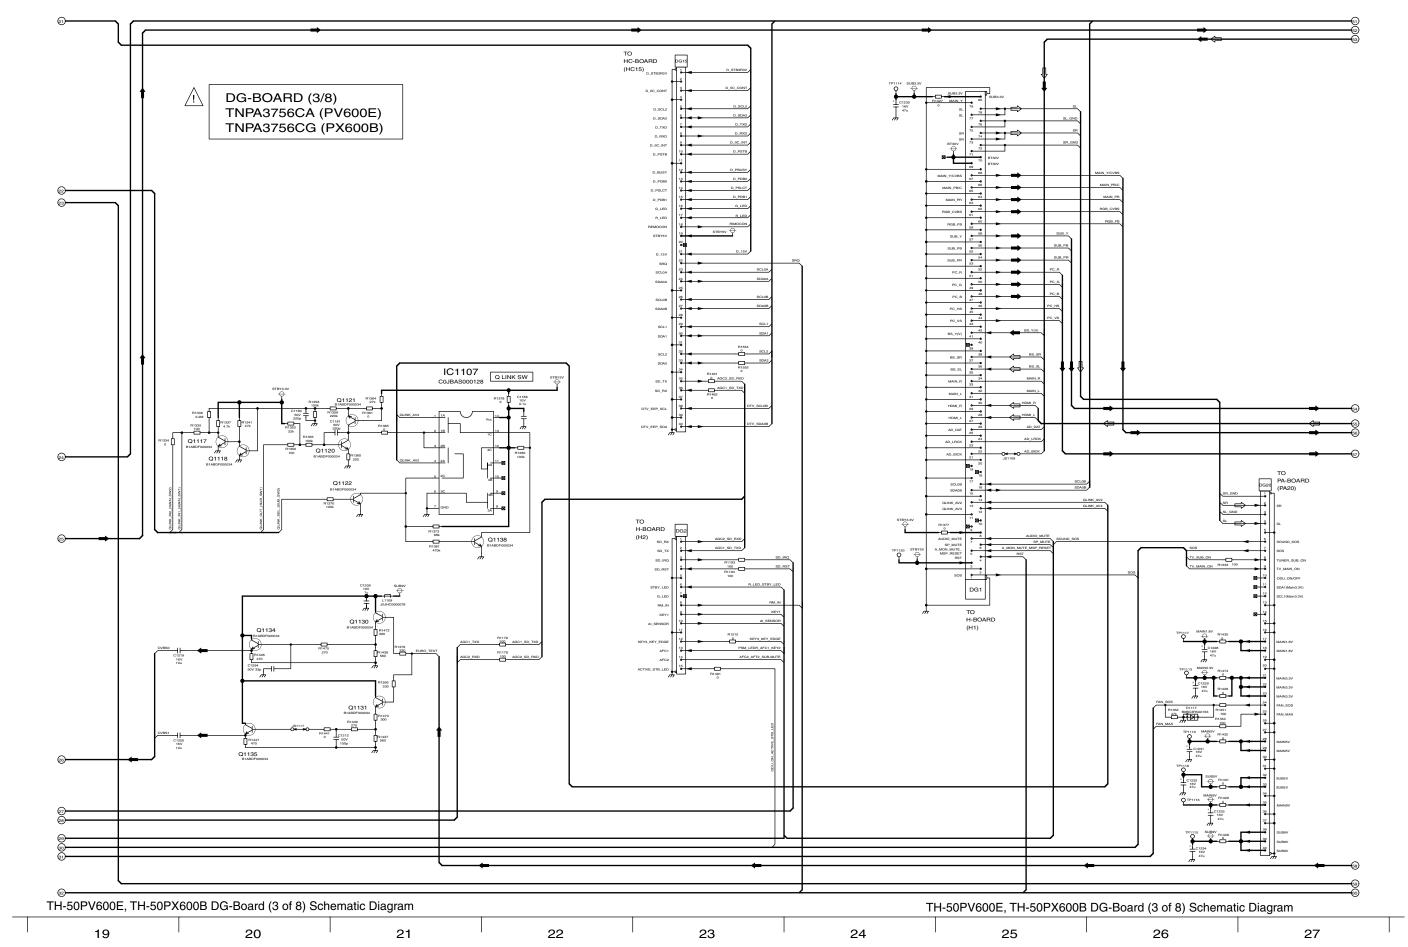


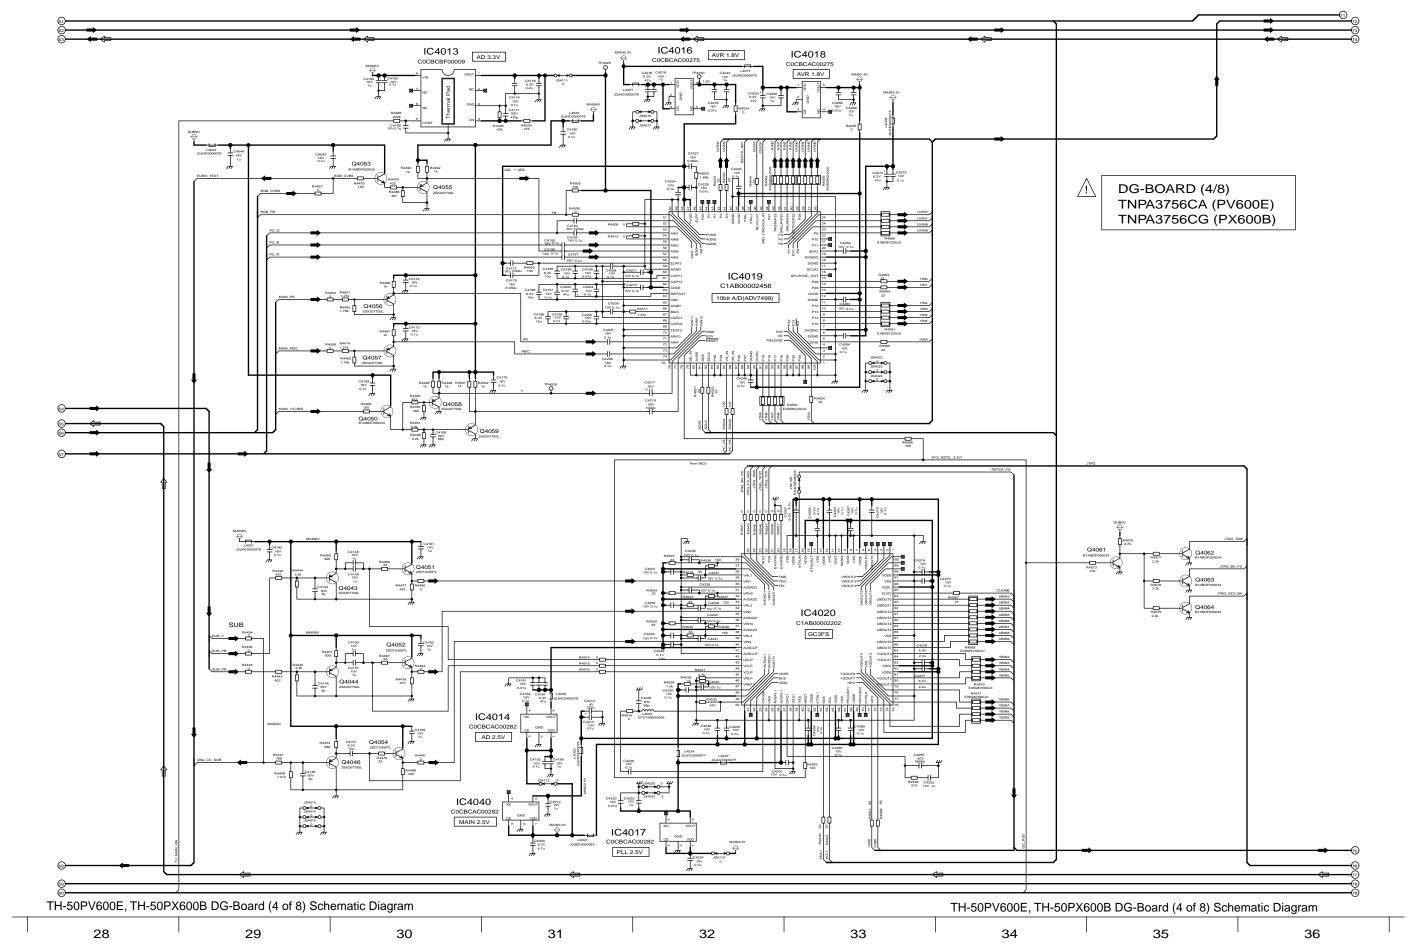


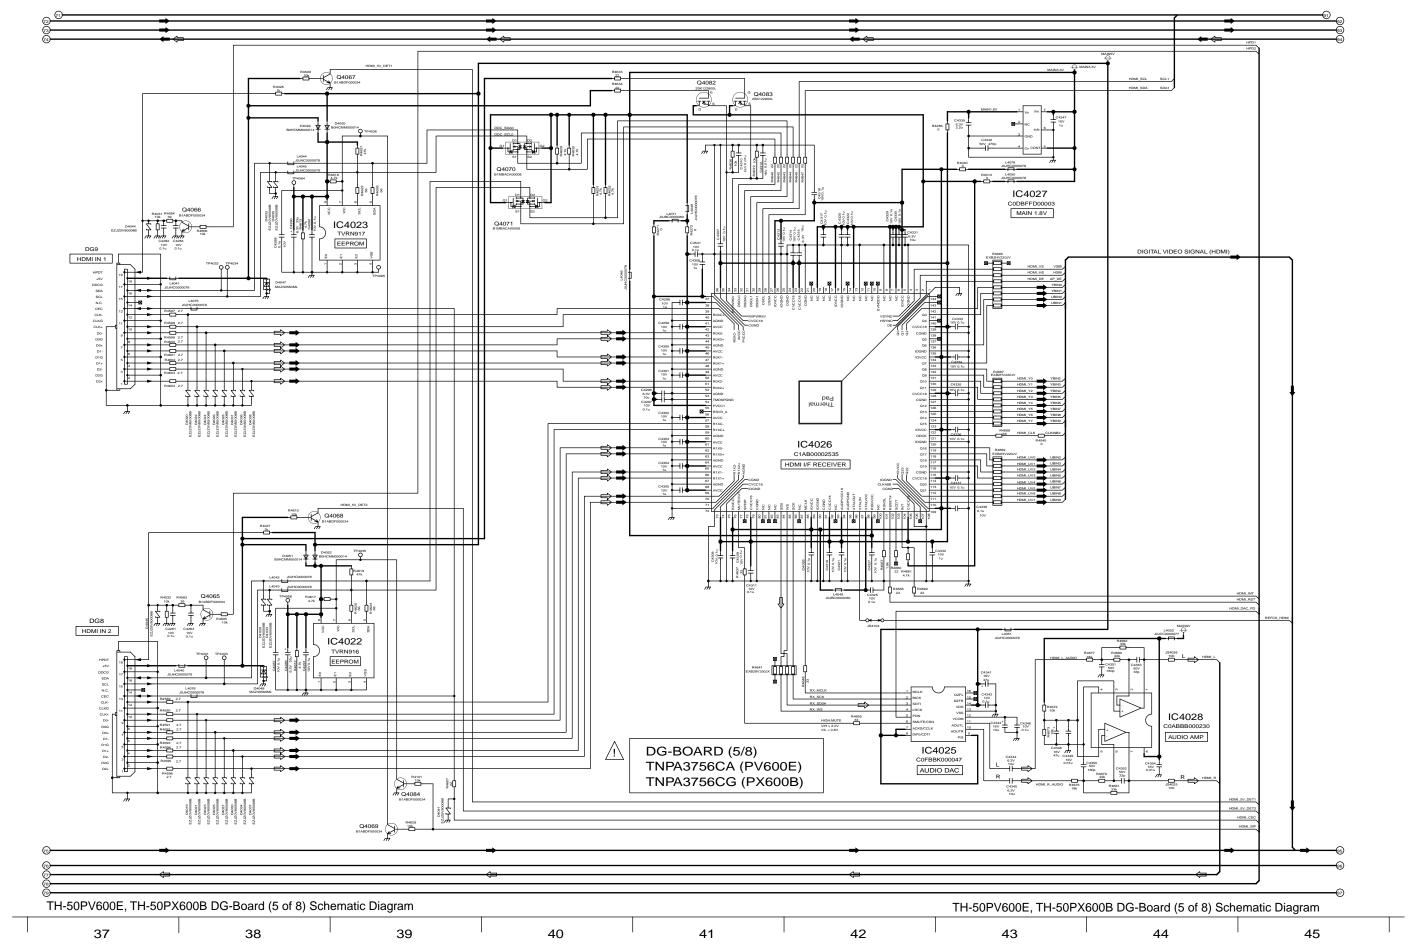


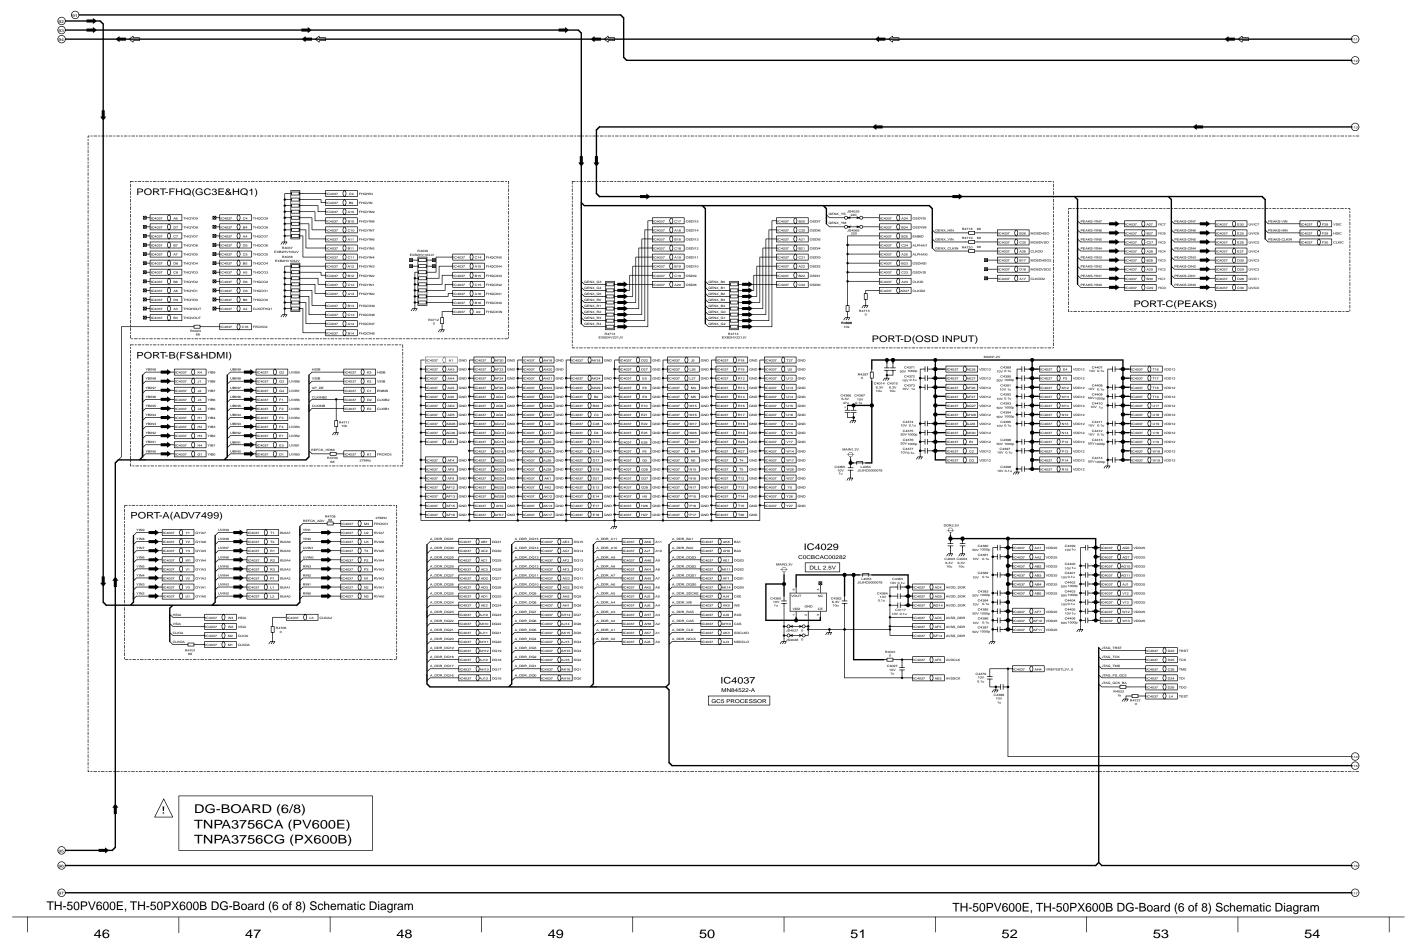


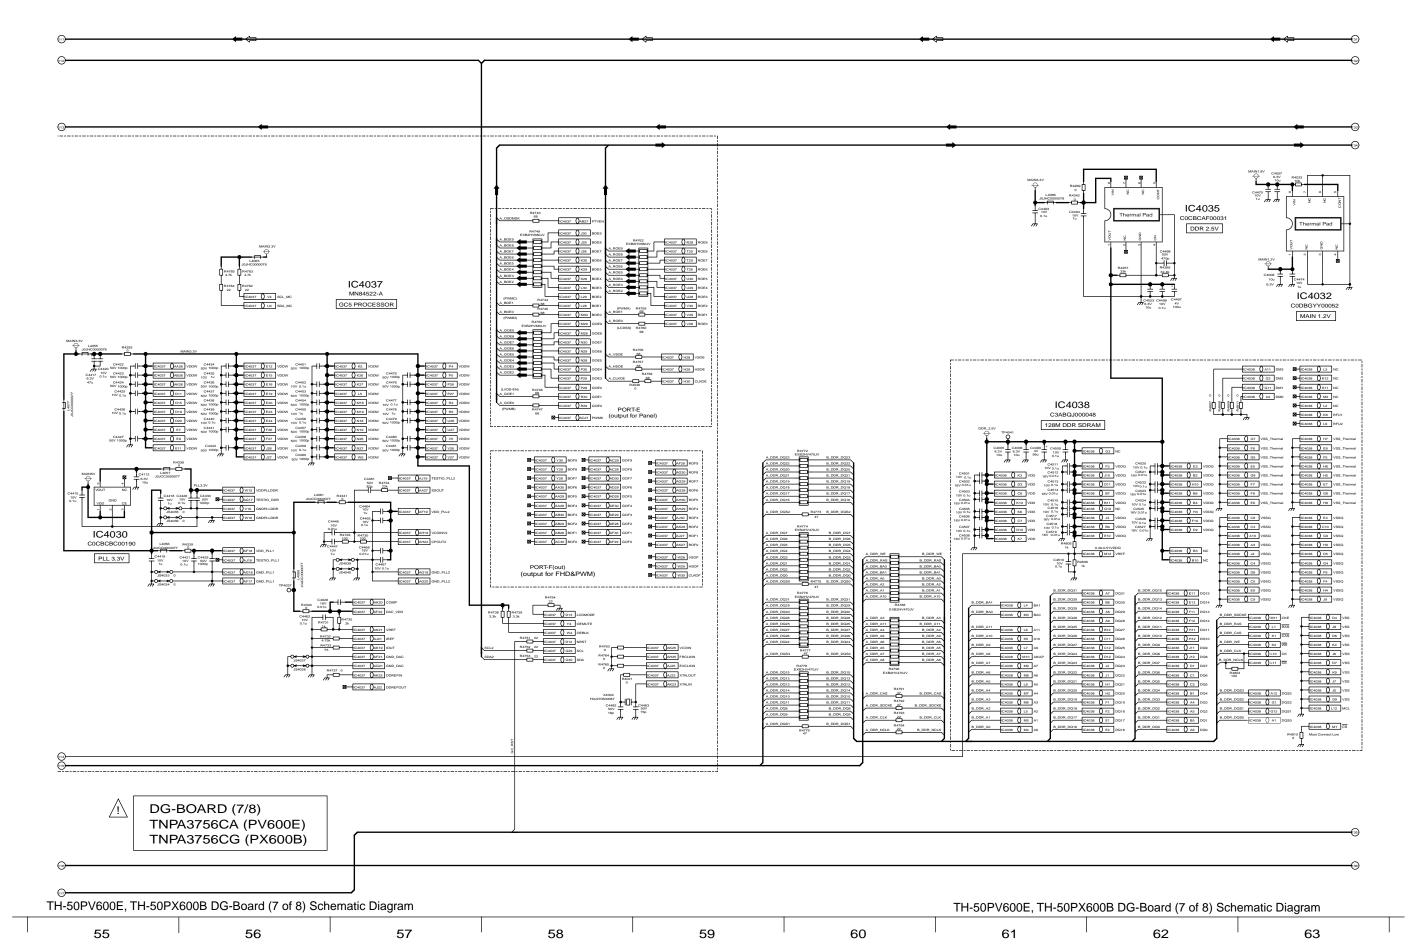


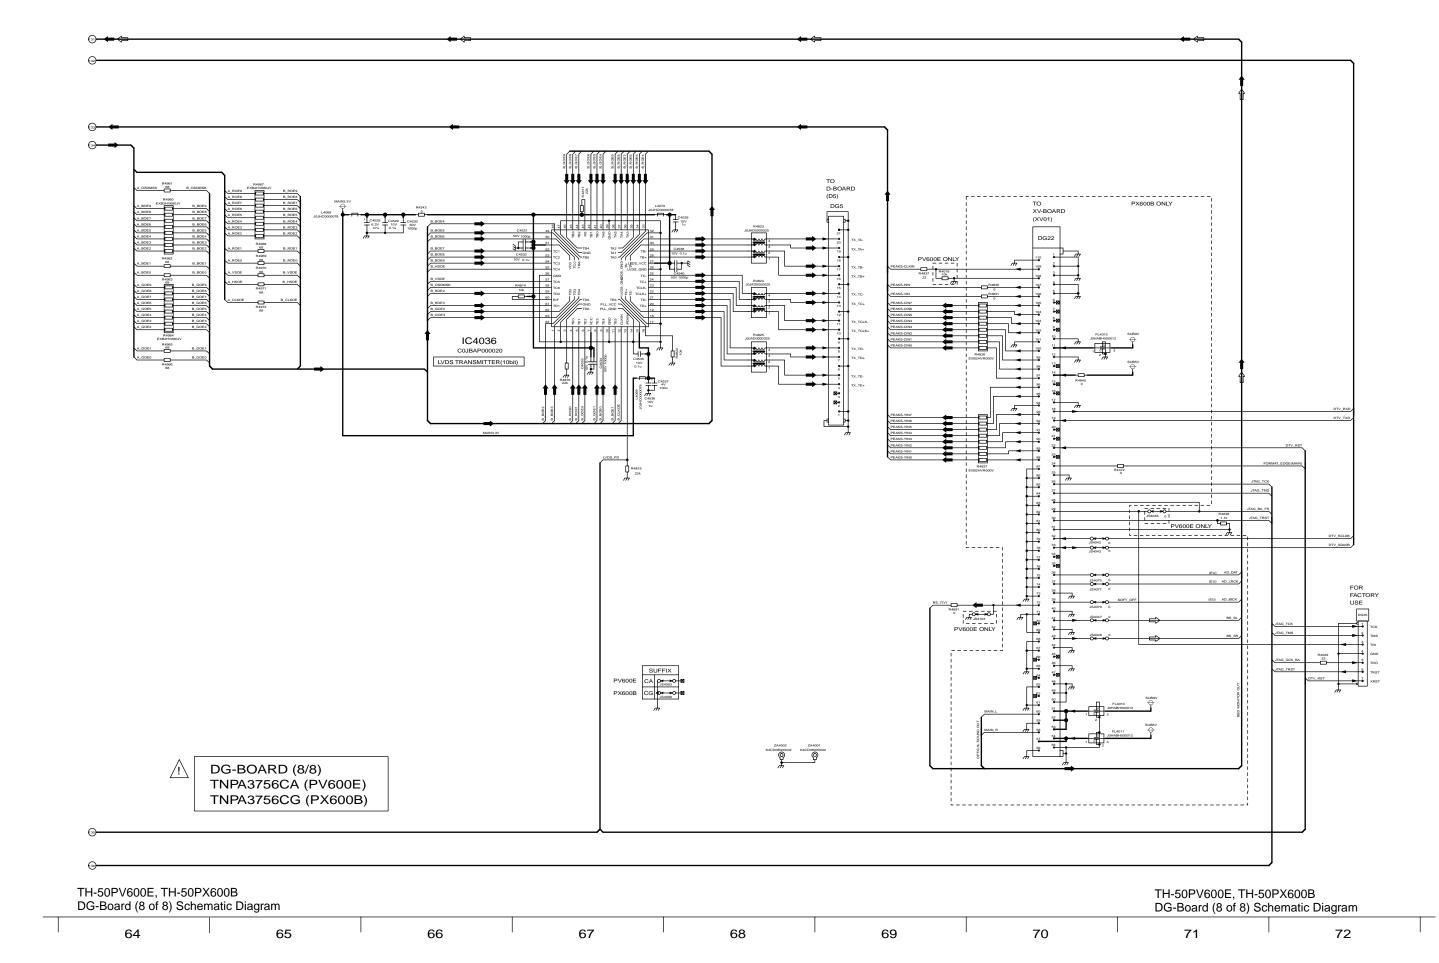


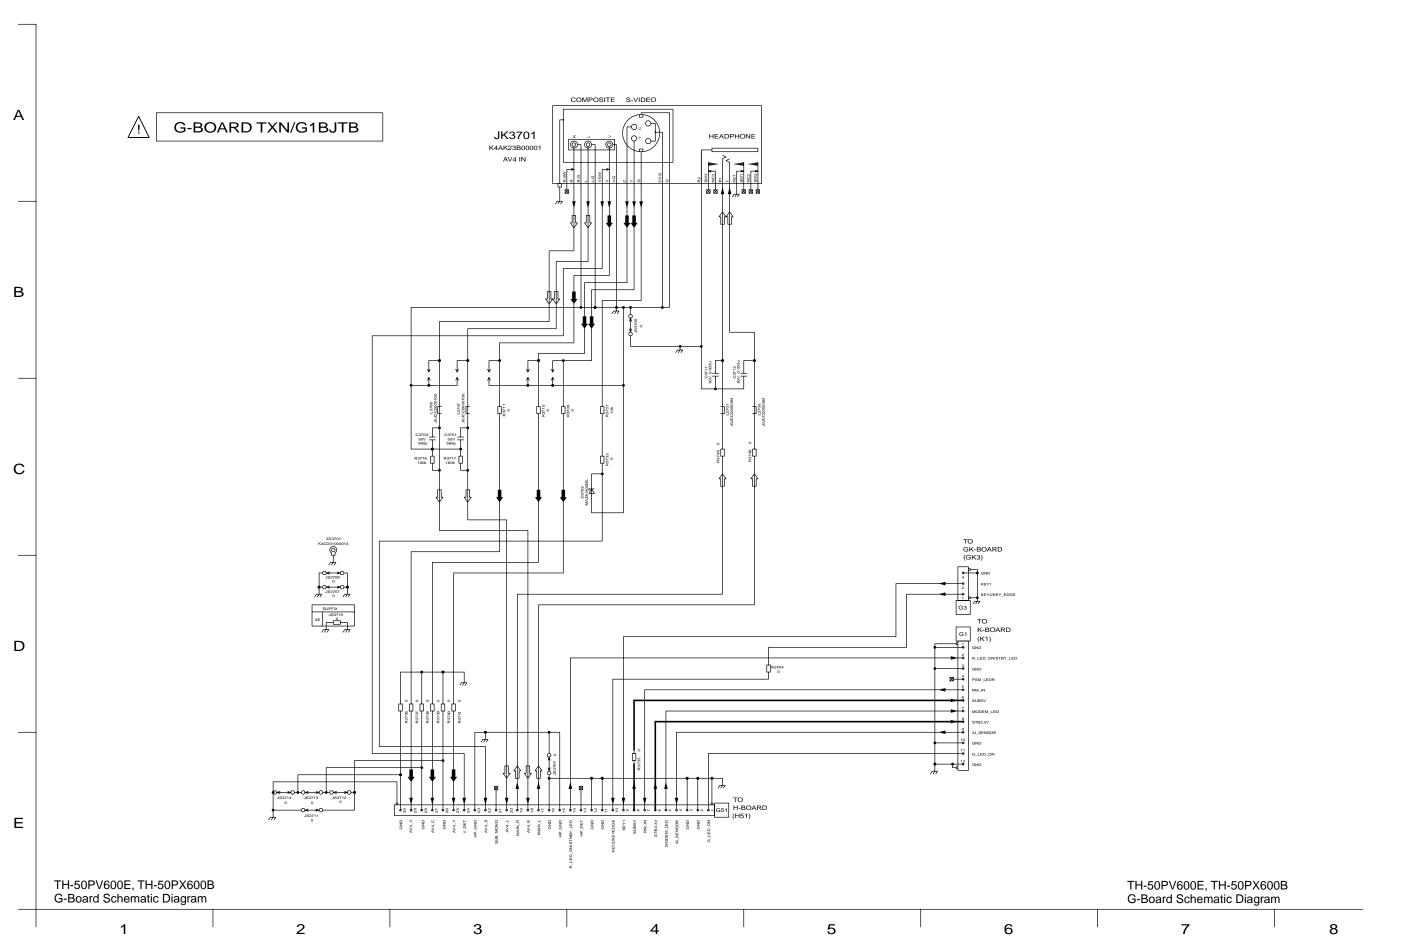


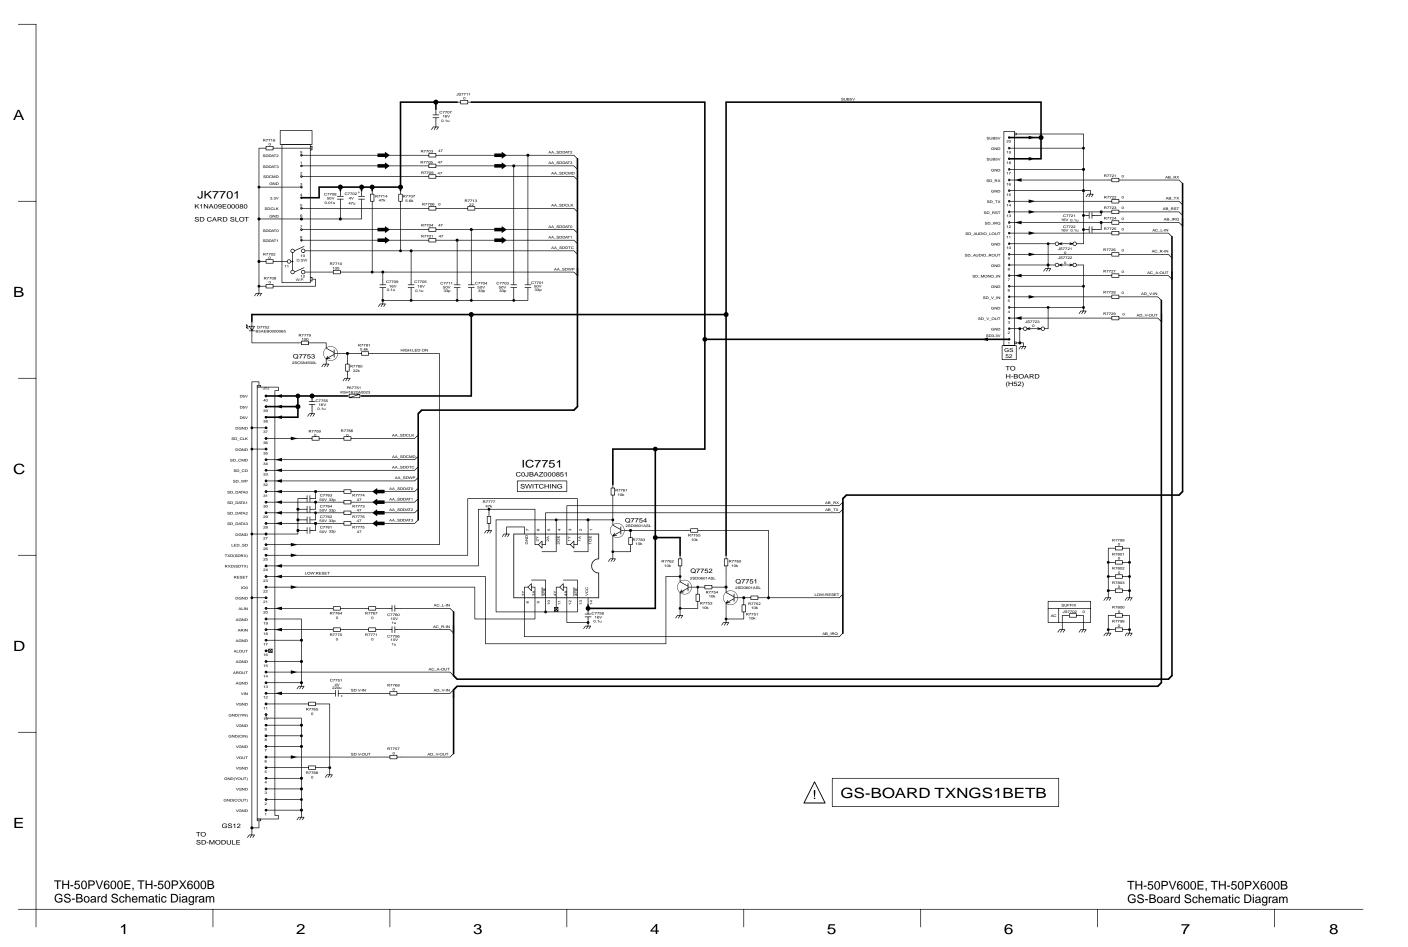


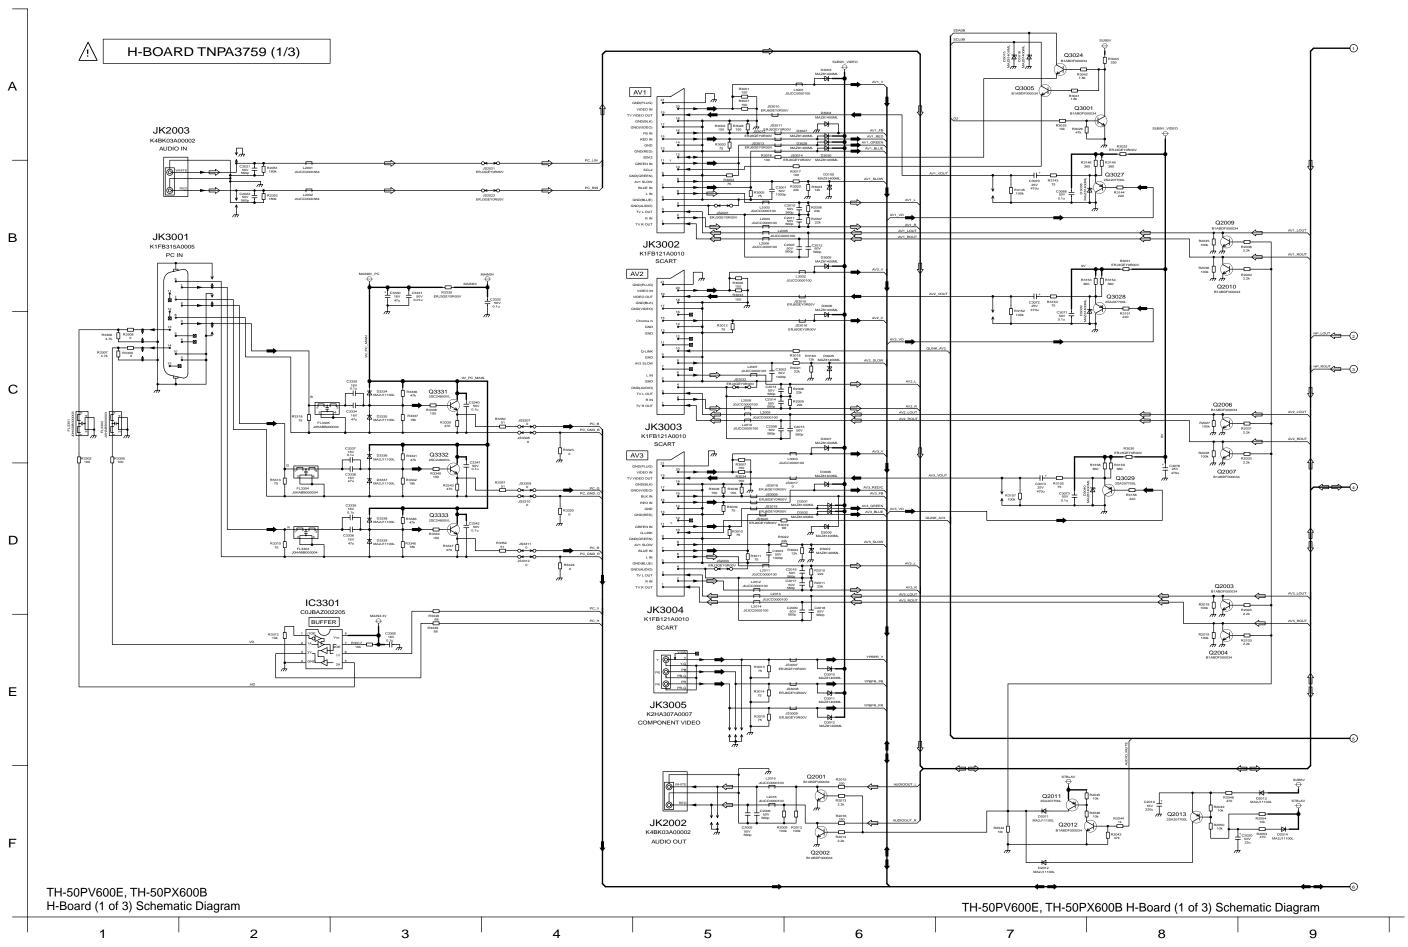


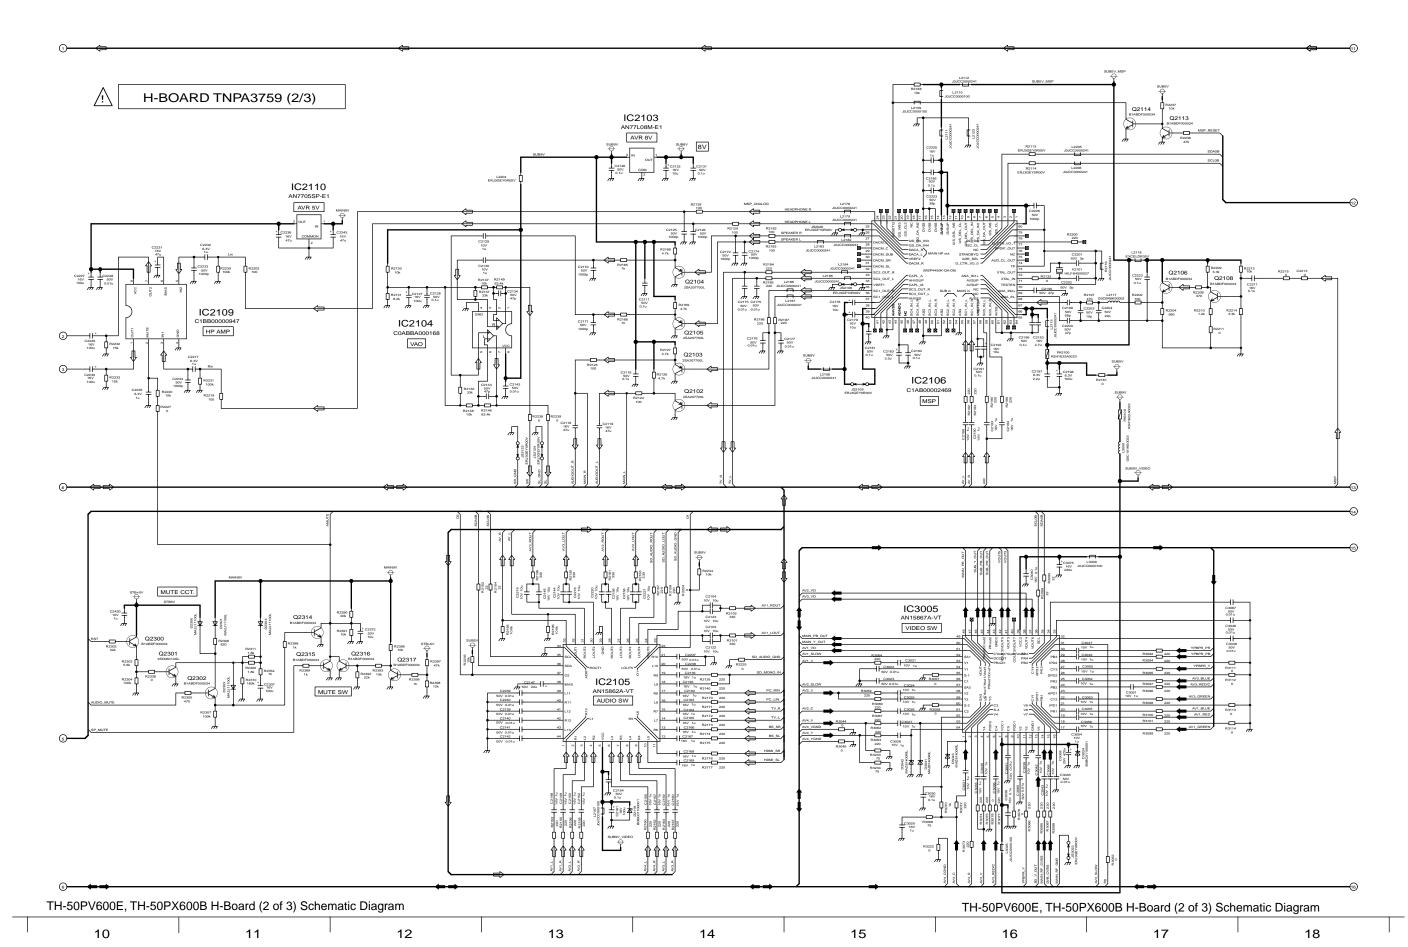


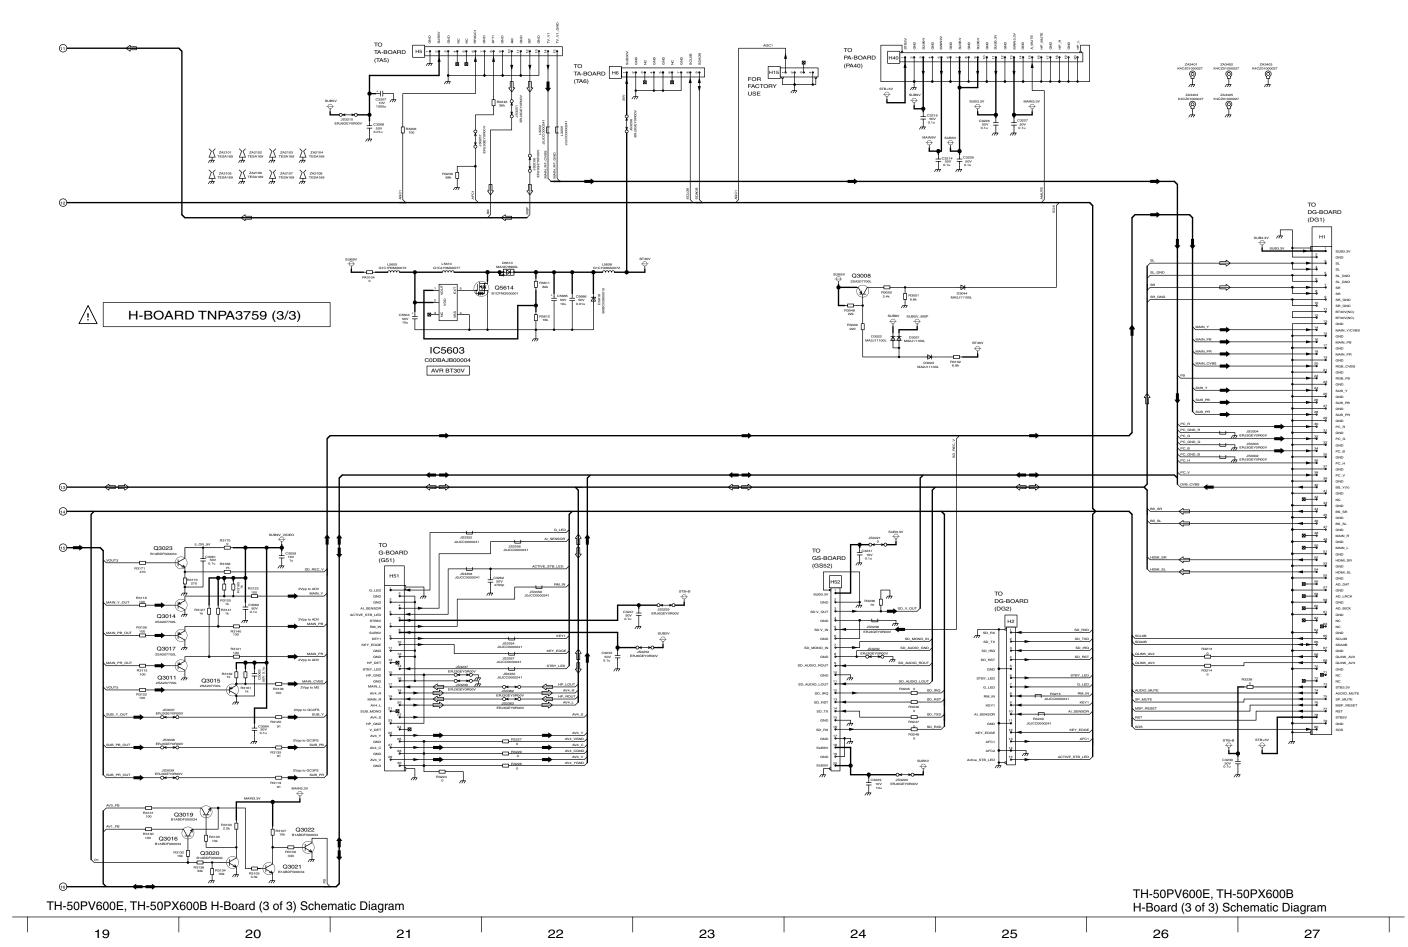


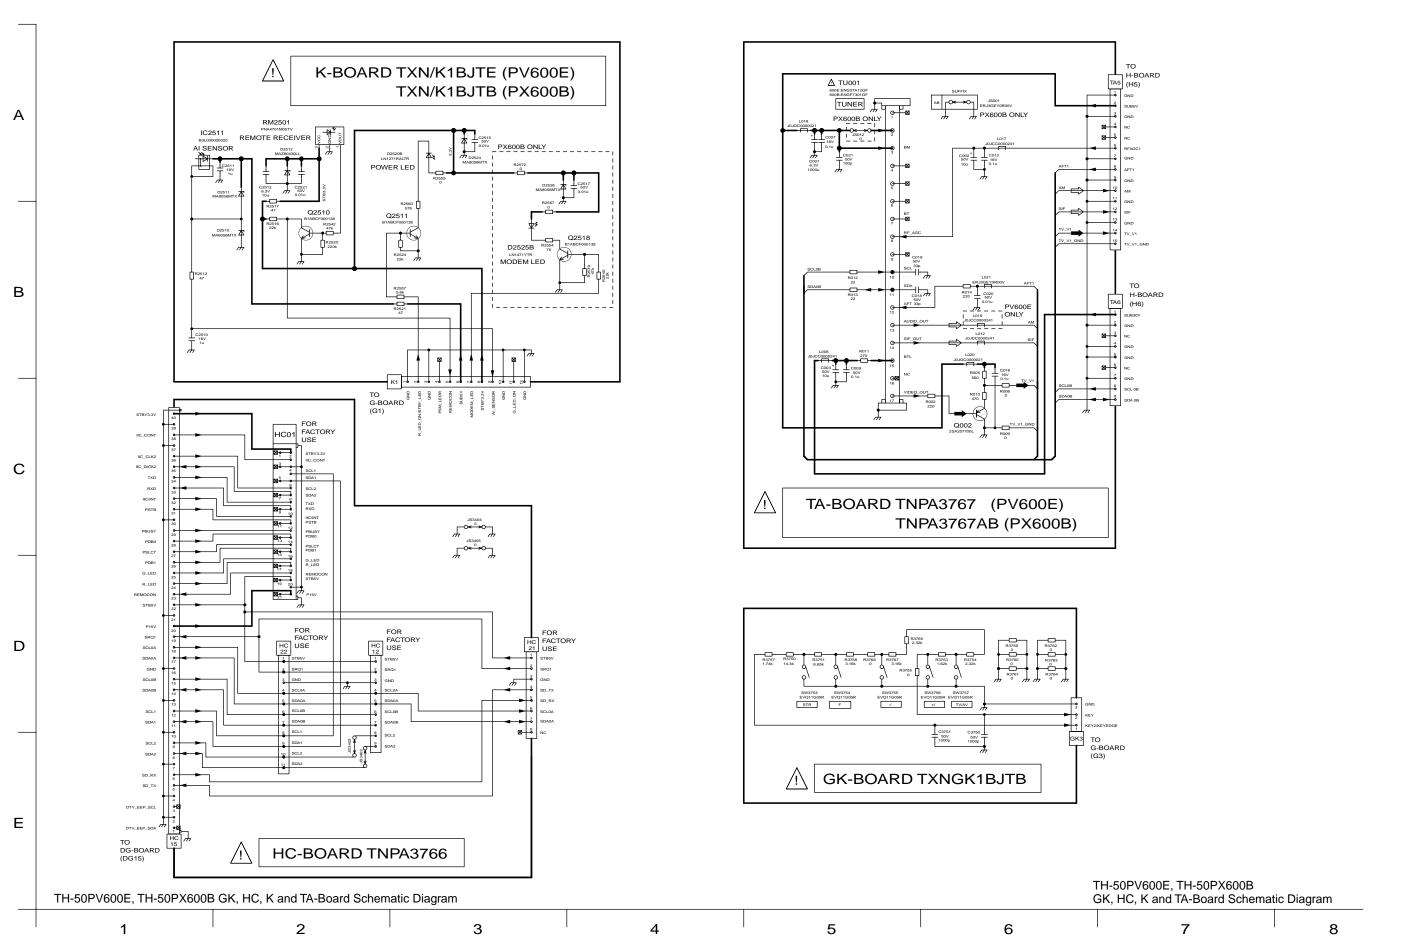


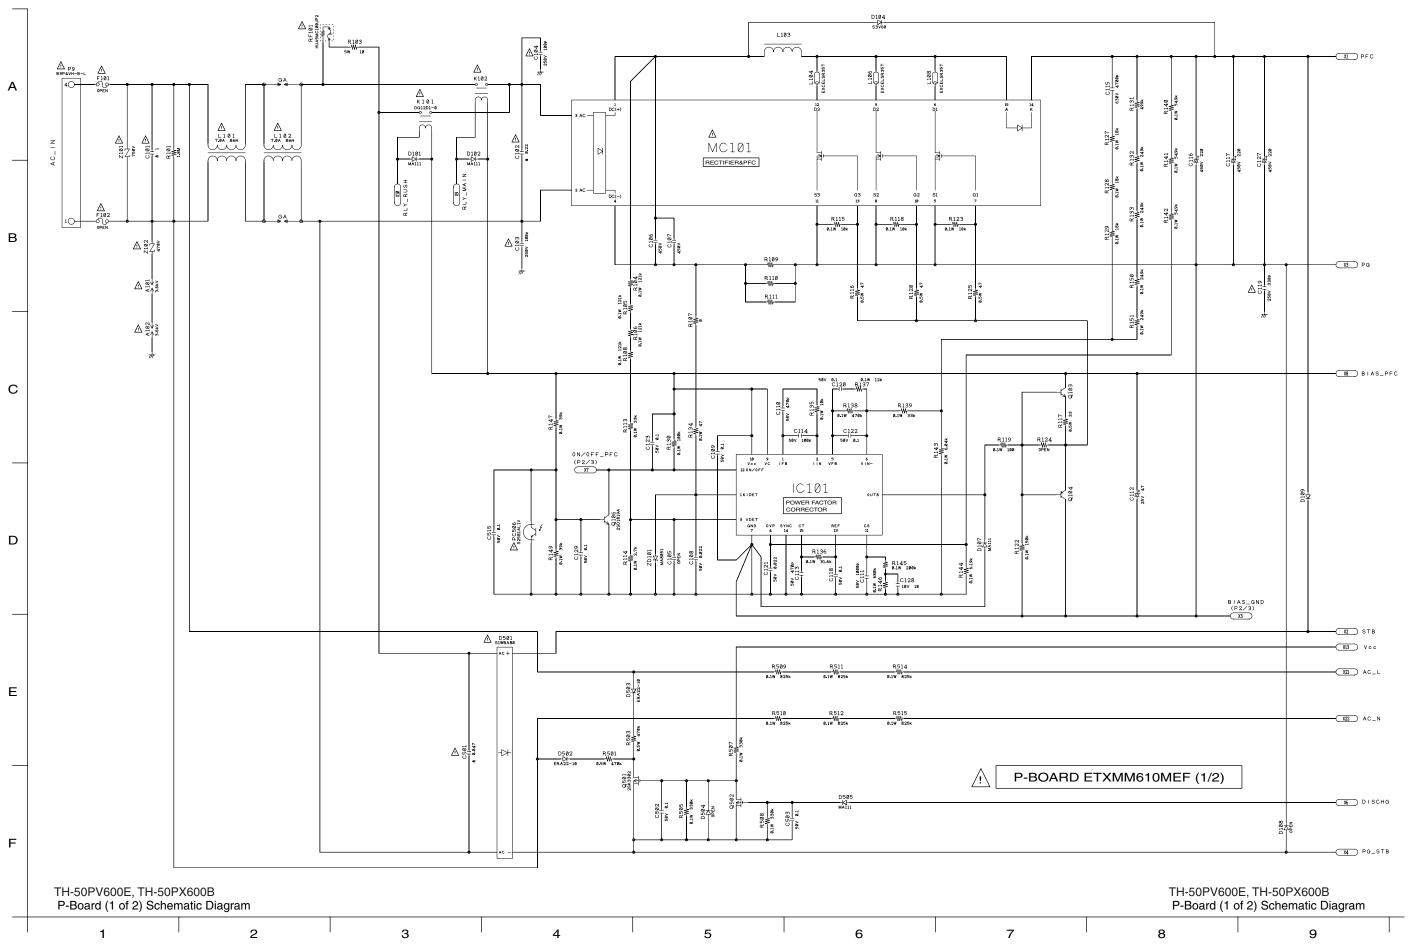


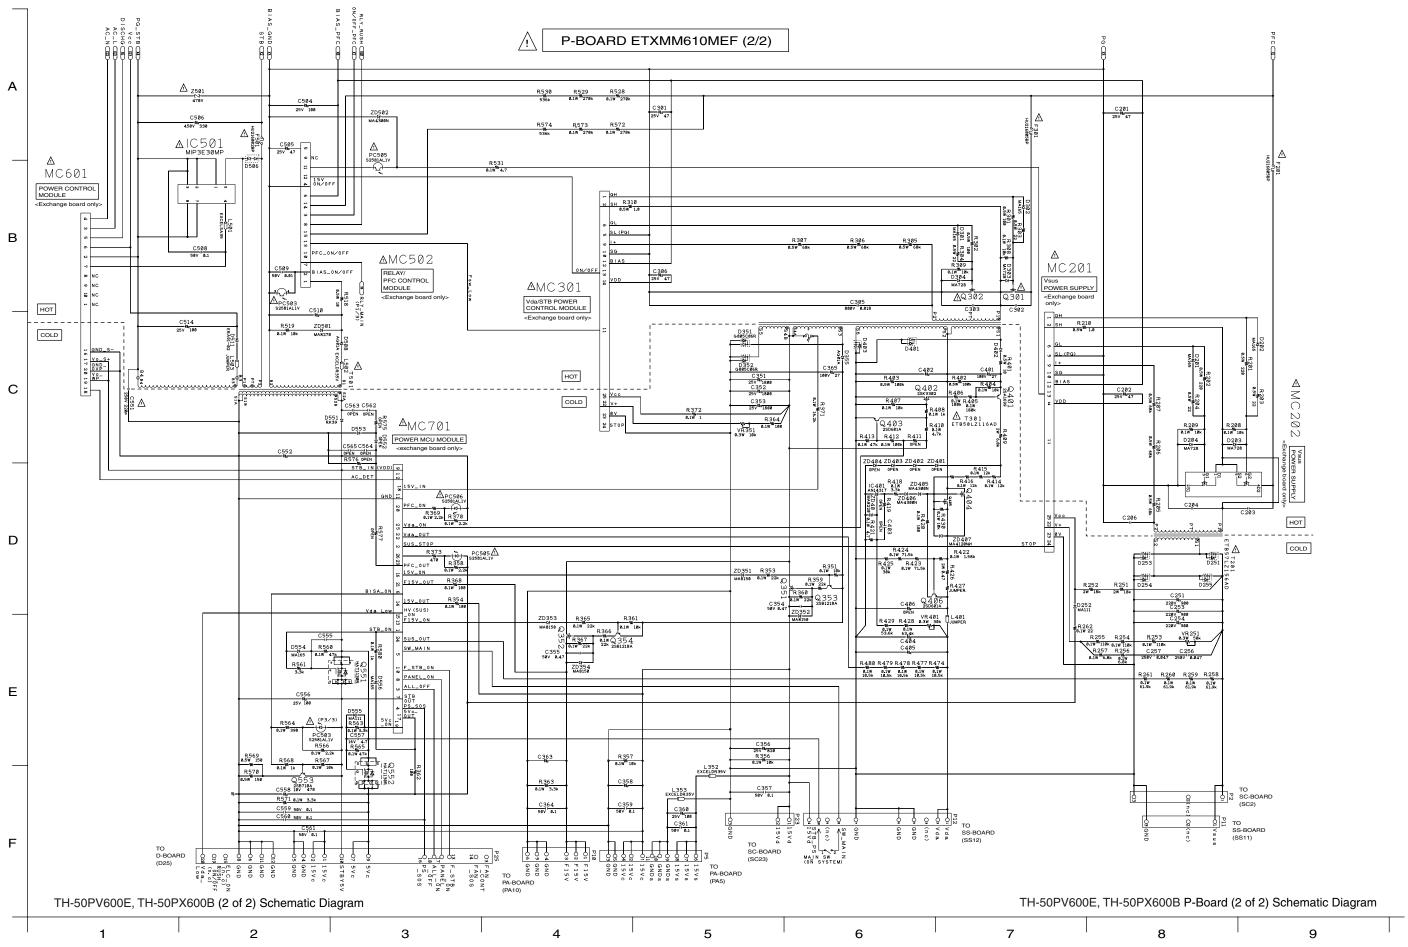


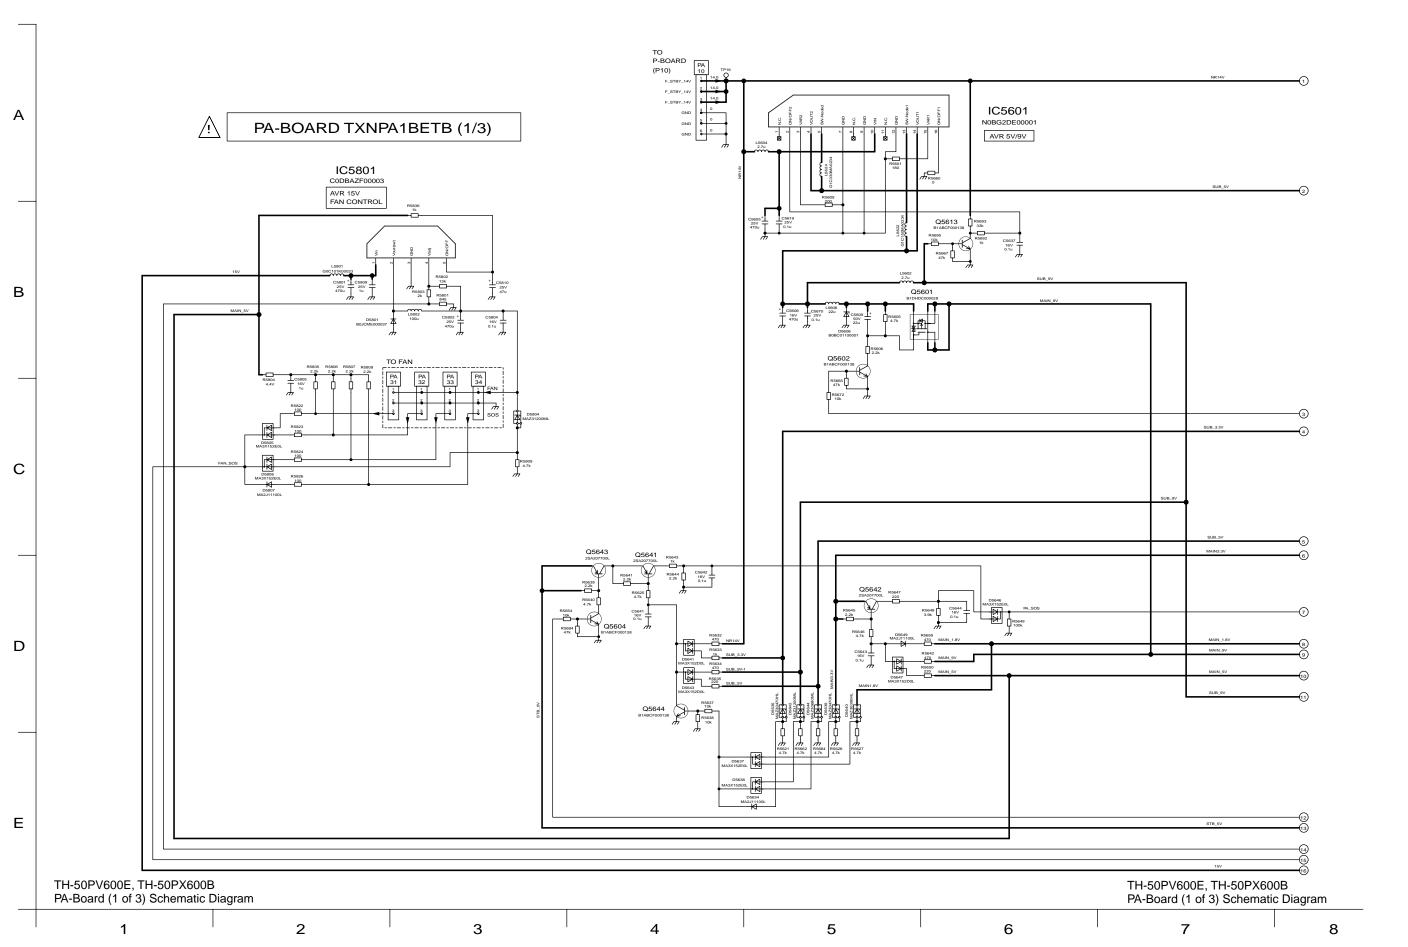


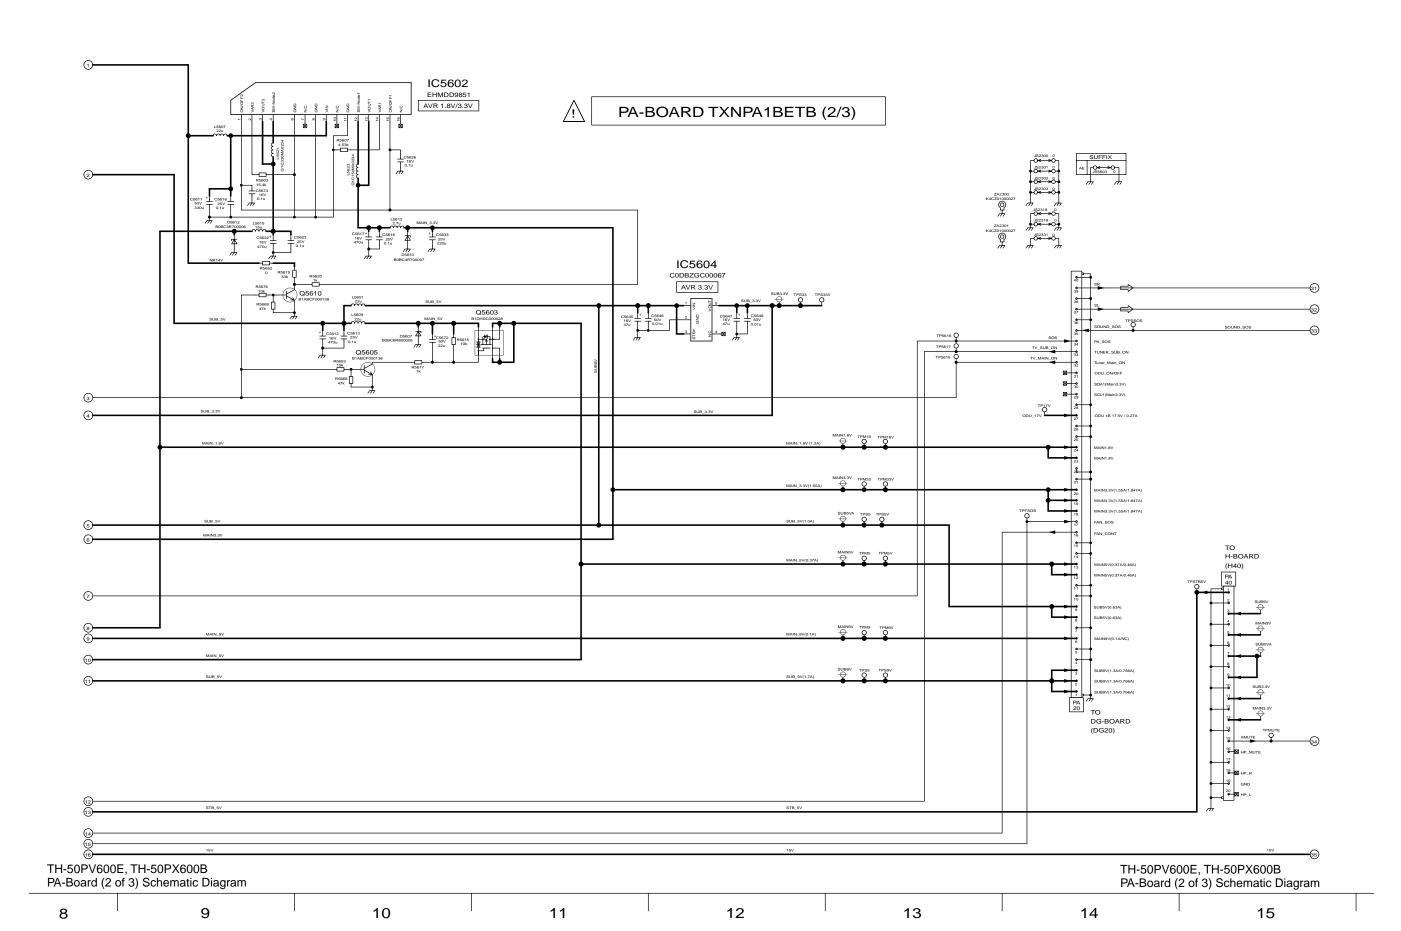


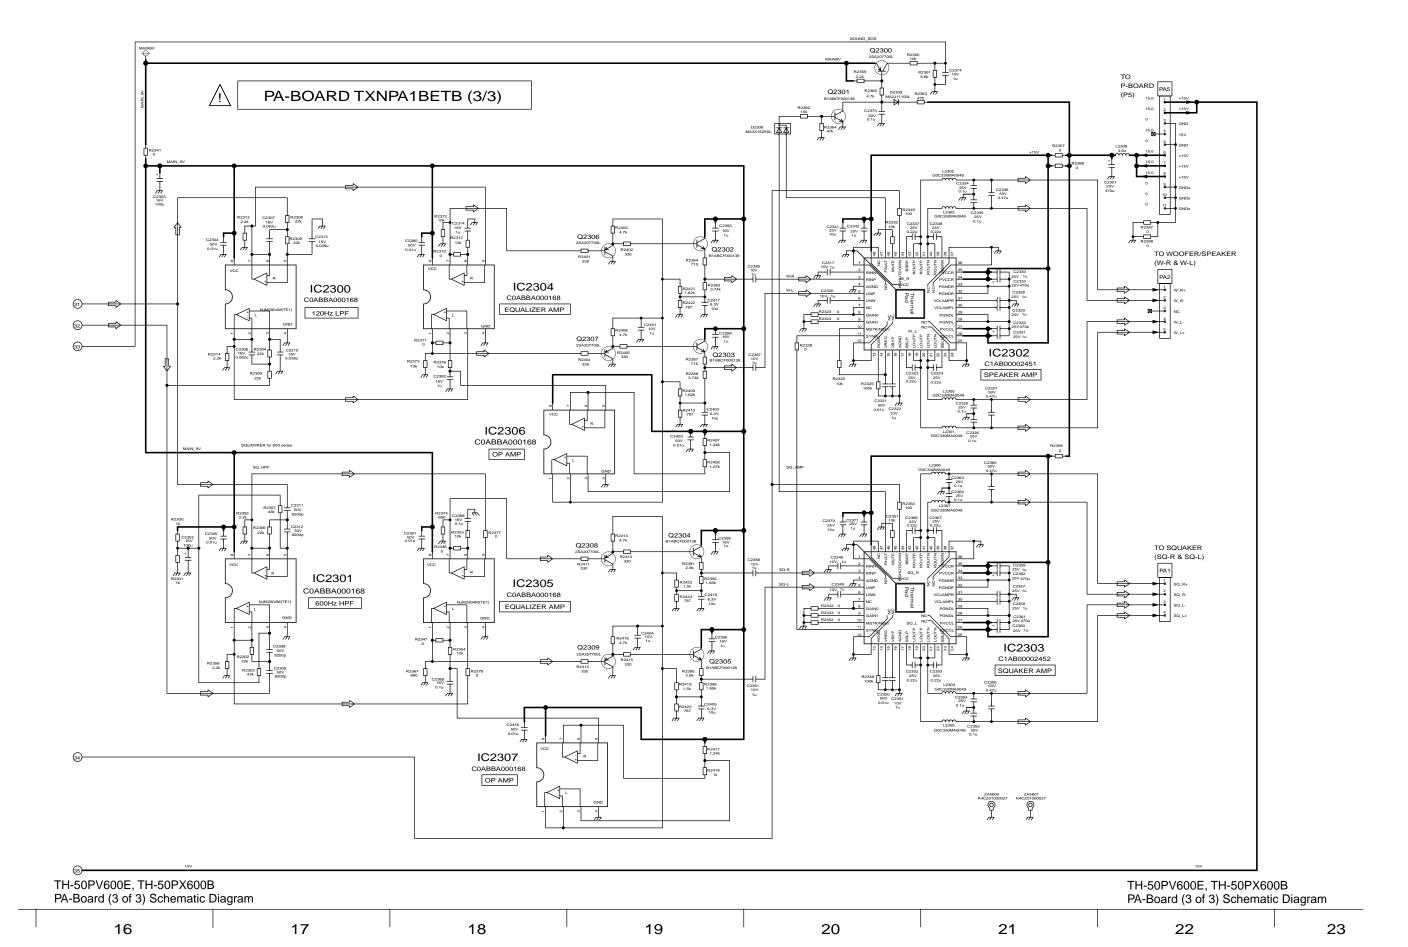

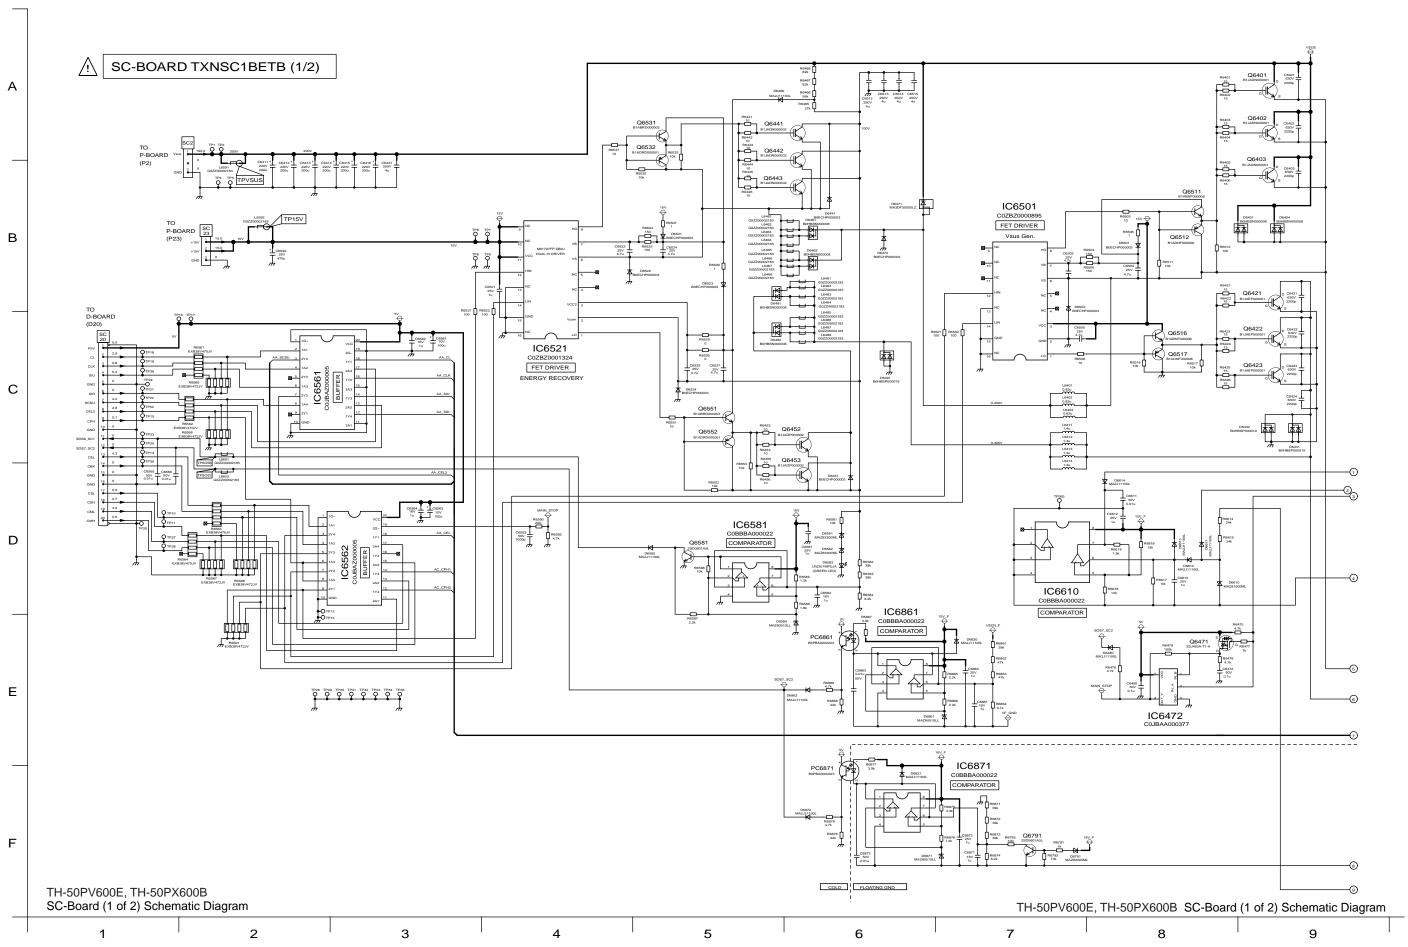

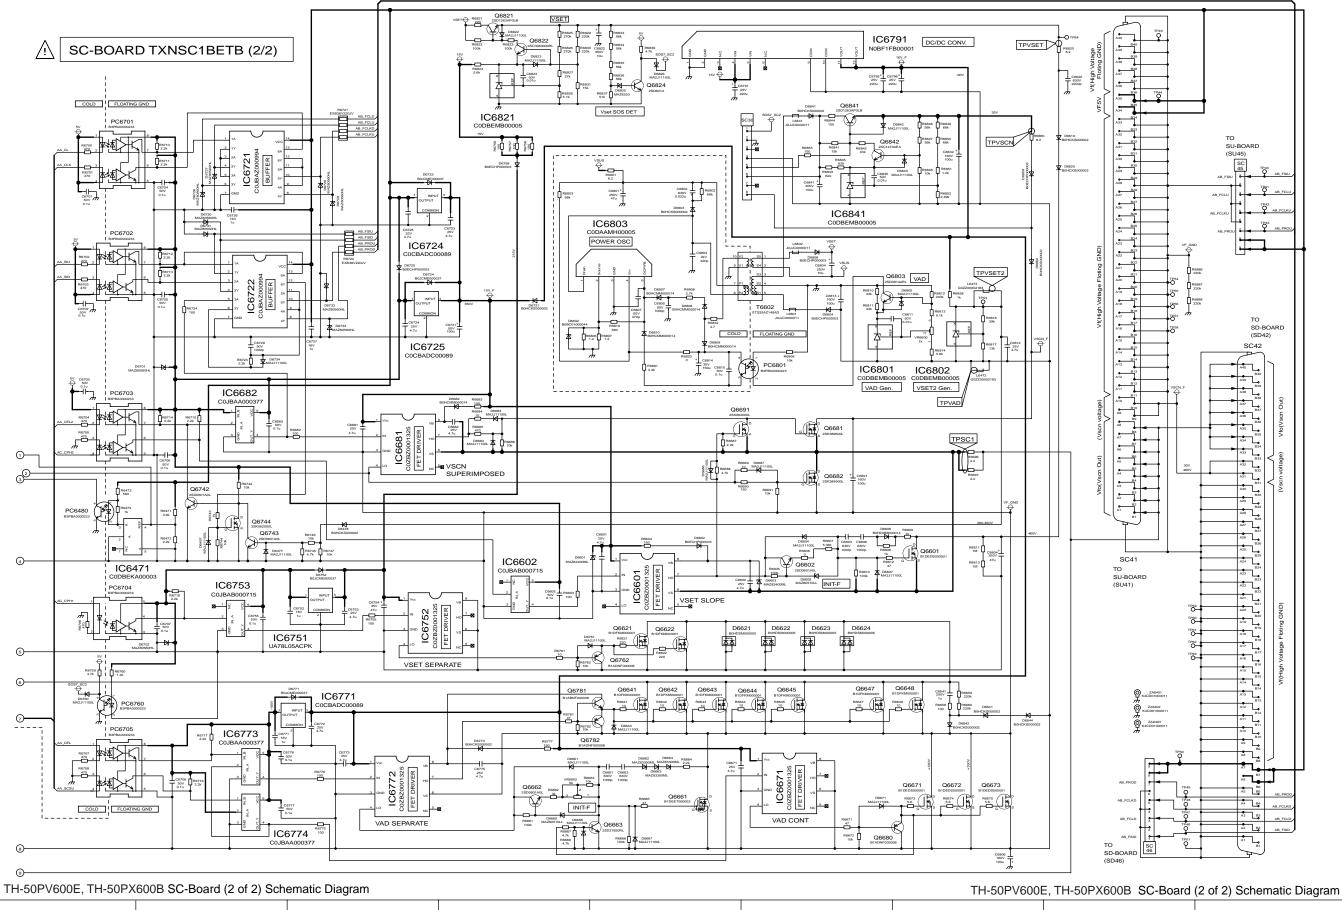

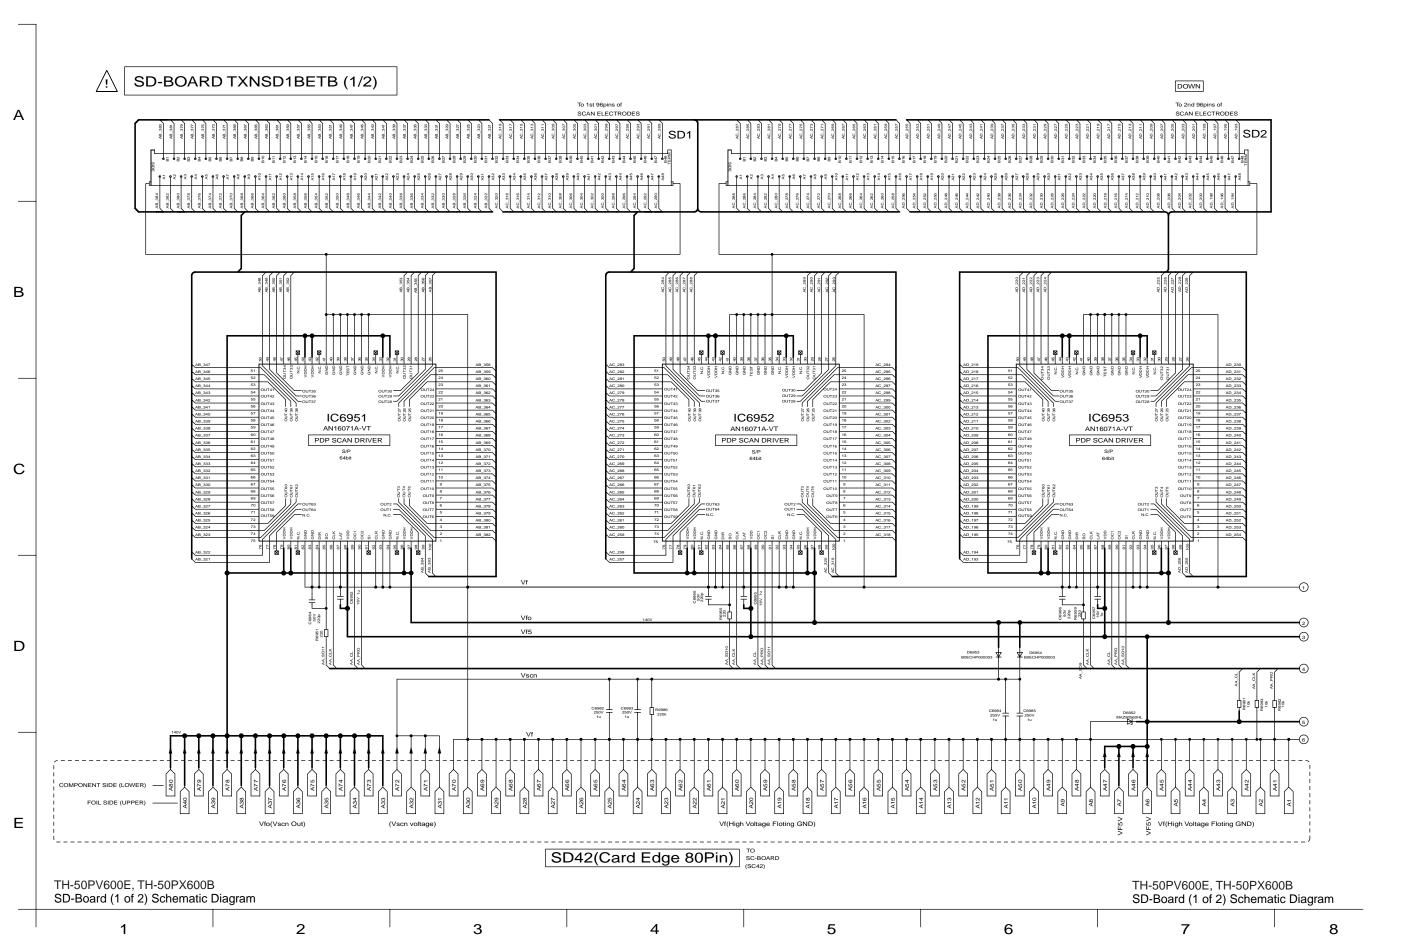

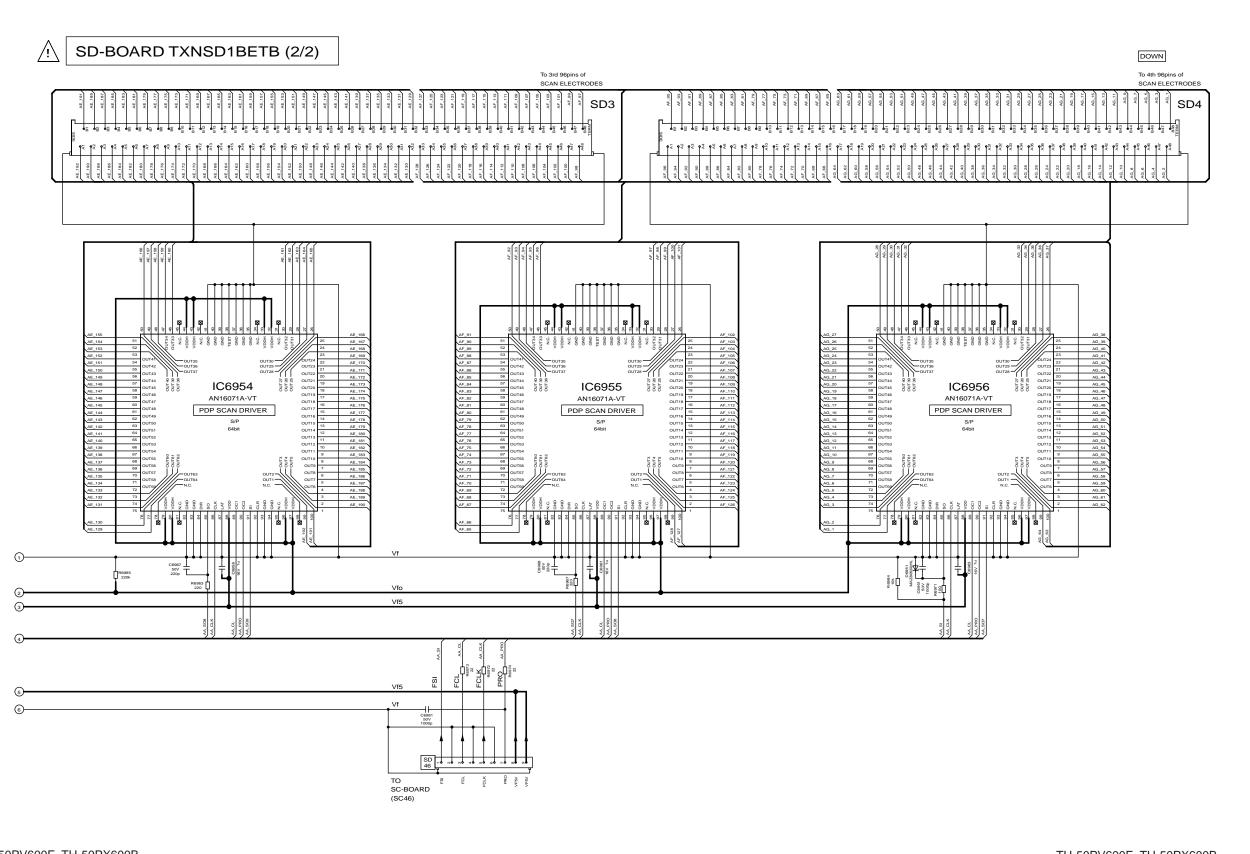

TH-50PV600E, TH-50PX600B
SD-Board (2 of 2) Schematic Diagram

8 9 10 11 12 13 14 15

